


GROUP 51
EXTERIOR

GENERAL

OUTLINE OF CHANGE

- The service procedures have been established to correspond to the adoption of the remote-controlled door mirror with printed heating wire.

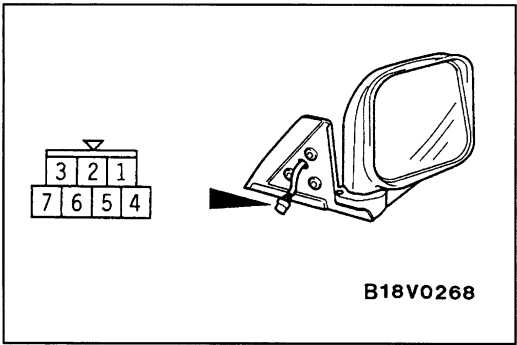

DOOR MIRROR

INSPECTION

REMOTE-CONTROLLED MIRROR ASSEMBLY CHECK

Check to be sure that the mirror moves as described in the table when each terminal is connected to the battery.

Battery connection terminal			Operation direction
5	6	7	
⊖		⊕	UP
⊕		⊖	DOWN
⊖	⊕		RIGHT
⊕	⊖		LEFT

PRINTED HEATING WIRE CHECK

For the remote-controlled door mirror with printed heating wire, check to be sure that there is a continuity between the terminal 1 and the terminal 4.