


5 SYNTHETIC-RESIN PARTS


LOCATION OF SYNTHETIC-RESIN PARTS 5-2

LOCATION OF SYNTHETIC-RESIN PARTS

<3 DOOR>

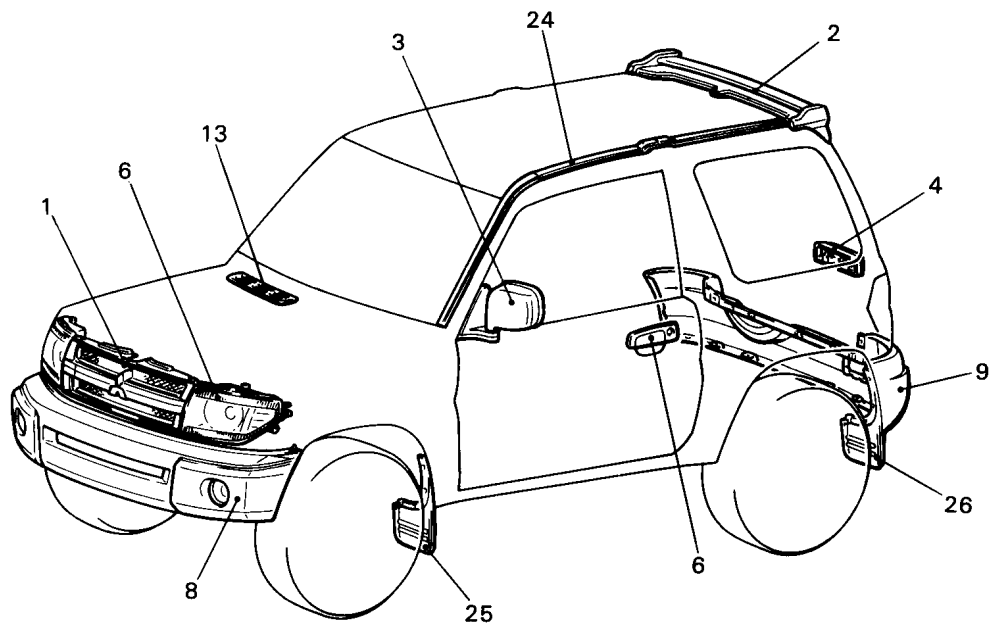

W0341AM

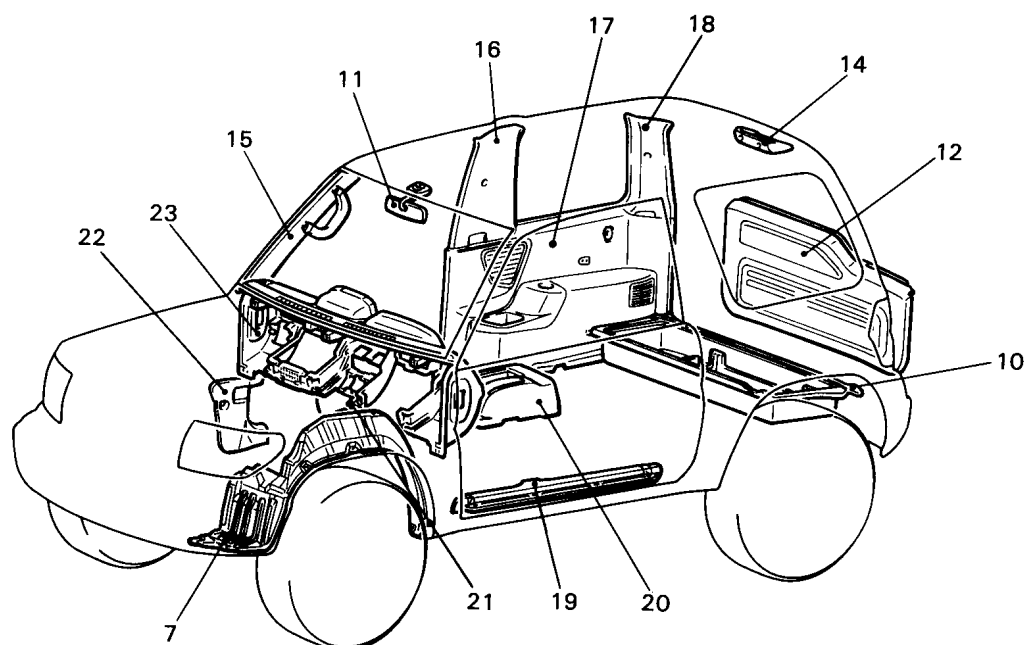



W0338AM

No.	Part name	Name of resin	Abbreviation	Heat-withstand temp. (°C)
1 2	Radiator grille Rear spoiler	Acrylonitrile butadiene styrene	ABS	80 – 110
3 4	Door mirror License lamp garnish	Acrylonitrile styrene acrylate	ASA (AAS)	80 – 100
5	Headlamp	Polycarbonate	PC	130 – 140
6	Door outside handle	Polycarbonate + Polyethylene terephthalate	PC + PET	140 – 150
7	Splash shield	Polyethylene	PE	70 – 90
8 9 10 11 12	Front bumper face Rear bumper face Luggage floor box Inside rear view mirror Back door trim	Polypropylene	PP	80 – 120
13 14	Front deck garnish High mounted stop lamp cover	Talc filled Polypropylene	PP – TD (PPF)	110 – 140
15 16 17 18 19 20 21 22	Front pillar trim Center pillar trim, upper Quarter trim Rear pillar trim Front scuff plate Rear floor console Floor console Cowl side trim	10% talc filled Polypropylene	PP – TD10 (PPF)	110 – 120
23	Instrument panel	20% talc filled Polypropylene	PP – TD20 (PPF)	120 – 130
24	Roof moulding	Polyvinyl chloride	PVC	70 – 90
25 26	Front mud guard Rear mud guard	Ethylene vinyl acetate	E/VAC (EVA)	60

NOTES

- (1) The indicated heat-resistance temperature for parts which are composed of two or more types of material is the value for the material with the lowest heat-resistance temperature.
- (2) If the new material symbols designated by the ISO differ from the old symbols, both are given, with the old symbol being enclosed in brackets.
ISO: International Organization for Standardization.
- (3) The material symbols for synthetic-resin parts are embossed on the parts in hidden places.
- (4) A slash (/) in the material symbol indicates that two different materials make 2-layer construction. A plus sign (+) indicates that the two different materials mix each other.

<5 DOOR>

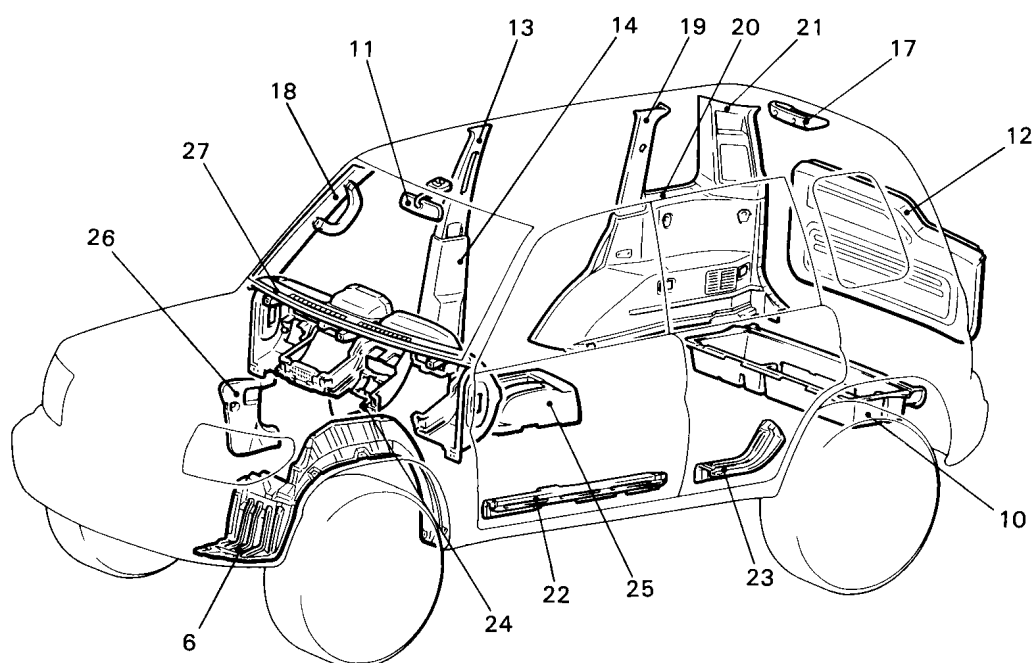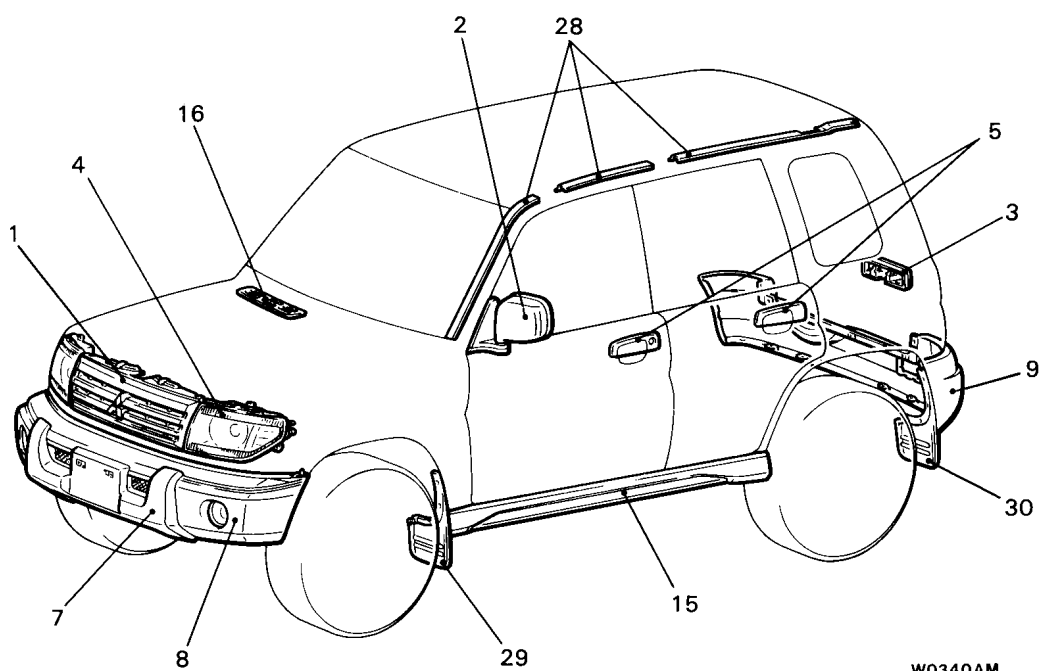

No.	Part name	Name of resin	Abbreviation	Heat-withstand temp. (°C)
1	Radiator grille	Acrylonitrile butadiene styrene	ABS	80 – 110
2	Door mirror	Acrylonitrile styrene acrylate	ASA (AAS)	80 – 100
3	License lamp garnish			
4	Headlamp	Polycarbonate	PC	130 – 140
5	Door outside handle	Polycarbonate + Polyethylene terephthalate	PC + PET	140 – 150
6	Splash shield	Polyethylene	PE	70 – 90
7	Bumper guard	Polypropylene	PP	80 – 120
8	Front bumper face			
9	Rear bumper face			
10	Luggage floor box			
11	Inside rear view mirror			
12	Back door trim			
13	Center pillar upper trim			
14	Center pillar lower trim			
15	Side air dam			
16	Front deck garnish	Talc filled Polypropylene	PP – TD (PPF)	110 – 140
17	High mounted stop lamp cover			
18	Front pillar trim	10% talc filled Polypropylene	PP – TD10 (PPF)	110 – 120
19	Quarter upper trim			
20	Quarter lower trim			
21	Rear pillar trim			
22	Front scuff plate			
23	Rear scuff plate			
24	Floor console			
25	Rear floor console			
26	Cowl side trim			
27	Instrument panel	20% talc filled Polypropylene	PP – TD20 (PPF)	120 – 130
28	Roof moulding	Polyvinyl chloride	PVC	70 – 90
29	Front mud guard	Ethylene vinyl acetate	E/VAC (EVA)	60
30	Rear mud guard			

NOTES

- (1) The indicated heat-resistance temperature for parts which are composed of two or more types of material is the value for the material with the lowest heat-resistance temperature.
- (2) If the new material symbols designated by the ISO differ from the old symbols, both are given, with the old symbol being enclosed in brackets.
ISO: International Organization for Standardization.
- (3) The material symbols for synthetic-resin parts are embossed on the parts in hidden places.
- (4) A slash (/) in the material symbol indicates that two different materials make 2-layer construction.
A plus sign (+) indicates that the two different materials mix each other.