

SECTION : 9M

EXTERIOR TRIM

TABLE OF CONTENTS

SPECIFICATIONS	9M-1	Mud Guards	9M-3
Fastener Tightening Specifications	9M-1	Hatchback Rear Spoiler	9M-3
MAINTENANCE AND REPAIR	9M-2	GENERAL DESCRIPTION AND SYSTEM	
ON-VEHICLE SERVICE	9M-2	OPERATION	9M-5
B-Pillar Molding	9M-2	Emblems and Lettering	9M-5
Roof Molding	9M-2	Mud Guards	9M-5


SPECIFICATIONS

FASTENER TIGHTENING SPECIFICATIONS

Application	N•m	Lb-Ft	Lb-In
B-Pillar Molding Screws	1.3	–	12
Mud Guard Bolts	2	–	18

MAINTENANCE AND REPAIR


ON-VEHICLE SERVICE

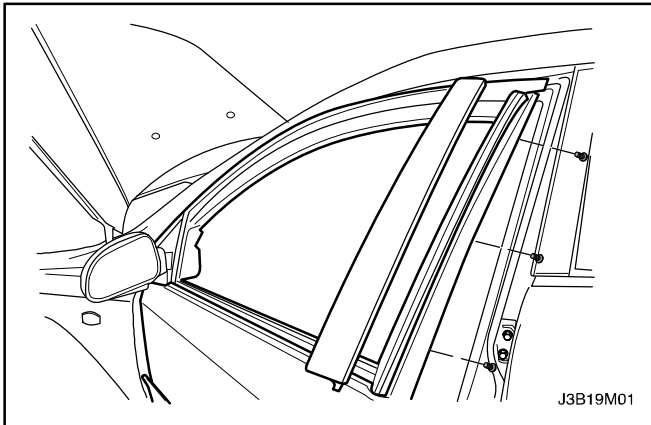

B-PILLAR MOLDING

Removal Procedure

1. Remove the outside channel molding. Refer to Section 9P, Doors.
2. Reposition the weatherstrip in order to access the screws.
3. Remove the screws and the B-pillar molding (front door B-pillar molding shown, rear door C-pillar molding similar).

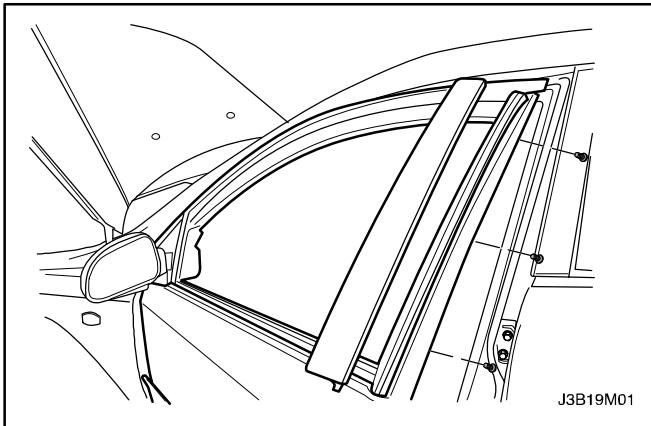

Installation Procedure


Notice : Dissimilar metals in direct contact with each other may corrode rapidly. Make sure to use the correct fasteners to prevent premature corrosion.

1. Install the screws and the B-pillar molding (front door B-pillar molding shown, rear door C-pillar molding similar).

Tighten

Tighten the B-pillar molding screws to 1.3 N•m 12 (lb-in).


2. Install the weatherstrip to its original position.
3. Install the outside channel molding. Refer to Section 9P, Doors.

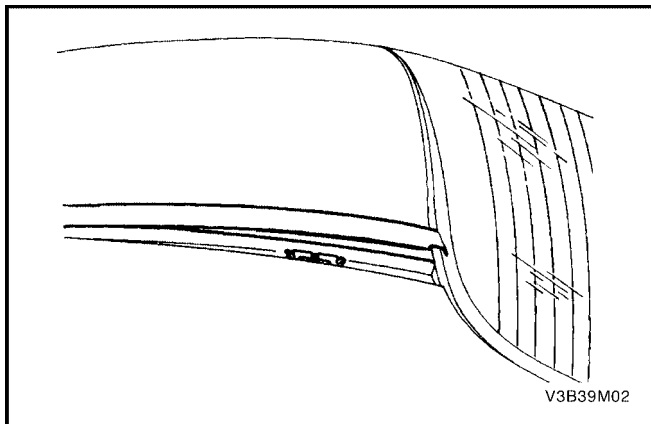

ROOF MOLDING


Removal Procedure

1. Remove the roof molding from the metal clips.

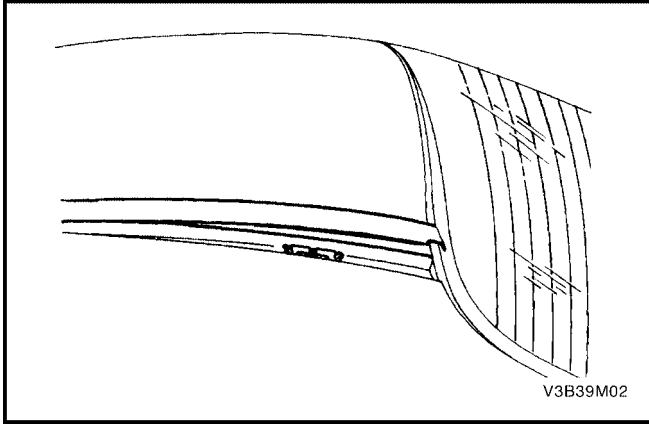

Installation Procedure


1. Press the roof molding onto the metal clips.

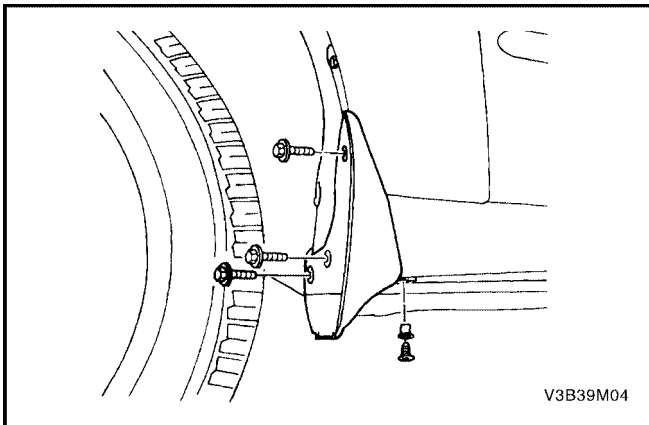

MUD GUARDS

Removal Procedure

1. Remove the screw and the bolts and the mud guard.

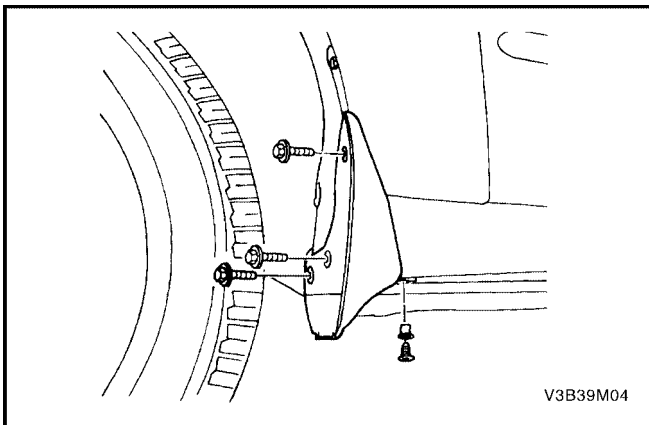


Installation Procedure

Notice : Dissimilar metals in direct contact with each other may corrode rapidly. Make sure to use the correct fasteners to prevent premature corrosion.

1. Install the mud guard with the bolts and the screw.

Tighten


Tighten the mud guard bolts to 2 N•m (18 lb-in).

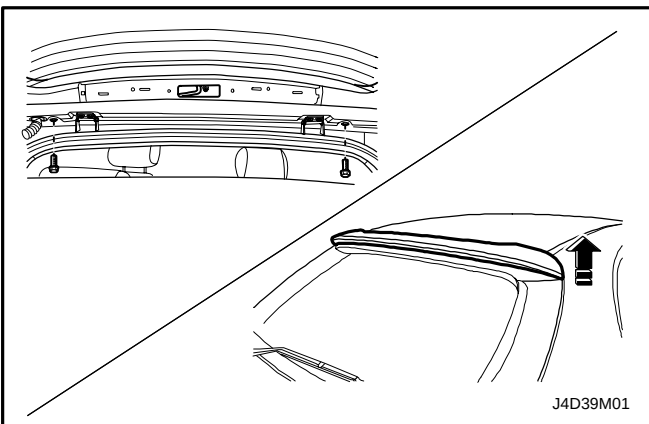

HATCHBACK REAR SPOILER

Removal Procedure

1. Open the tailgate.
2. Remove the Hatchback Door upper Garnish molding.
3. Remove the rear spoiler from the tailgate.

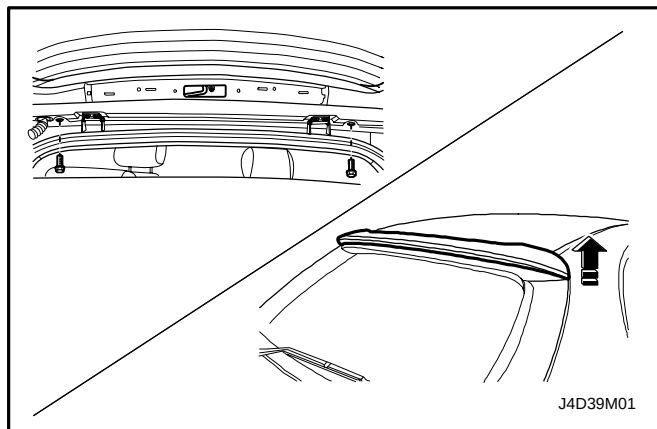

Installation Procedure

1. Install the rear spoiler on the tailgate with the nuts.

GENERAL DESCRIPTION AND SYSTEM OPERATION

EMBLEMS AND LETTERING

The emblems and lettering on the vehicle are attached by adhesive. The company emblem appears on the hood. The lettering, which appears in several places on the body of the vehicle, features the model, the grade, and the company name.

MUD GUARDS

Front and rear mud guards are standard equipment on all models. Mud guards will help prevent an excessive build-up of mud on the body.