IGNITION SYSTEM

CONTENTS

page

SPECIFICATIONS
IGNITION COIL 1

page

TORQUE SPECIFICATION 1

SPECIFICATIONS

TORQUE SPECIFICATION

DESCRIPTION	TORQUE
Camshaft Position Sensor Screw	9 N·m (80 in. lbs.)
SOHC Cam Magnet/Target	3.6 N·m (32 in. lbs.)
DOHC Cam Magnet/Target	3.6 N·m (32 in. lbs.)
Crankshaft Position Sensor Screw	9 N·m (80 in. lbs.)
Coolant Temp. Sensor	18.6 N·m (165 in. lbs.)
Ignition Coil to Cyl. Head	11.9 N·m (105 in. lbs.)
Knock Sensor	10 N·m (90 in. lbs.)
MAP/IAT Sensor Plastic Manifold	2 N·m (20 in. lbs.)
MAP/IAT Sensor Aluminum Manifold	3 N·m (30 in. lbs.)
Spark Plugs	28 N·m (20 ft. lbs.)
Throttle Position Sensor	2 N·m (20 in. lbs.)

IGNITION COIL

Coil Manufacture	Primary Resistance at 21°C-27°C (70°F-80°F)	Secondary Resistance at 21°C-27°C (70°F-80°F)
Weastec (Steel Towers)	0.45 to 0.65 Ohms	11,000 to 14,000 Ohms

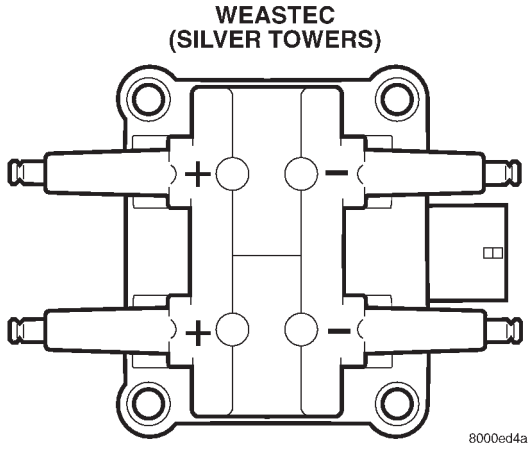

Coil Polarity