

GROUP 15

INTAKE AND EXHAUST


GENERAL

OUTLINE OF CHANGE

Due to the introduction of the oxygen sensor (rear), the following service procedure has been added. The other service procedures are the same as before.

EXHAUST PIPE AND MAIN MUFFLER

REMOVAL AND INSTALLATION

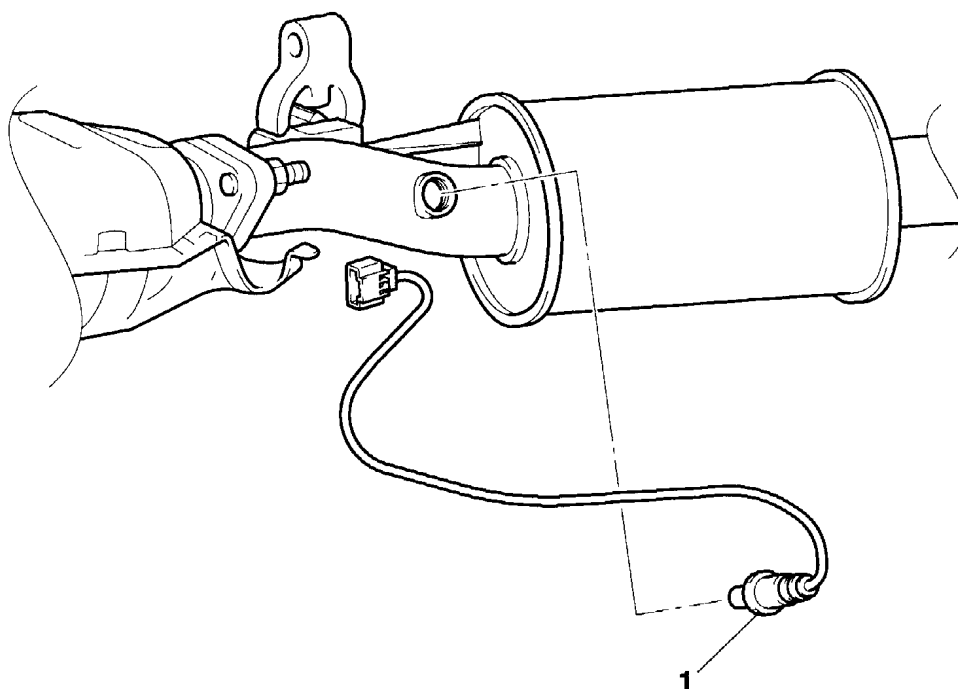


AY0211AL

Removal step



1. Oxygen sensor (rear)

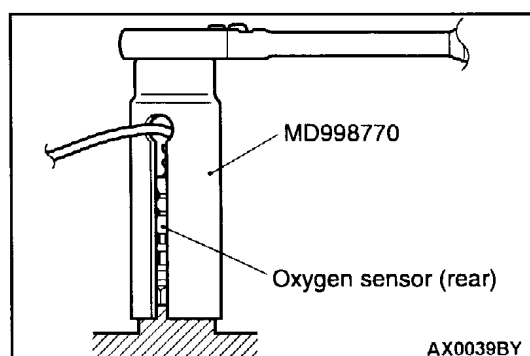

REMOVAL SERVICE POINT

◀A▶ OXYGEN SENSOR (REAR) REMOVAL