

GROUP 51

EXTERIOR



GENERAL

OUTLINE OF CHANGES

- Due to the introduction of 5-door models, the rear bumper service procedure has been added.
- Due to the introduction of 5-door models, the service procedures for the roof drip moulding and the side protector moulding have been added.
- Due to the change on the front deck garnish, the service procedure has been changed.
- The side protector moulding for 5-door models has a "Pininfarina" mark and "Pininfarina" logo mark. Due to this, the service procedure has been established.
- Due to the change on the GDI mark, the service procedure has been changed.

REAR BUMPER

DISASSEMBLY AND REASSEMBLY

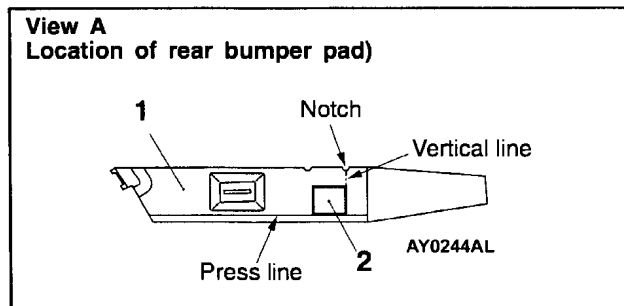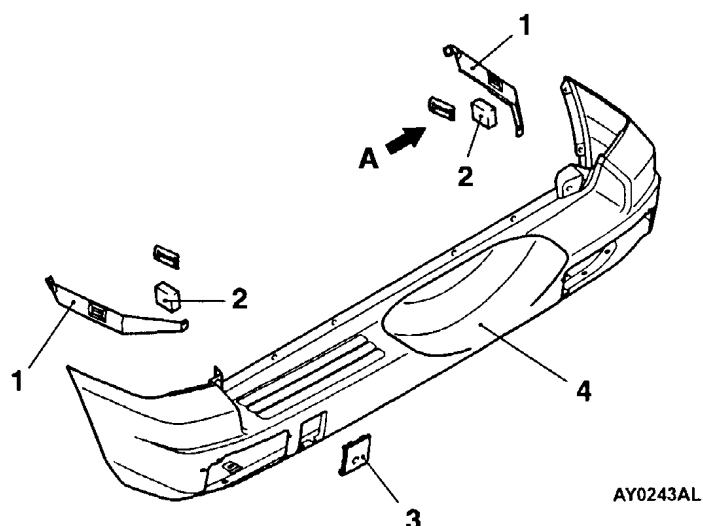




Disassembly steps

- Rear combination lamp assembly and rear combination lamp assembly bracket <R.H. drive vehicles>
- Rear fog assembly and rear fog assembly bracket <L.H. drive vehicles>

1. Rear bumper face side bracket
2. Rear bumper pad
3. Rear bumper cover
4. Rear bumper face

MOULDING

REMOVAL AND INSTALLATION

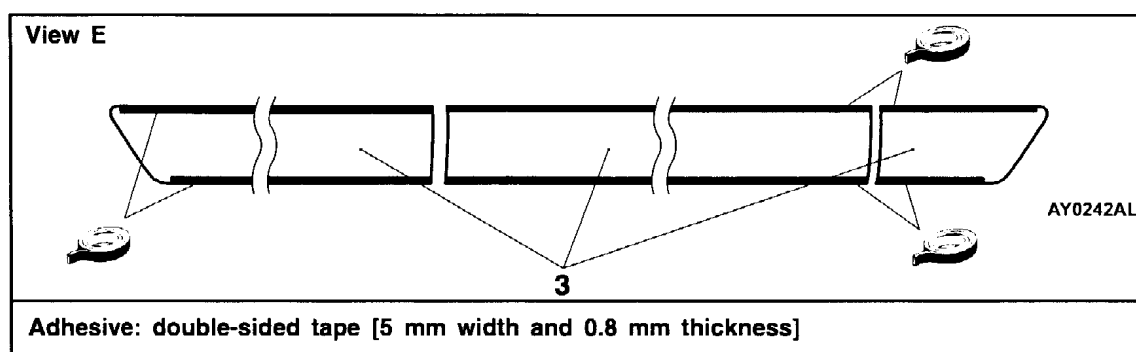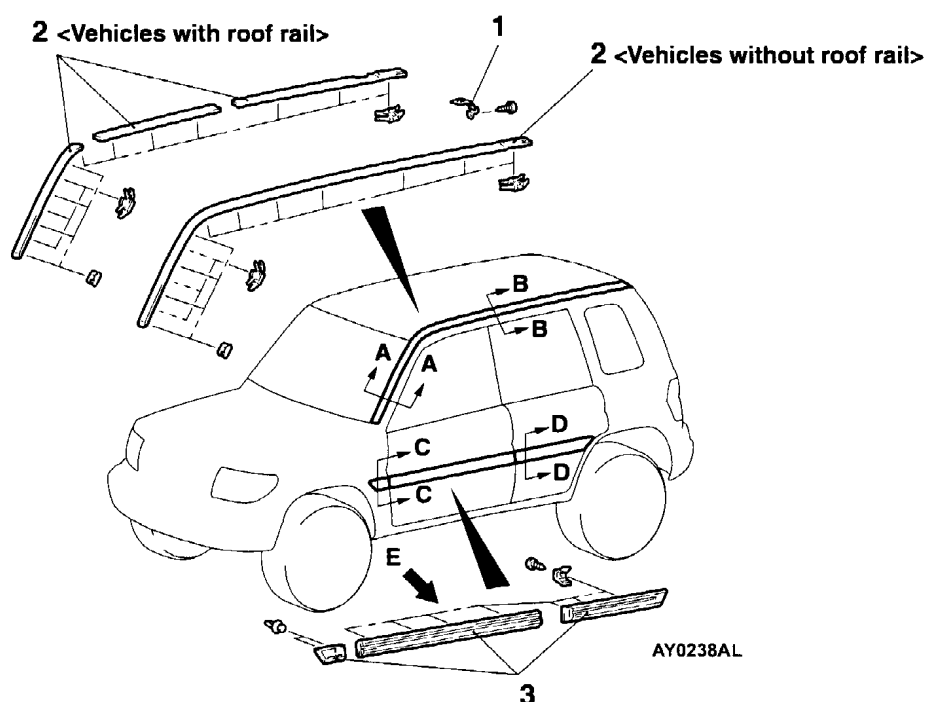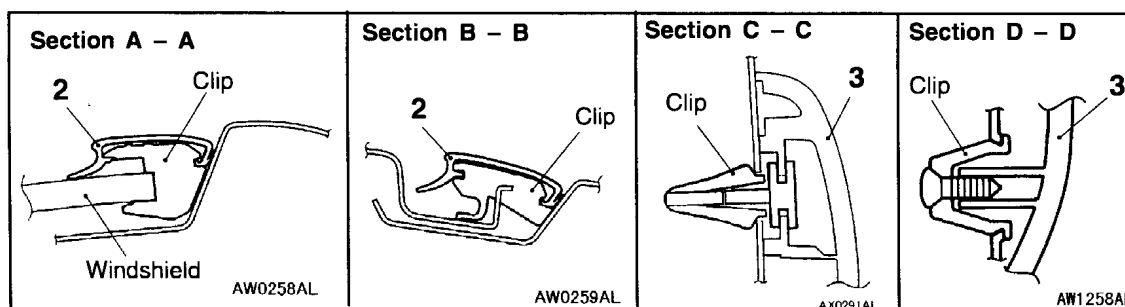

Roof drip moulding removal steps

- Roof rail assembly
- 1. Roof drip cover
- 2. Roof drip moulding

Side protector moulding removal



- 3. Side protector moulding

NOTE

For the removal and installation service points of the roof drip moulding and the side protector moulding, refer to the Basic Manual.

◀A▶

◀B▶ ▶A▶

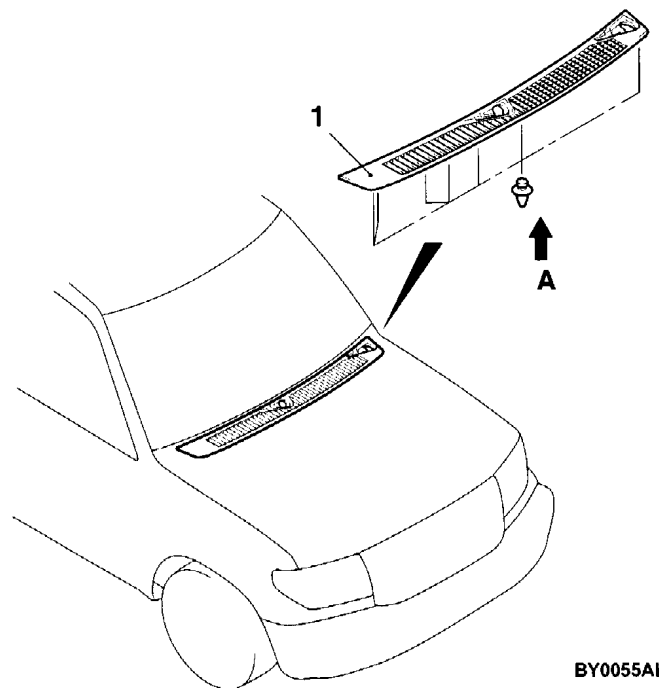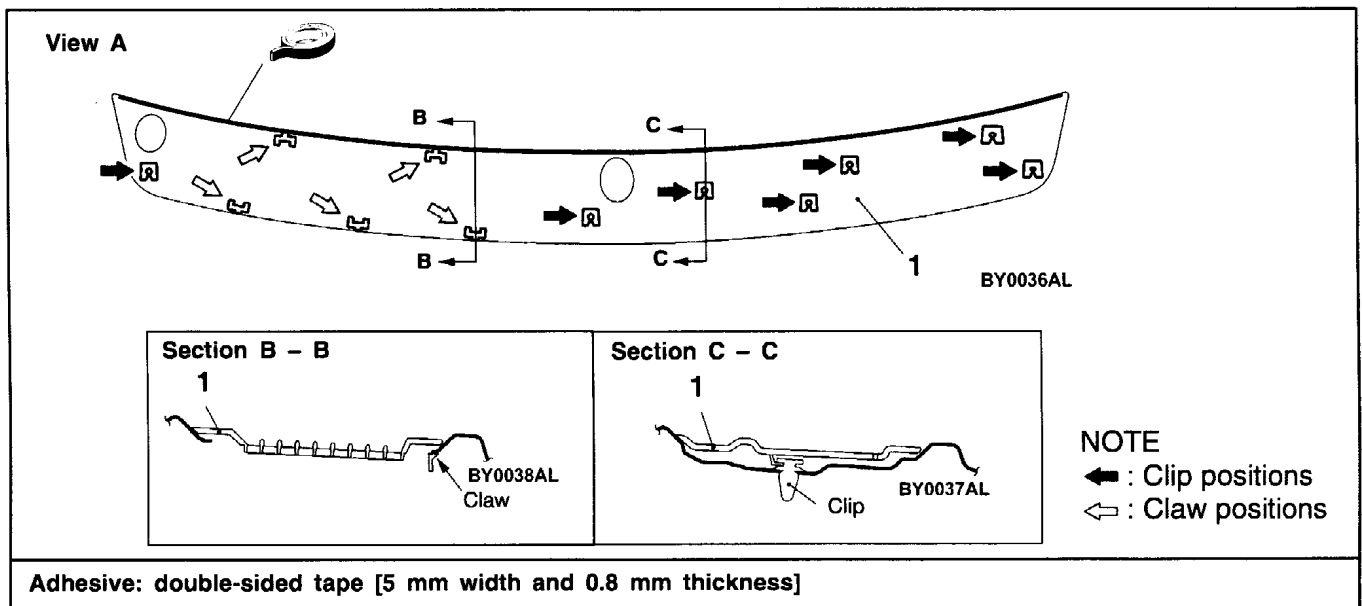
GARNISH**REMOVAL AND INSTALLATION****Front deck garnish removal steps**

- Wiper arm and blade assembly
- 1. Front deck garnish

NOTE

For the removal and installation service points of the side protector moulding, refer to the Basic Manual.

◀A▶ ▶A◀

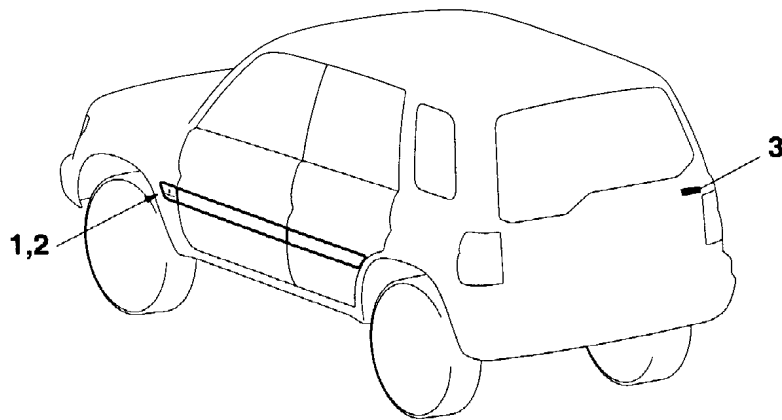MARKS**REMOVAL AND INSTALLATION**


AY0239AL

- ▶A◀ 1. Pininfarina mark
 ▶A◀ 2. Pininfarina logo mark

- ▶A◀ 3. GDI mark


INSTALLATION SERVICE POINT**▶A◀ MARK INSTALLATION**

(1) PININFARINA MARK,(2) PININFARINA LOGO MARK

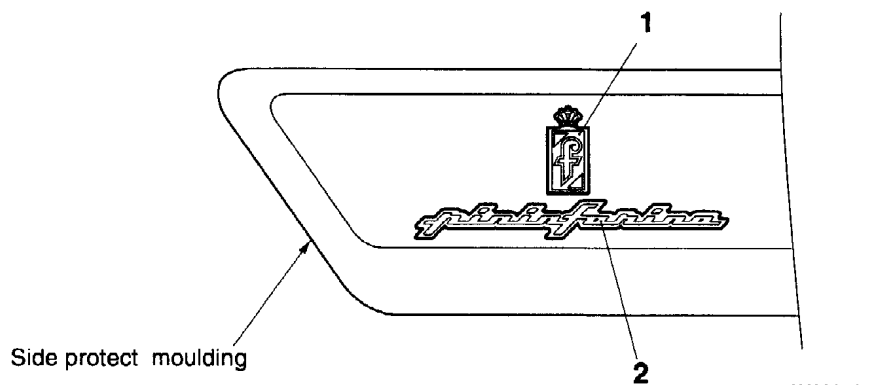

AY0237AL

(3) GDI MARK

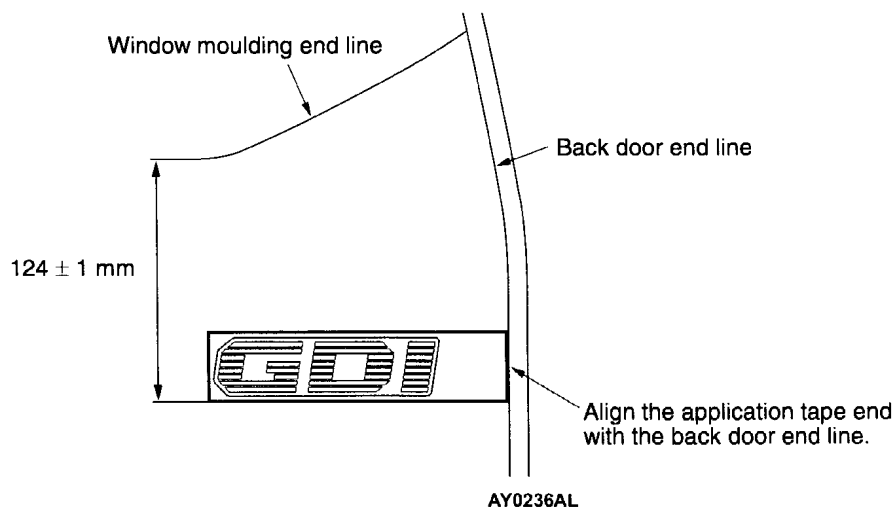

1. Clean the mark installation surfaces on the body with unleaded petrol.
2. Peel off the backing paper from the reverse side of the marks, and then attach the marks to the vehicle body so that they fit properly into position.

Caution

When attaching the marks, the surrounding temperature should be 20 – 38°C and the air should be completely free from dust.

If the surrounding temperature is lower than 20°C, the marks and the places on the body where the marks are to be attached should be heated to 20 – 38°C.