



5 SYNTHETIC-RESIN PARTS

LOCATION OF SYNTHETIC-RESIN PARTS 5-2

LOCATION OF SYNTHETIC-RESIN PARTS

The location and material of each of the principal synthetic-resin parts are shown below.

<SPACE RUNNER>

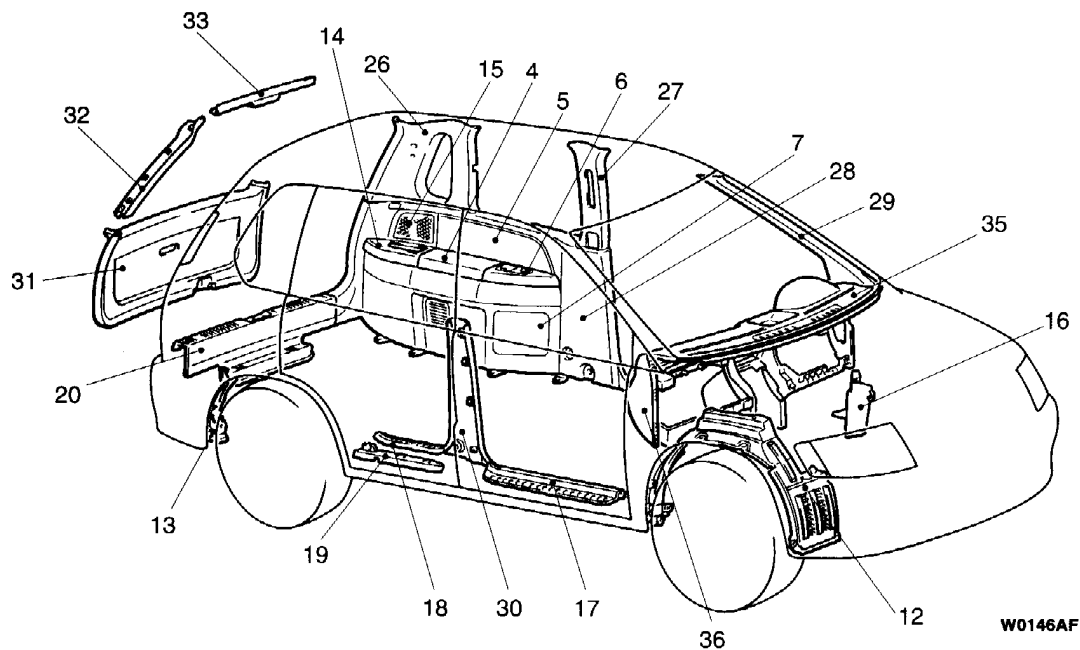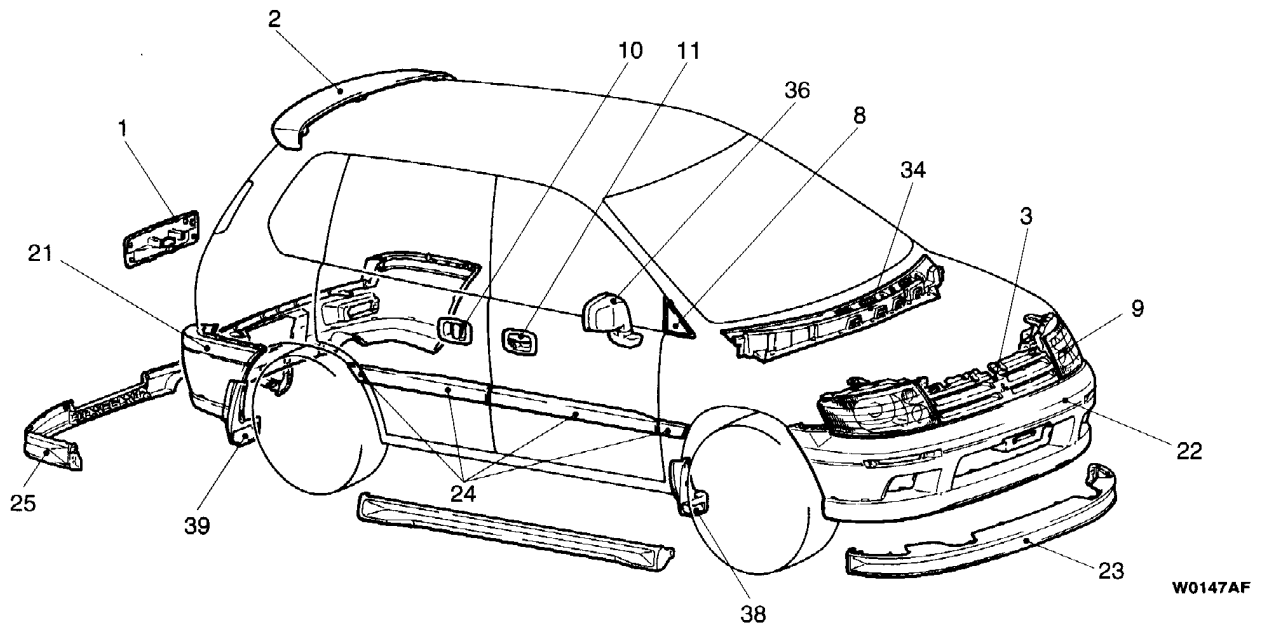



No.	Part name	Name of resin	Abbreviation	Heat-withstand. temp (°C)
1	Tailgate garnish	Acrylonitrile-butadiene-styrene	ABS	80 – 110
2	Tailgate deflector			
3	Radiator grille			
4	Box lid			
5	Cross ornament			
6	Front cover			
7	Secret box lid			
8	Delta outer garnish	Acrylonitrile-styrene acrylate	ASA (AAS)	80 – 100

No.	Part name	Name of resin	Abbreviation	Heat-withstand. temp (°C)
9	Headlamp	Polycarbonate	PC	130 – 140
10	Rear door outside handle	Polycarbonate + Polyethylene terephthalate	PC + PET	140 – 150
11	Front door outside handle			
12	Splash shield, rear	Polyethylene	PE	70 – 90
13	Splash shield, front			
14	Suspension lid	Polypropylene	PP	80 – 120
15	Speaker garnish			
16	Cowl side trim			
17	Front scuff plate			
18	Rear scuff plate			
19	Slide rail cover			
20	Rear end trim			
21	Rear bumper face	Rubber with talc Denatured polypropylene	PP + E/ P-TD (HMPP)	80 – 90
22	Front bumper face			
23	Front air dam	Polypropylene with talc	PP-TD (PPF)	110 – 140
24	Side protector moulding			
25	Rear air dam			
26	Rear pillar trim	Polypropylene with 10% talc	PP-TD10 (PPF)	110 – 120
27	Center pillar trim, upper			
28	Quarter trim, lower			
29	Front pillar trim			
30	Center pillar trim, lower			
31	Tailgate trim, lower	Polypropylene with 15% talc	PP-TD15 (PPF)	110 – 120
32	Tailgate trim, side			
33	Tailgate trim upper			
34	Front deck garnish	Polypropylene with 20% talc	PP-TD20 (PPF)	120 – 130
35	Instrument panel			
36	Instrument panel side cover			
37	Door mirror	Acrylonitrile-styrene	SAN (AAS)	80 – 100
38	Front mudguard	Thermoplastic elastomer (olefin type)	TPO	80
39	Rear mudguard			

NOTES

- (1) The indicated heat-resistance temperature for parts which are composed of two or more types of more of material is the value for the material with the lowest heat-resistance temperature.
- (2) If the new material symbols designated by the ISO differ from the old symbols, both are given, with the old symbol being enclosed in brackets.
ISO : International Organization for Standardization
- (3) The material symbols for synthetic resin parts are embossed on the parts in hidden places.
- (4) A slash (/) in the materials symbol indicates that two different materials make 2-layer construction.
A plus sign (+) indicates that the two different materials mix each other.

<SPACE WAGON>

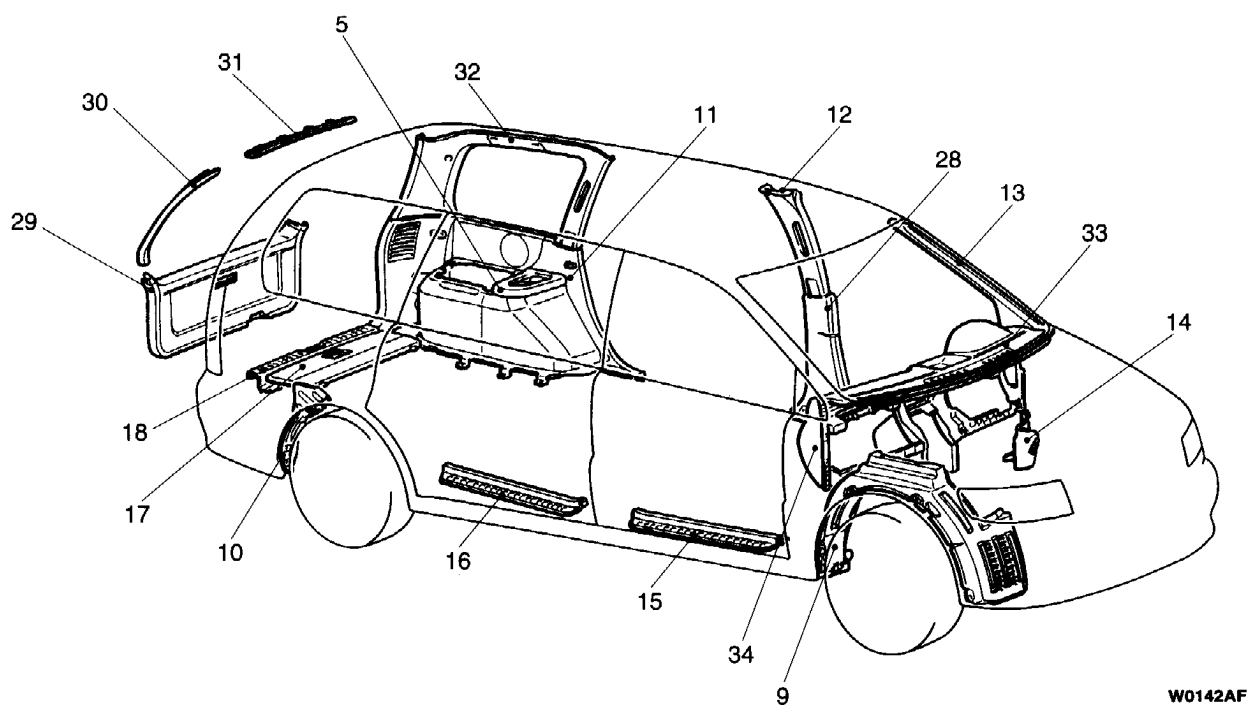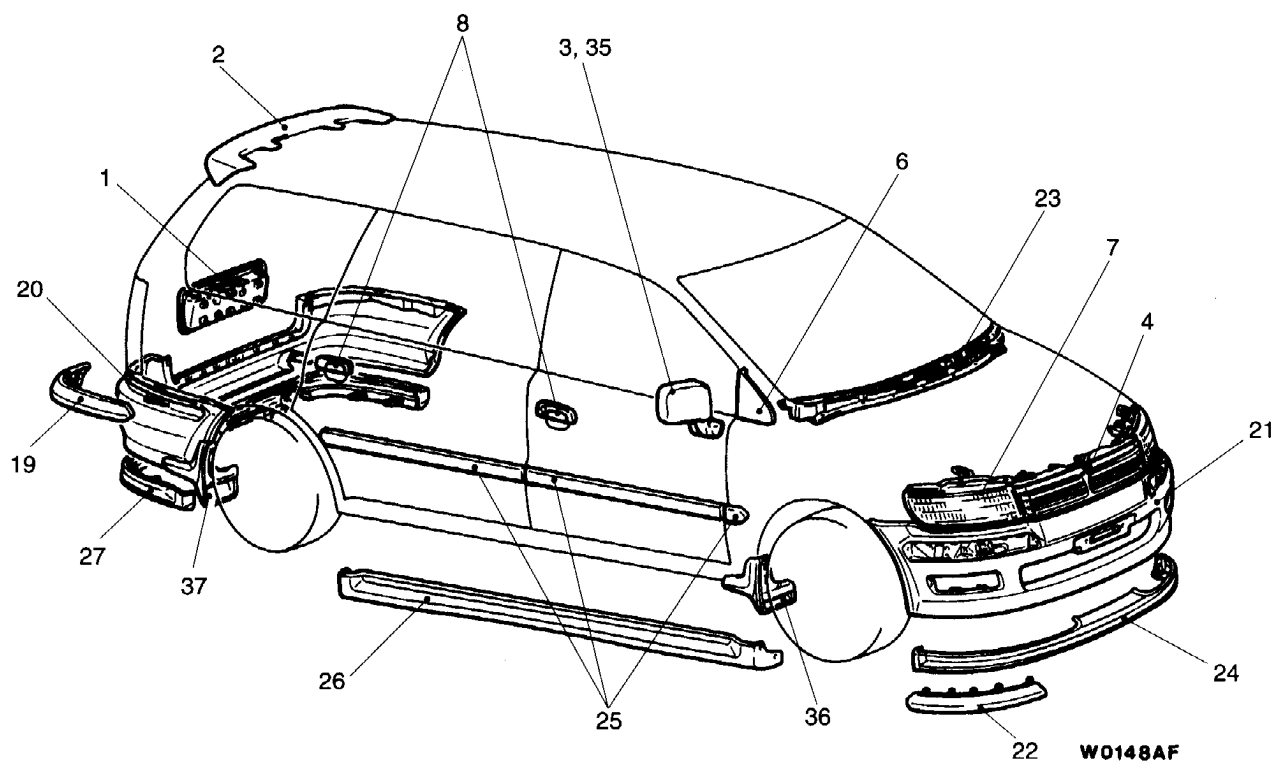

No.	Part name	Name of resin	Abbreviation	Heat-withstand. temp (°C)
1 2 3 4 5	License lamp garnish Tailgate deflector Door mirror (body colour) Radiator grille Quarter trim, lower, upper	Acrylonitrile-butadiene	ABS	80 – 110
6	Delta outer garnish	Acrylonitrile-styrene acrylate	ASA (AAS)	80 – 100
7	Headlamp	Polycarbonate	PC	130 – 140
8	Door outside handle	Polycarbonate + Polyethylene terephthalate	PC + PET	140 – 150
9 10	Splash shield, front Splash shield, rear	Polyethylene	PE	70 – 90
11 12 13 14 15 16 17 18	Quarter trim, lower Center pillar trim, upper Front pillar trim Cowl side trim Front scuff plate Rear scuff plate Luggage floor box lid Rear end trim	Polypropylene	PP	80 – 120
19 20 21 22	Corner protector Rear bumper face Front bumper face Front bumper protector moulding	Rubber with talc Denatured polypropylene	PP + E/ P-TD (HMPP)	80 – 90
23 24 25 26 27	Front deck garnish Front air dam Side protector moulding Side air dam Rear air dam	Polypropylene with talc	PP-TD (PPF)	110 – 140
28	Center pillar trim, lower	Polypropylene with 10% talc	PP-TD10 (PPF)	110 – 120
29 30 31 32	Tailgate trim, lower Tailgate trim, side Tailgate trim, upper Quarter trim, upper	Polypropylene with 15% talc	PP-TD15 (PPF)	110 – 120
33 34	Instrument panel Instrument panel side cover	Polypropylene with 20% talc	PP-TD20 (PPF)	120 – 130
35	Door mirror (black)	Acrylonitrile-styrene	SAN (AAS)	80 – 100
36 37	Front mudguard Rear mudguard	Thermoplastic elastomer (olefin type)	TPO	80

NOTES

- (1) The indicated heat-resistance temperature for parts which are composed of two or more types of material is the value for the material with the lowest heat-resistance temperature.
- (2) If the new material symbols designated by the ISO differ from the old symbols, both are given, with the old symbol being enclosed in brackets.
ISO : International Organization for Standardization
- (3) The material symbols for synthetic resin parts are embossed on the parts in hidden places.
- (4) A slash (/) in the materials symbol indicates that two different materials make 2-layer construction.
A plus sign (+) indicates that the two different materials mix each other.