

SECTION 501-08 Exterior Trim and Ornamentation

VEHICLE APPLICATION: 2011.00 Focus

CONTENTS	PAGE
REMOVAL AND INSTALLATION	
Rear Spoiler — 2.5L Duratec-ST (VI5).....	501-08-2
Rocker Panel Moulding.....	501-08-3

REMOVAL AND INSTALLATION

Rear Spoiler — 2.5L Duratec-ST (VI5)


Removal

1. Raise the liftgate.
2. Remove the liftgate upper trim panel.




3. Detach the rear spoiler from the liftgate.

1. Remove the rear spoiler retaining clips.
2. Remove the rear spoiler retaining screws.

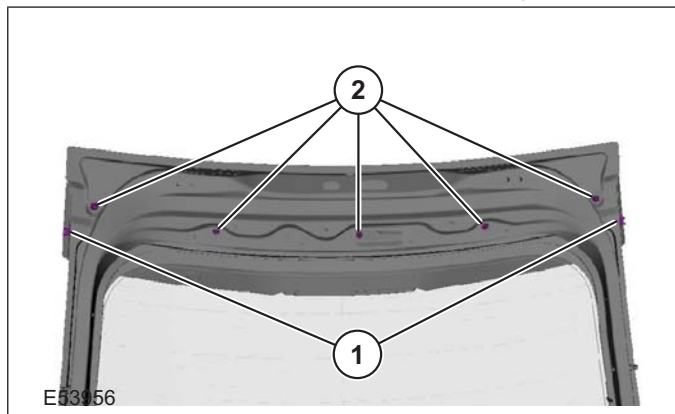


4. Lower the liftgate.
5. Detach the liftgate glass washer nozzle hose from the rear spoiler.

- Disconnect the liftgate glass washer nozzle hose from the washer nozzle.

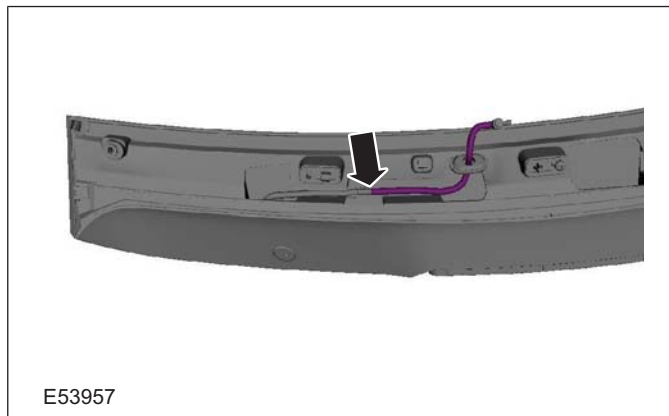

6. Remove the rear spoiler.

- Disconnect the high mounted stoplamp electrical connector.

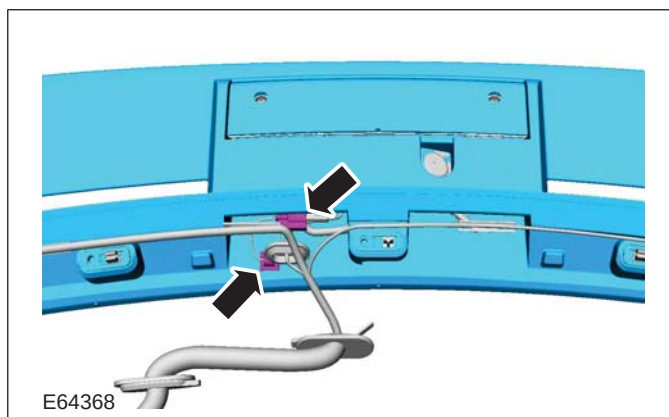

Installation

1. To Install, reverse the removal procedure.

REMOVAL AND INSTALLATION

Rocker Panel Moulding


Removal

1. **Refer to: Health and Safety Precautions** (100-00 General Information, Description and Operation).

Refer to: Specifications (501-25 Body Repairs - General Information, Specifications).


Refer to: Lifting (100-02 Jacking and Lifting, Description and Operation).

2.

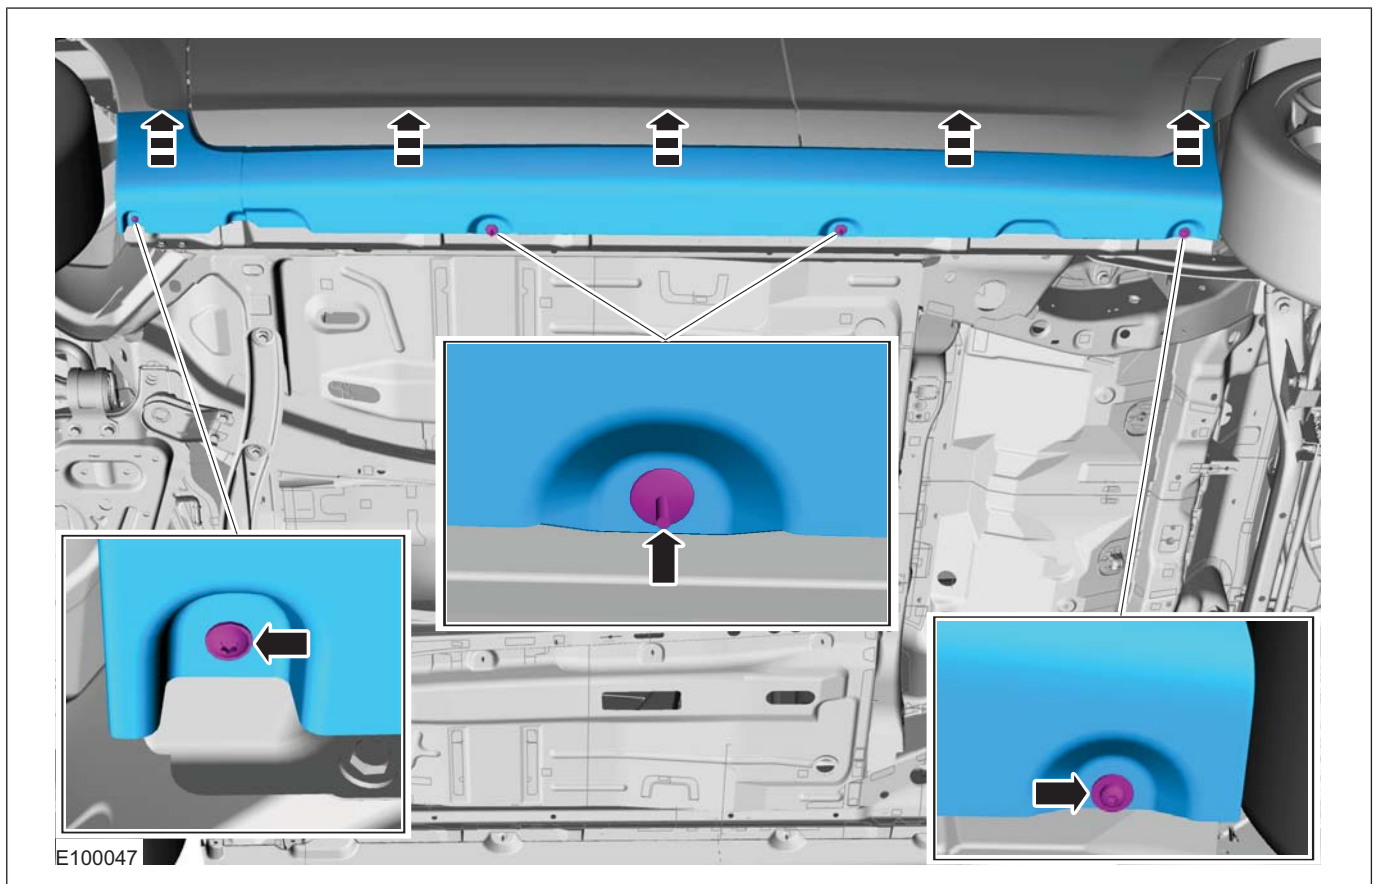


3.

REMOVAL AND INSTALLATION

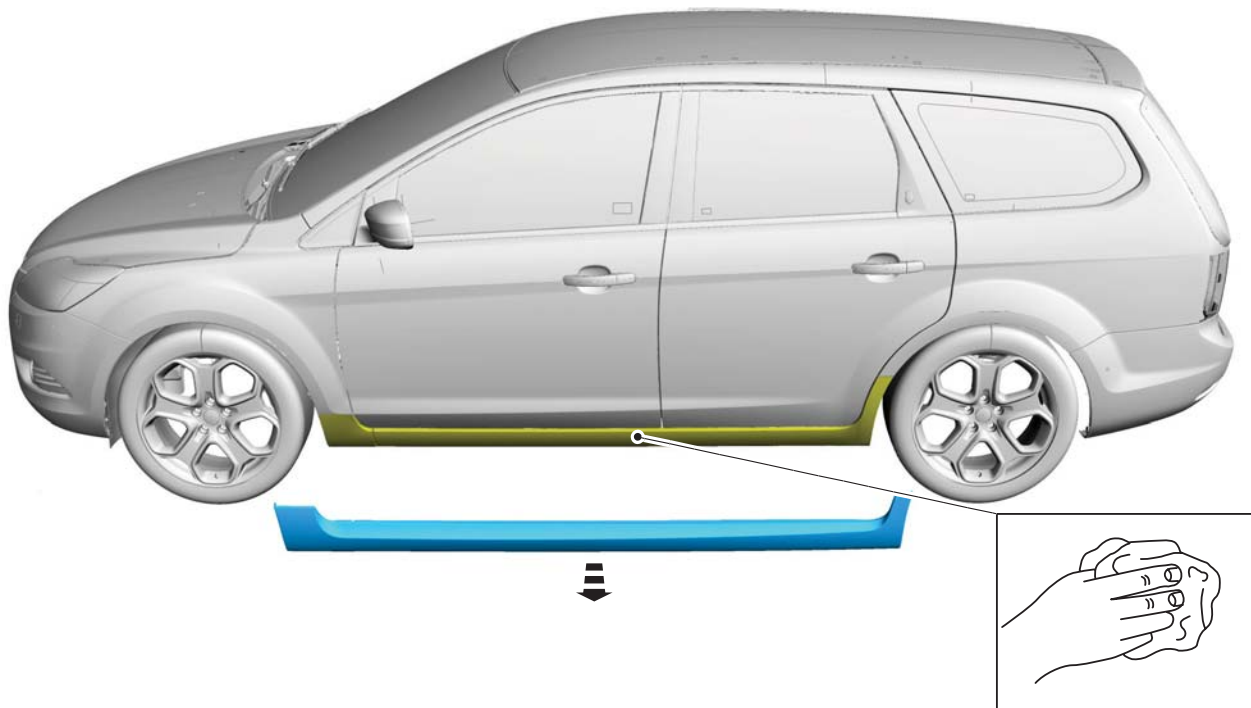

E100015

4.

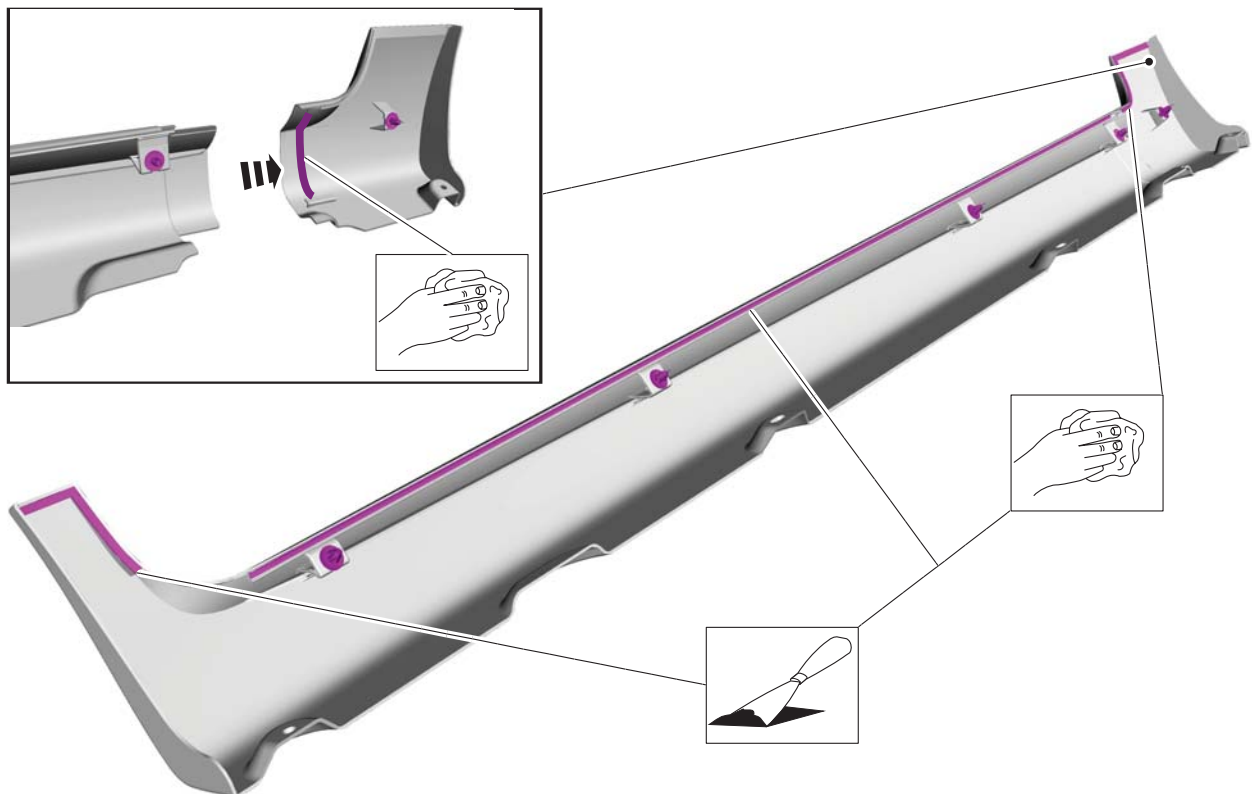


E100048

REMOVAL AND INSTALLATION


Installation

1.

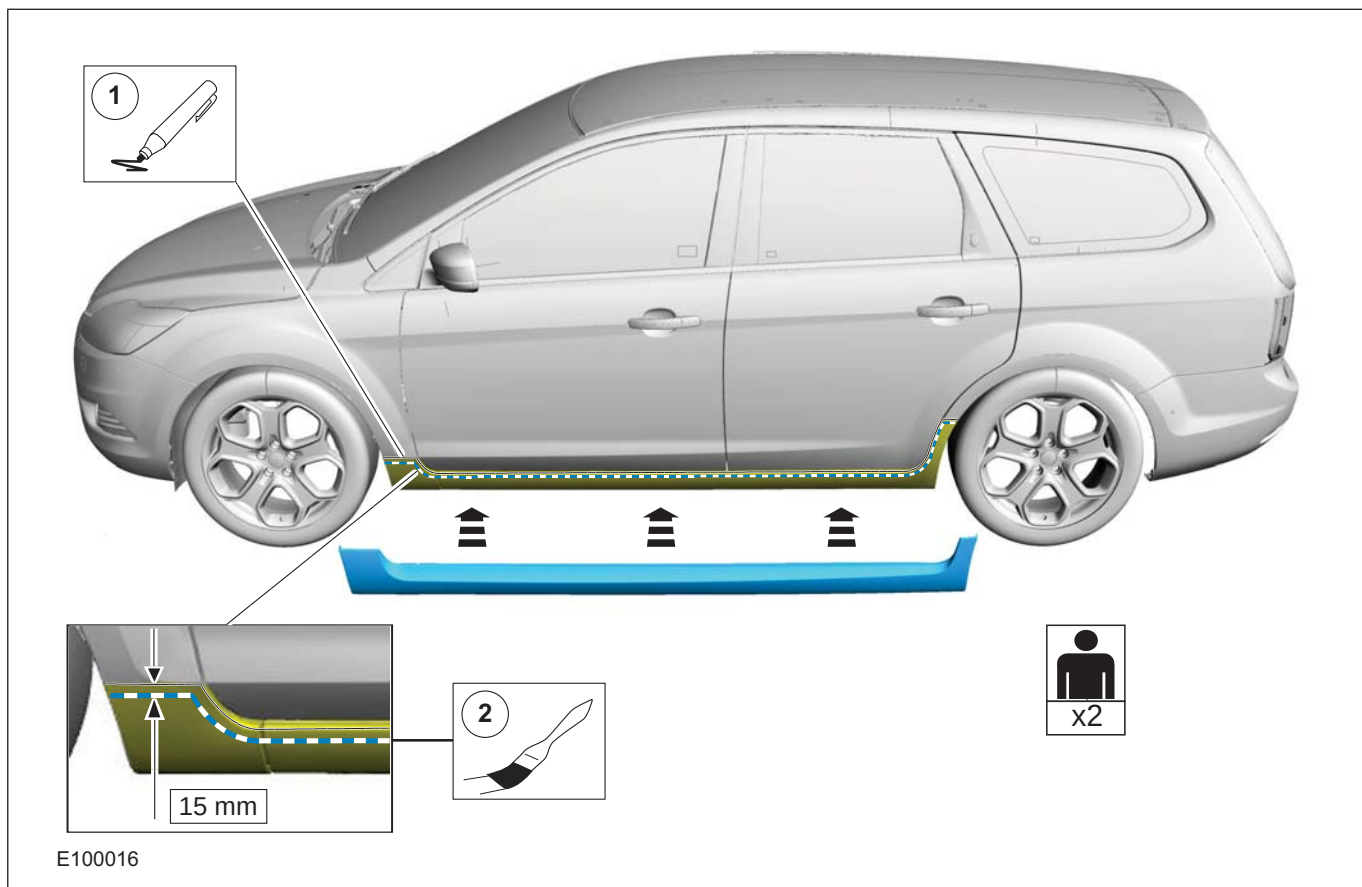


2. 1. If a service fender without fixing hole is fitted.
2. If a service rocker without fixing holes is fitted.

REMOVAL AND INSTALLATION

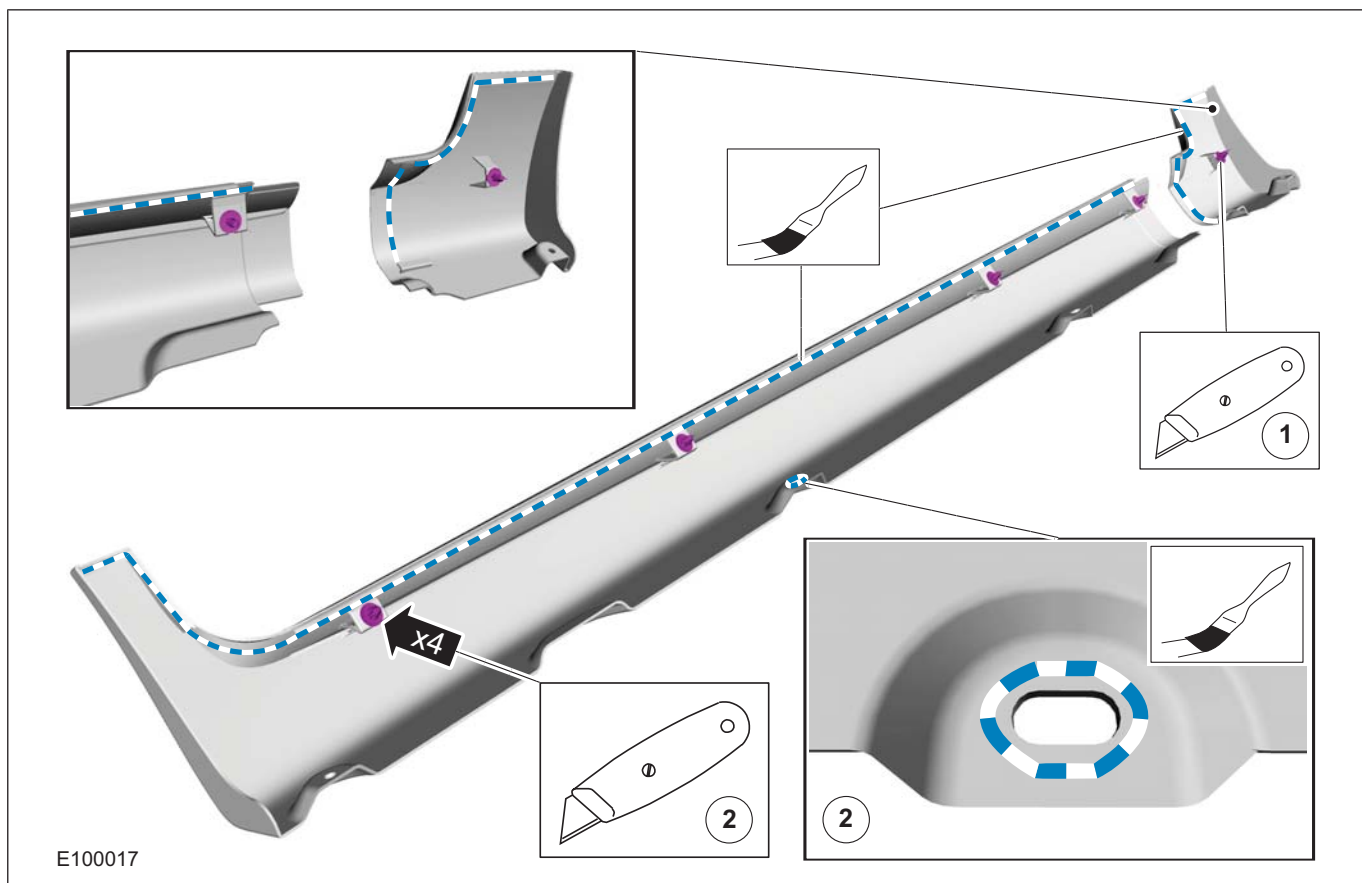


3. 1. If a service rocker without fixing holes is fitted.

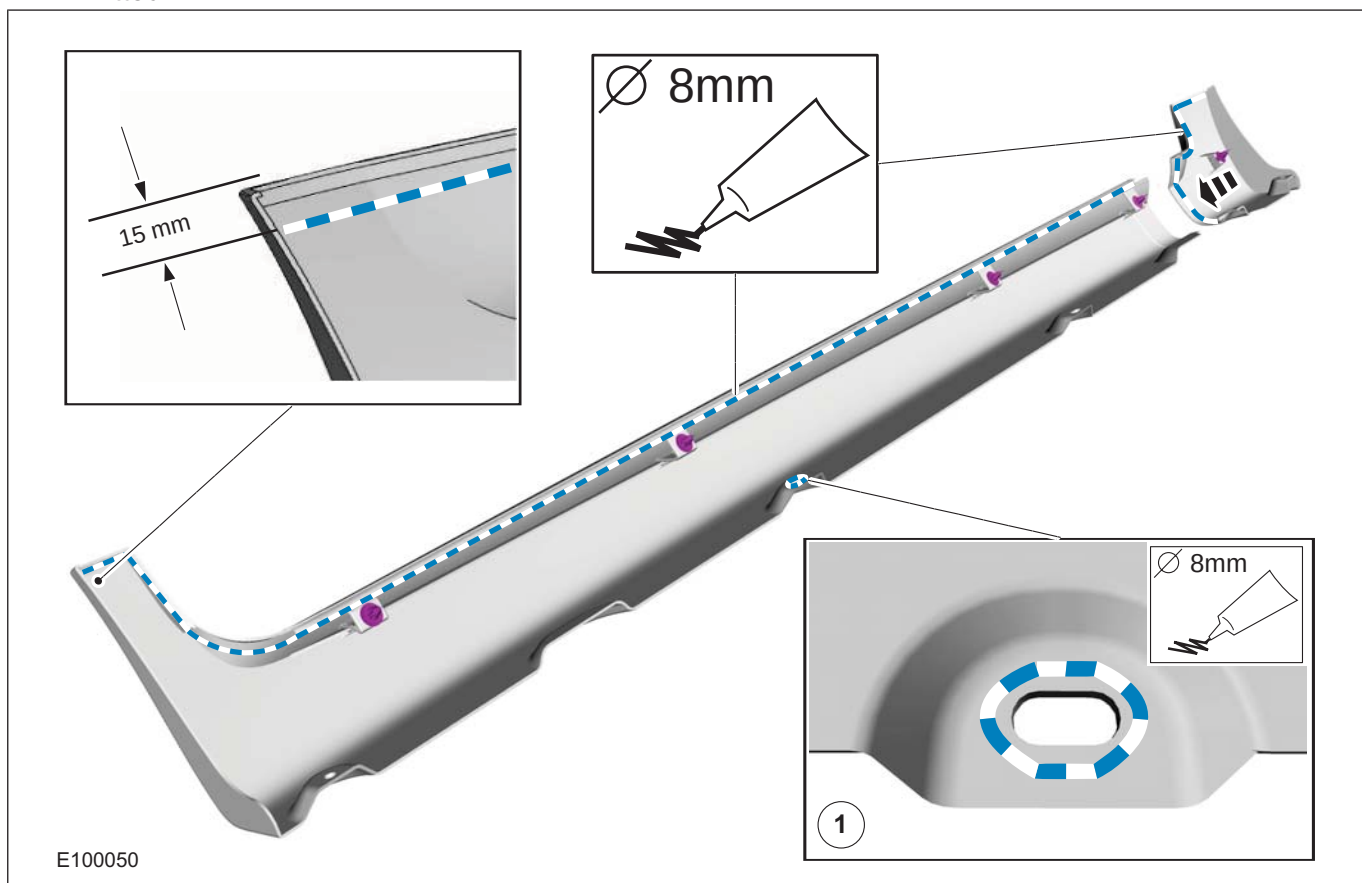

REMOVAL AND INSTALLATION

4. If a service rocker without fixing holes is fitted.

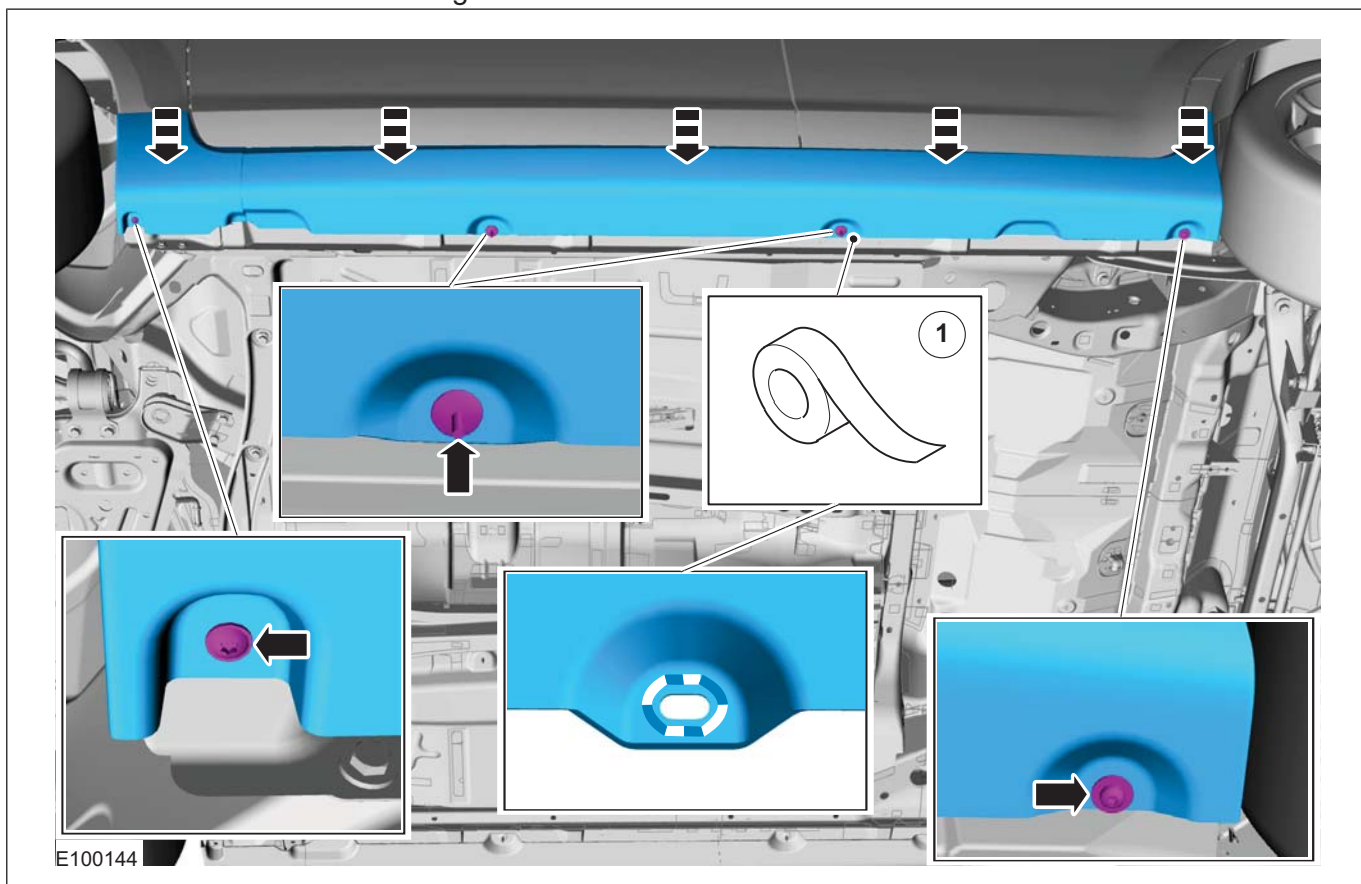

5. Observe a speed limit of 100 km/h for 12 hours. 6. Do not wash the car within 48 hours.

