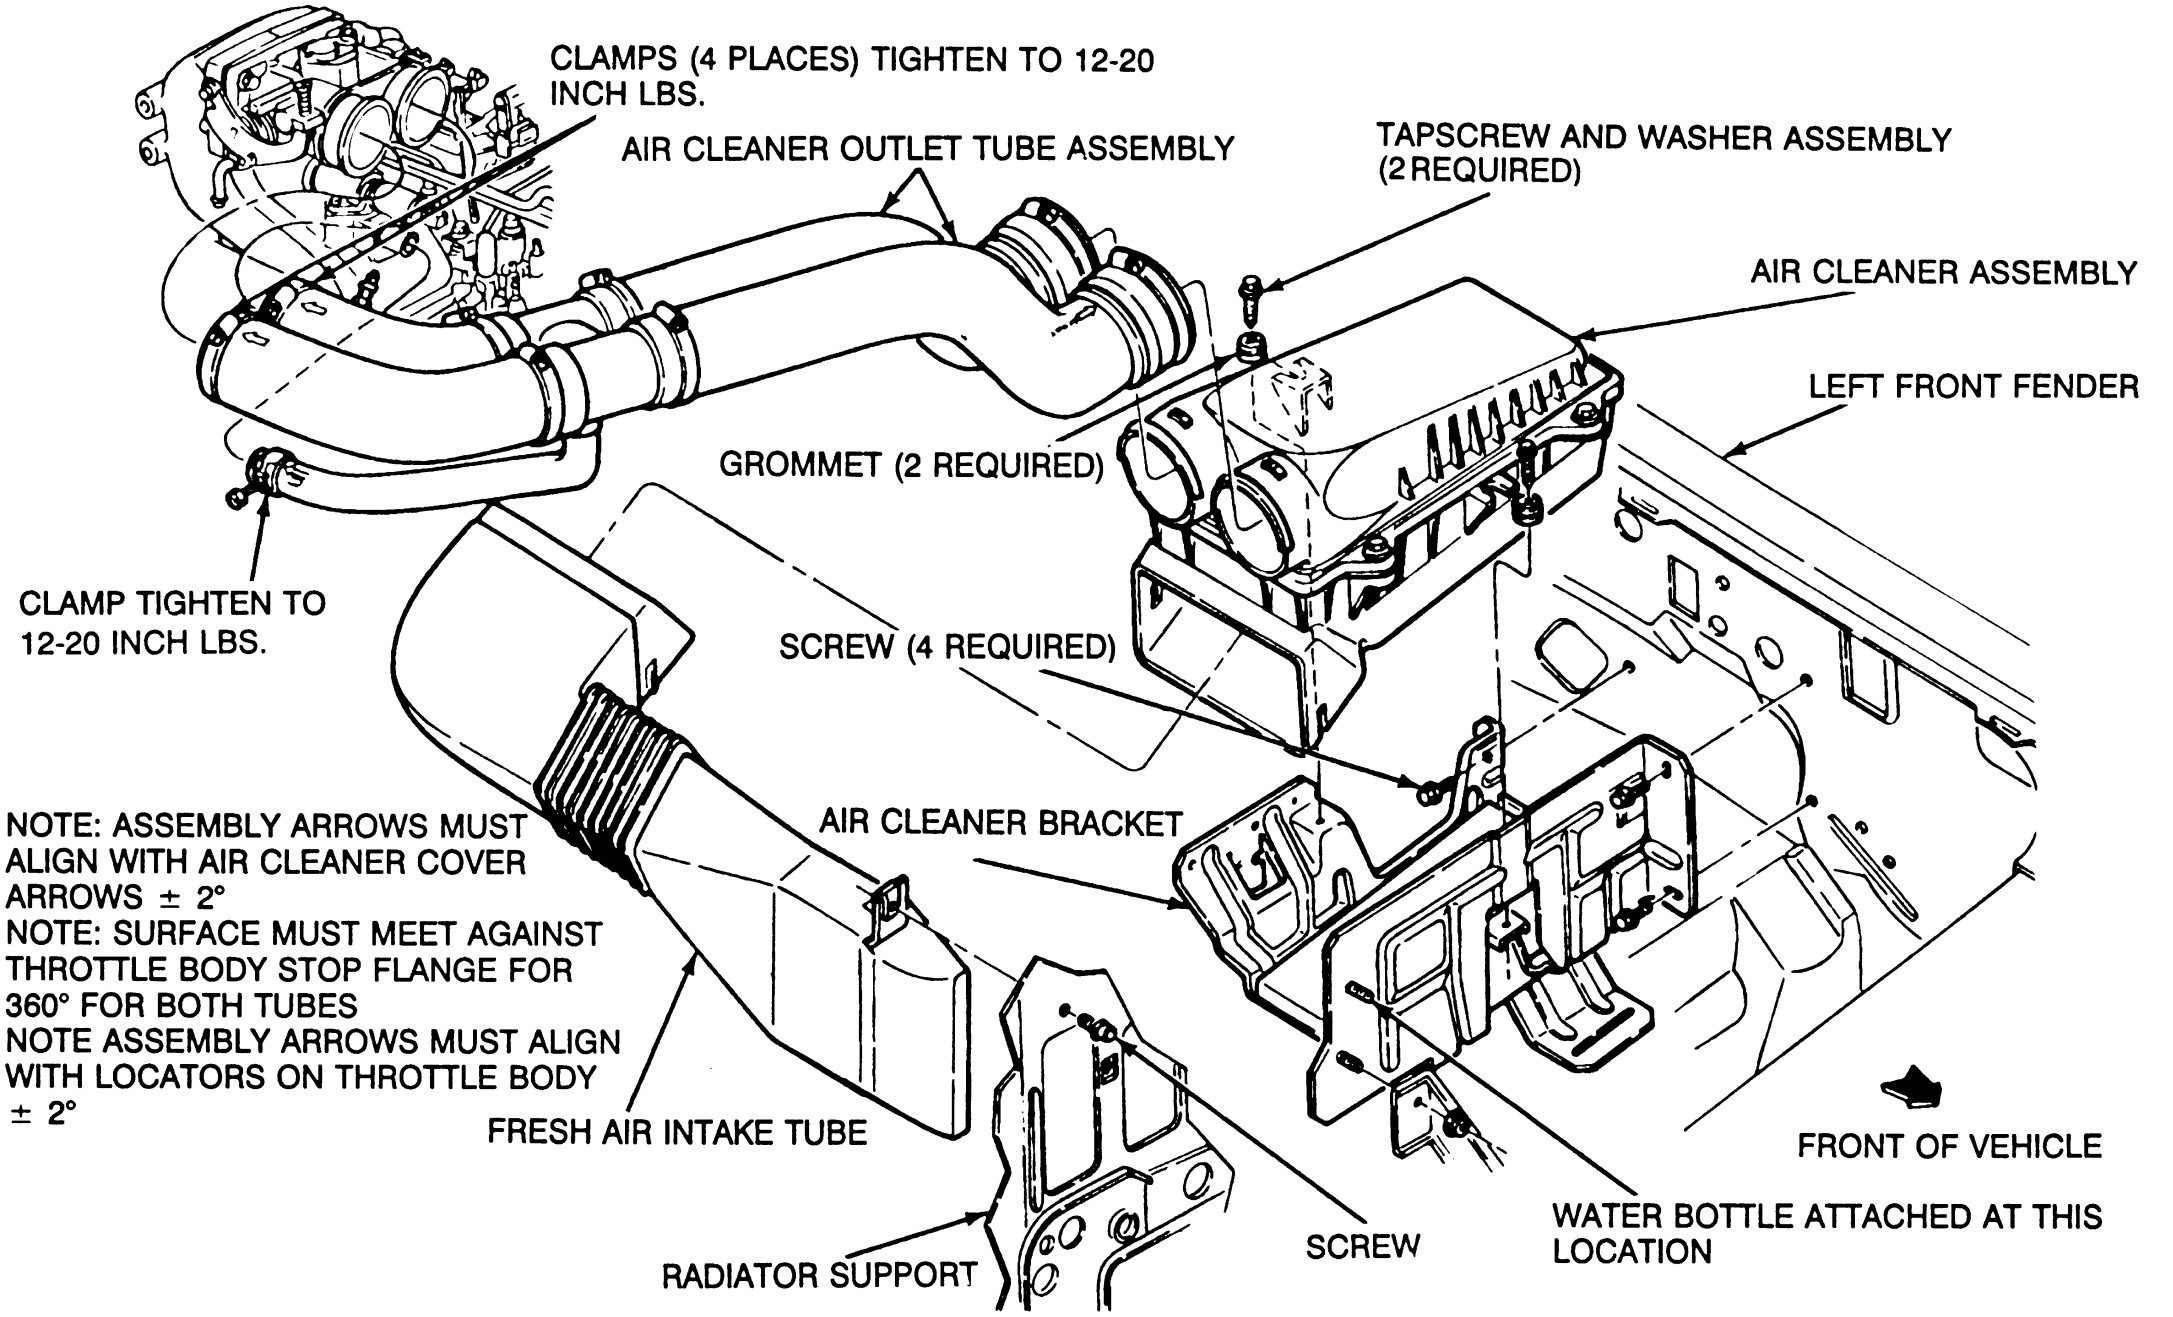
CLAMPS (4 PLACES) TIGHTEN TO 12-20 INCH LBS.
AIR CLEANER OUTLET TUBE ASSEMBLY
TAPSCREW AND WASHER ASSEMBLY (2 REQUIRED)
AIR CLEANER ASSEMBLY
LEFT FRONT FENDER
GROMMET (2 REQUIRED)
CLAMP TIGHTEN TO 12-20 INCH LBS.
SCREW (4 REQUIRED)
NOTE: ASSEMBLY ARROWS MUST ALIGN WITH AIR CLEANER COVER ARROWS ± 2°
NOTE: SURFACE MUST MEET AGAINST THROTTLE BODY STOP FLANGE FOR 360° FOR BOTH TUBES
NOTE ASSEMBLY ARROWS MUST ALIGN WITH LOCATORS ON THROTTLE BODY ± 2°
AIR CLEANER BRACKET
FRESH AIR INTAKE TUBE
FRONT OF VEHICLE
RADIATOR SUPPORT
SCREW
WATER BOTTLE ATTACHED AT THIS LOCATION