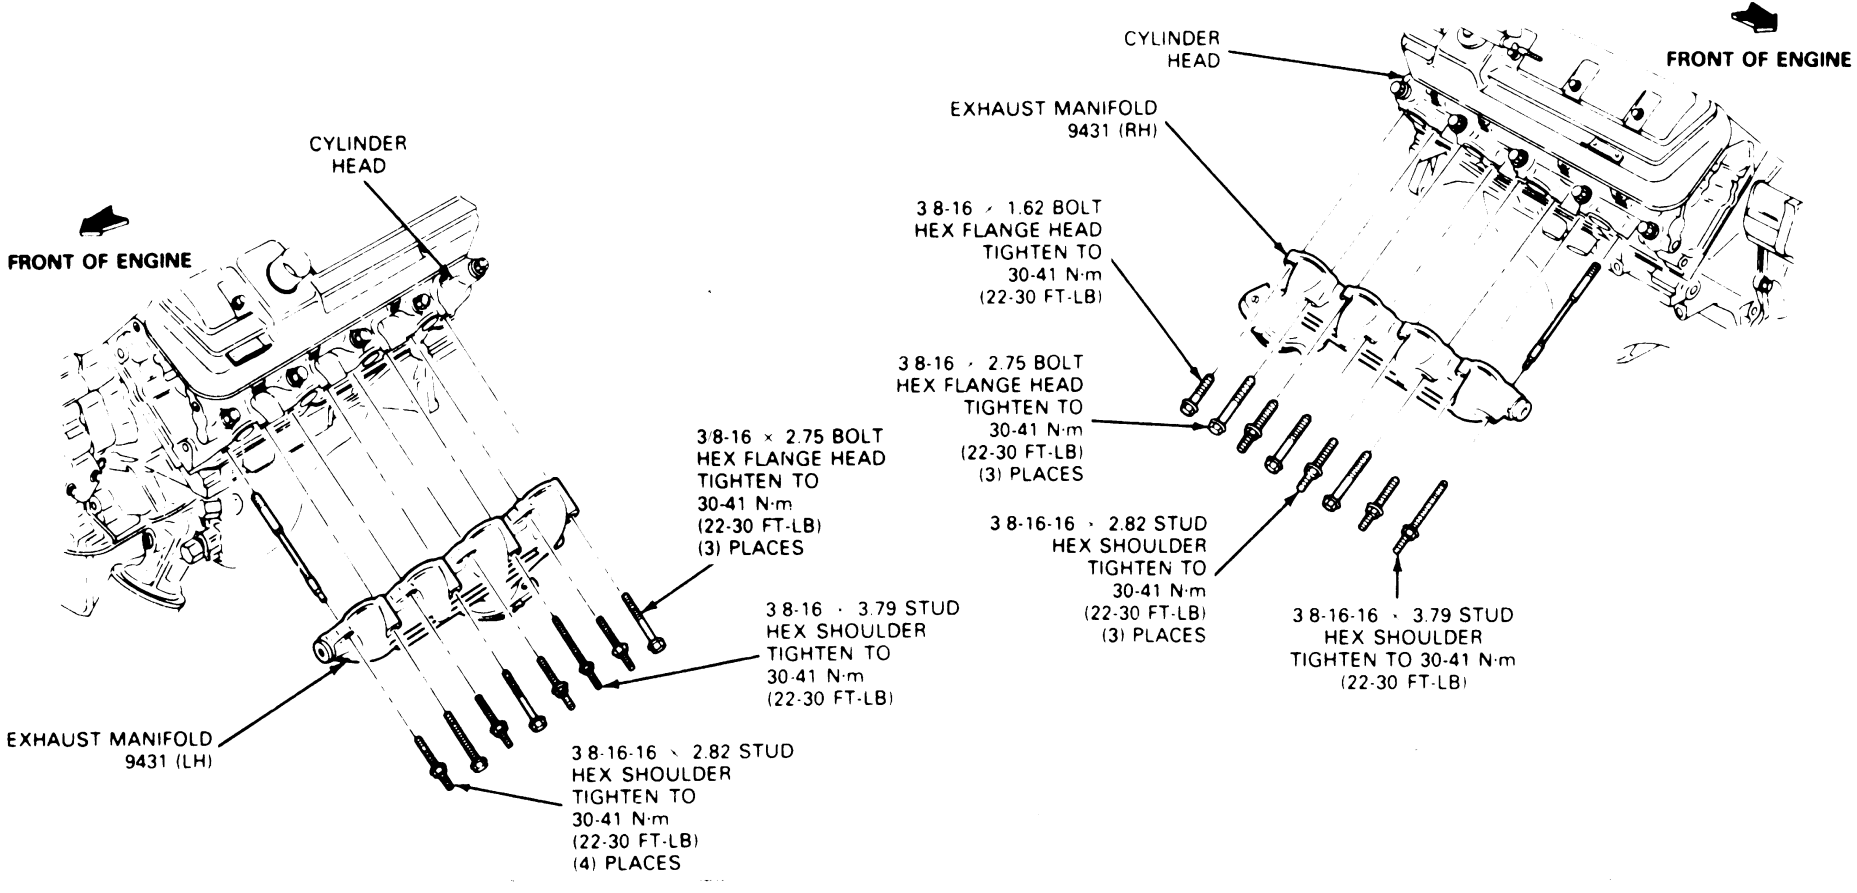
CYLINDER HEAD
FRONT OF ENGINE
3/8-16 x 2.75 BOLT HEX FLANGE HEAD TIGHTEN TO 30-41 N·m (22-30 FT-LB) (3) PLACES
3 8-16 - 3.79 STUD HEX SHOULDER TIGHTEN TO 30-41 N·m (22-30 FT-LB)
EXHAUST MANIFOLD 9431 (LH)
3 8-16-16 x 2.82 STUD HEX SHOULDER TIGHTEN TO 30-41 N·m (22-30 FT-LB) (4) PLACES
CYLINDER HEAD
FRONT OF ENGINE
EXHAUST MANIFOLD 9431 (RH)
3 8-16 - 1.62 BOLT HEX FLANGE HEAD TIGHTEN TO 30-41 N·m (22-30 FT-LB)
3 8-16 - 2.75 BOLT HEX FLANGE HEAD TIGHTEN TO 30-41 N·m (22-30 FT-LB) (3) PLACES
3 8-16-16 - 2.82 STUD HEX SHOULDER TIGHTEN TO 30-41 N·m (22-30 FT-LB) (3) PLACES
3 8-16-16 - 3.79 STUD HEX SHOULDER TIGHTEN TO 30-41 N·m (22-30 FT-LB)