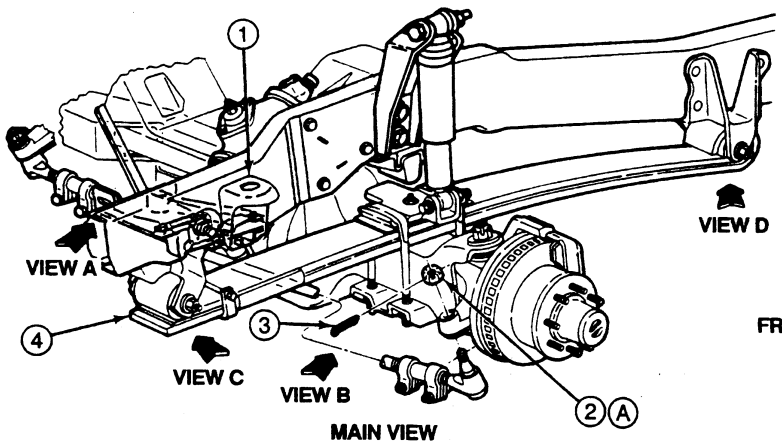


MAIN VIEW

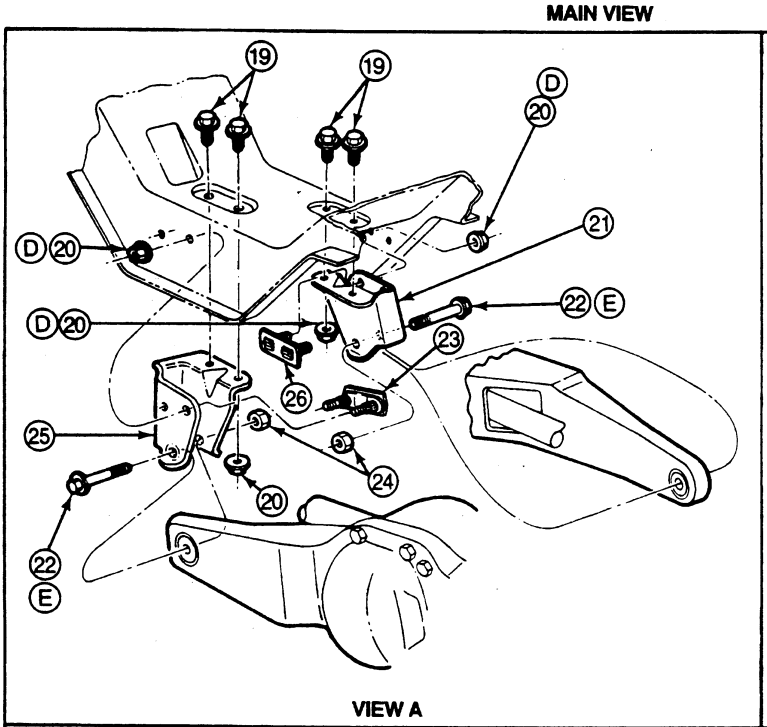

VIEW A

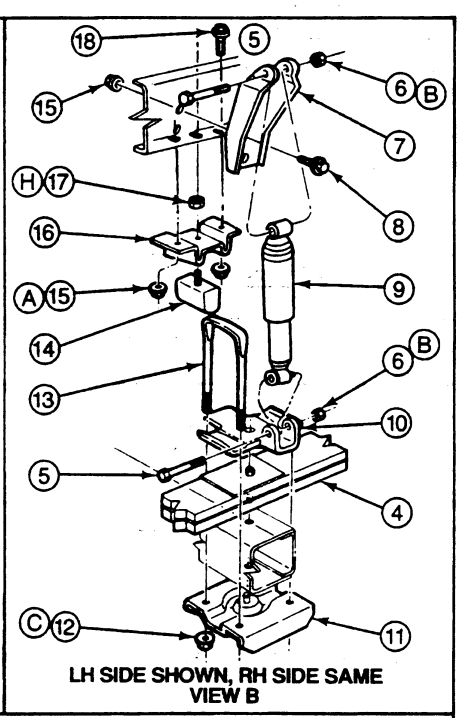

LH SIDE SHOWN, RH SIDE SAME
VIEW B

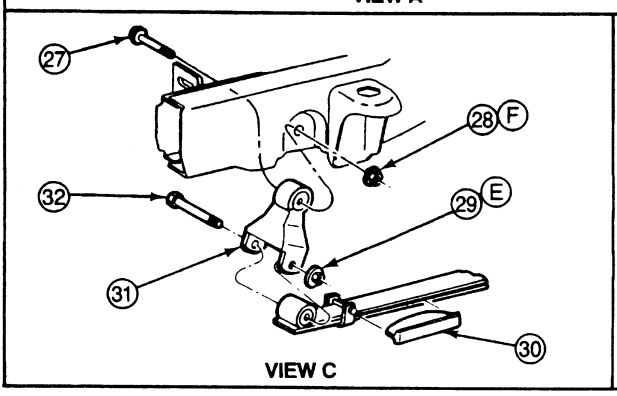

VIEW C

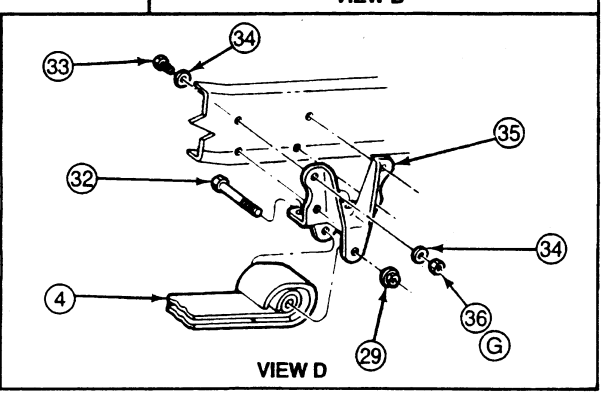

VIEW D

| Item | Description |
|---|---|
| 1 | Steering Gear Sector Shaft Arm |
| 2 | Nut |
| 3 | Cotter Pin |
| 4 | Front Leaf Spring |
| 5 | Bolt |
| 6 | Nut |
| 7 | Front Shock Absorber Mounting Bracket |
| 8 | Bolt |
| 9 | Front Shock Absorber |
| 10 | Front Spring Plate Spacer |
| 11 | U-Bolt Spacer |
| 12 | Nut |
| 13 | U-Bolt |
| 14 | Front Suspension Bumper |
| 15 | Nut |
| 16 | Front Suspension Bumper Bracket |
| 17 | Nut |
| 18 | Bolt |
| 19 | Bolt |
| 20 | Nut |
| 21 | Axle Pivot Bracket (RH) |
| 22 | Bolt |
| 23 | Bolt and Retainer |
| 24 | Nut |

| Item | Description |
|---|---|
| 25 | Front Axle Bearing Bracket |
| 26 | Bolt and Retainer |
| 27 | Bolt |
| 28 | Nut |
| 29 | Nut |
| 30 | Spring Insulator Sleeve |
| 31 | Front Spring Front Shackle |
| 32 | Bolt |
| 33 | Bolt |
| 34 | Washer |
| 35 | Front Spring Mounting Bracket |
| 36 | Nut |
| A | Tighten to 77-103 N·m (57-76 Lb-Ft) |
| B | Tighten to 60-80 N·m (44-59 Lb-Ft) |
| C | Tighten to 113-153 N·m (83-113 Lb-Ft) |
| D | Tighten to 88-118 N·m (65-87 Lb-Ft) |
| E | Tighten to 149-201 N·m (110-148 Lb-Ft) |
| F | Tighten to 170-230 N·m (125-170 Lb-Ft) |
| G | Tighten to 47-78 N·m (35-58 Lb-Ft) |
| H | Tighten to 31-40 N·m (23-30 Lb-Ft) |