

2004 Cadillac SRX

2004 ENGINE COOLING Specifications & Drive Belt Routing - SRX 3.6L

2004 ENGINE COOLING

Specifications & Drive Belt Routing - SRX 3.6L

ADJUSTMENTS


CAUTION: When battery is disconnected, vehicle computer and memory systems may lose memory data. Driveability problems may exist until computer systems have completed a relearn cycle. See COMPUTER RELEARN PROCEDURES in COMPUTER RELEARN PROCEDURES article in GENERAL INFORMATION before disconnecting battery.

BELT ADJUSTMENT

Application	Specification
Serpentine Belt	(1)
(1) Serpentine belt tension is maintained automatically by a spring-tensioned idler pulley. No adjustment is necessary.	


DRIVE BELT ROUTING

NOTE: For serpentine belt routing, see underhood label or refer to illustration. See Fig. 1 and Fig. 2.

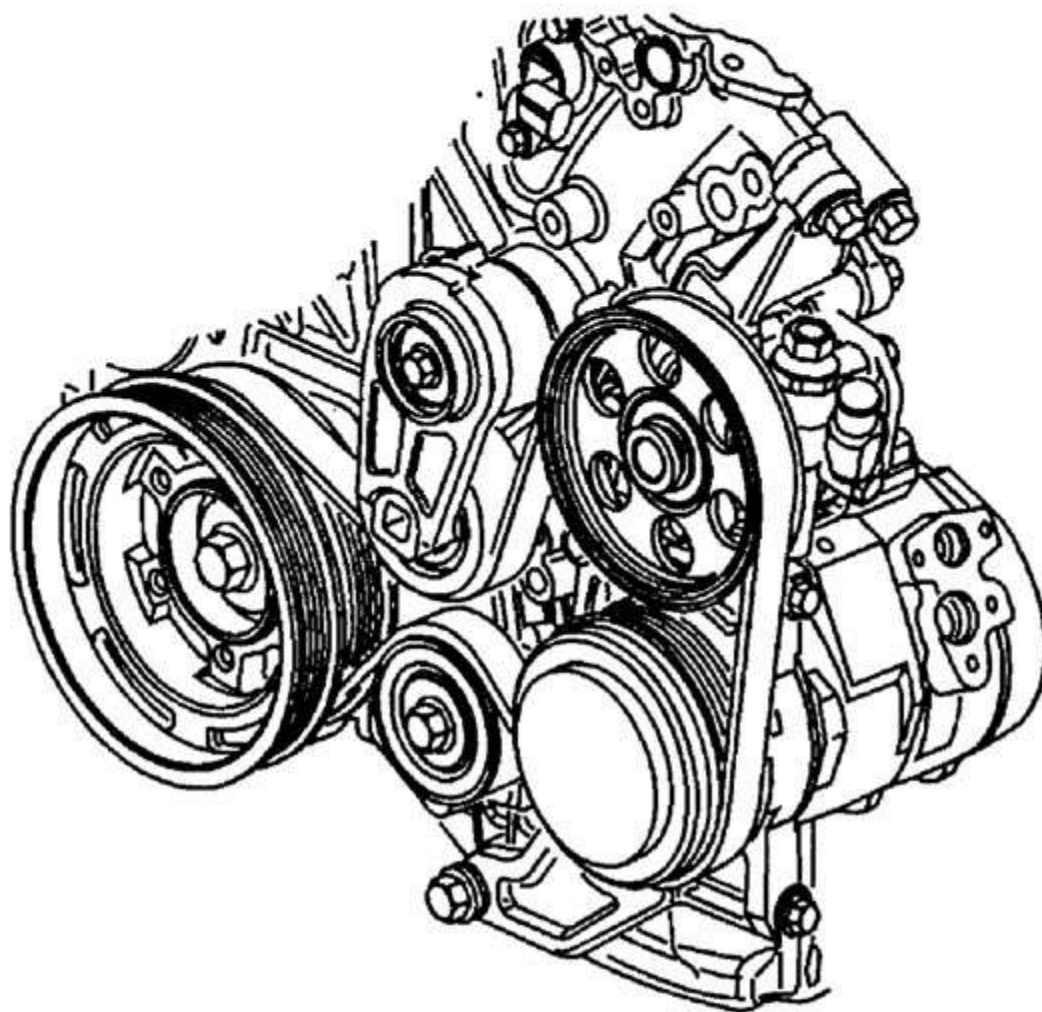

G00310253

Fig. 1: Serpentine Belt Routing (A/C & Power Steering)
Courtesy of GENERAL MOTORS CORP.

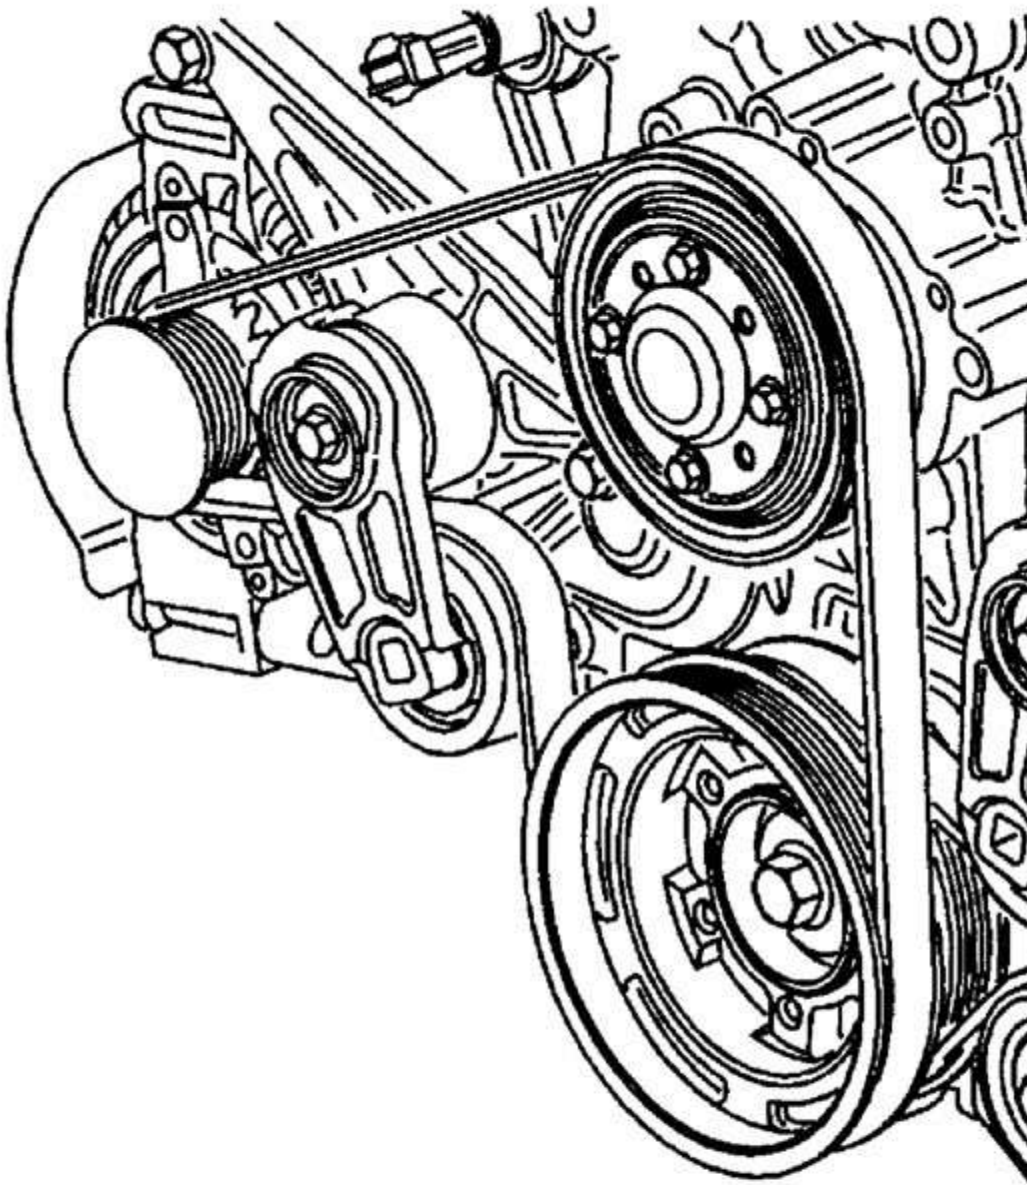

G00310257

Fig. 2: Serpentine Belt Routing (Generator & Water Pump)
Courtesy of GENERAL MOTORS CORP.

COOLING SYSTEM SPECIFICATIONS

COOLING SYSTEM SPECIFICATIONS

Application	Specification
Coolant Replacement Interval	60 Months Or 150,000 Miles 11.7 Qts. (11.1L)

2004 Cadillac SRX

2004 ENGINE COOLING Specifications & Drive Belt Routing - SRX 3.6L

Application	Specification
Coolant Capacity (1)	
Coolant Replacement Interval	60 Months Or 150,000 Mi (2)
Pressure Cap	
Thermostat	
Starts To Open	194°F (90°C)
Fully Opens	225°F (107°C)
(1) Specification is approximate and includes heater capacity.	
(2) Specification is stamped on cap.	