



Cruise Control Switch Replacement

Removal Procedure

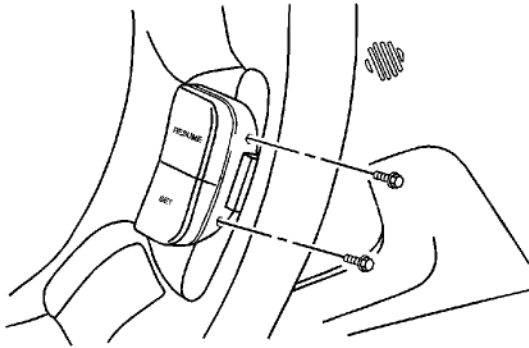

1. Disconnect the negative battery cable.
2. Remove the screws and the cruise control switch.
3. Disconnect the cruise control switch connector.

Installation Procedure

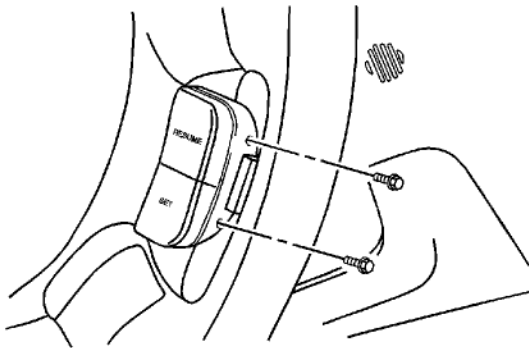



1. Connect the cruise control switch connector.
2. Install the cruise control switch and the screws.
3. Connect the negative battery cable.

Clutch Pedal Cruise Control Release Switch Adjustment

Cruise Control Clutch Switch Adjustment

1. Push the switch assembly through the pedal support and turn 90 degrees.
2. Hold the clutch pedal to the rest position.
3. Connect the cruise control clutch pedal switch electrical connector.
4. Verify the operation of the clutch switch by operating the cruise control and checking the clutch switch stops operation of the cruise control when the clutch pedal is pressed.

Clutch Pedal Cruise Control Release Switch Replacement

Removal Procedure

1. Disconnect the cruise control clutch pedal switch electrical connector.
2. Turn the switch 90 degrees counterclockwise and remove.

Installation Procedure

1. Position the cruise control clutch switch in the pedal support, then turn the switch 90 degrees clockwise.
2. Connect the cruise control clutch pedal switch electrical connector.
3. Adjust the cruise control clutch pedal switch. Refer to [Clutch Pedal Cruise Control Release Switch Adjustment](#) .