



Front Fender Center Molding Replacement (Hatchback)

Removal Procedure

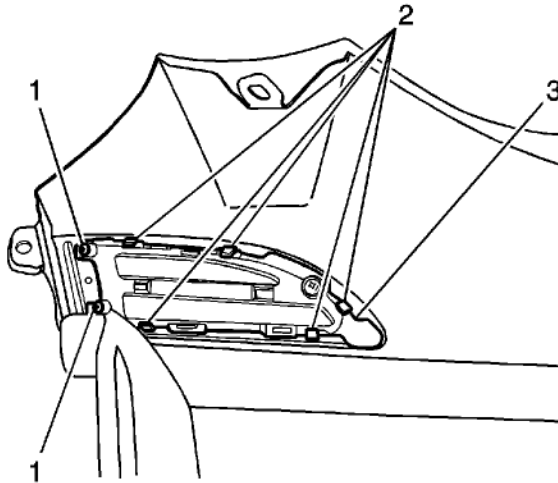

1. Remove the fender. Refer to [Front Fender Replacement](#)
2. Remove the screws (1).
3. Disengage the retaining tabs (2) and remove the fender molding (3) by pushing it out from the inside of the fender.


Installation Procedure

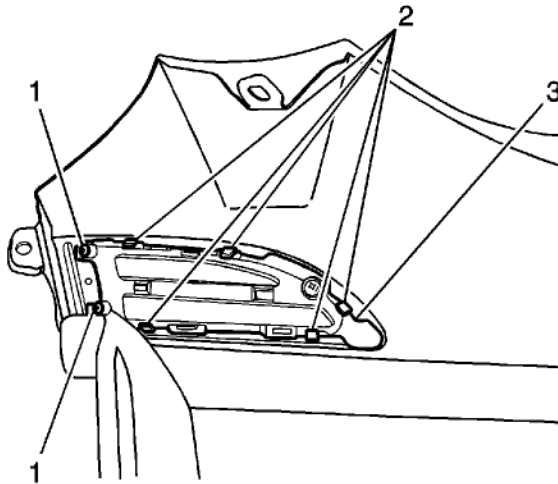

1. Install the fender molding (3) by pushing the retaining tabs (2) in from the outside of the fender.
2. Install the screws (1).
3. Install the fender. Refer to [Front Fender Replacement](#)


Fascia Grille Replacement (Notchback)

Removal Procedure

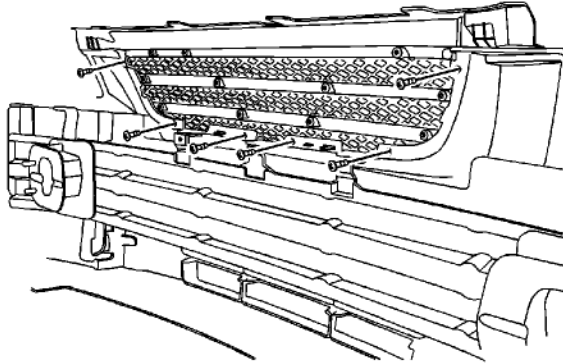

1. Open the hood.
2. Remove the front bumper fascia. Refer to [Front Bumper Fascia Replacement](#).
3. Remove the screws and the radiator grille.

Installation Procedure

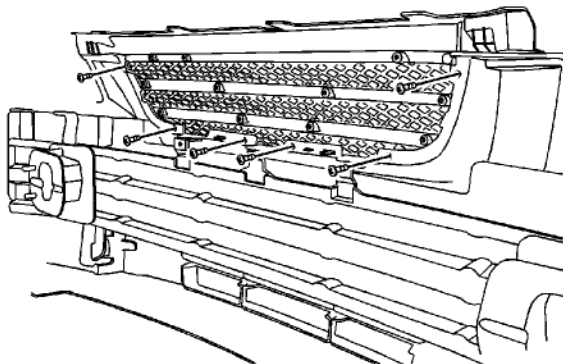





1. Install the radiator grille with the screws.
2. Install the front bumper fascia. Refer to [Front Bumper Fascia Replacement](#) .
3. Close the hood.

Fascia Grille Replacement (Hatchback)

Removal Procedure

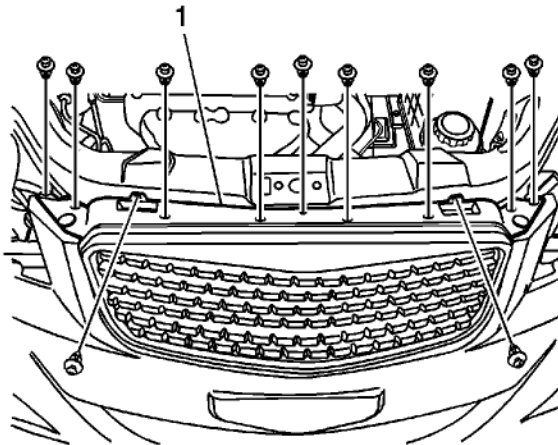


1. Open the hood.
2. Remove the upper clips on the radiator grille.
3. Remove the radiator grille upper cover (1).

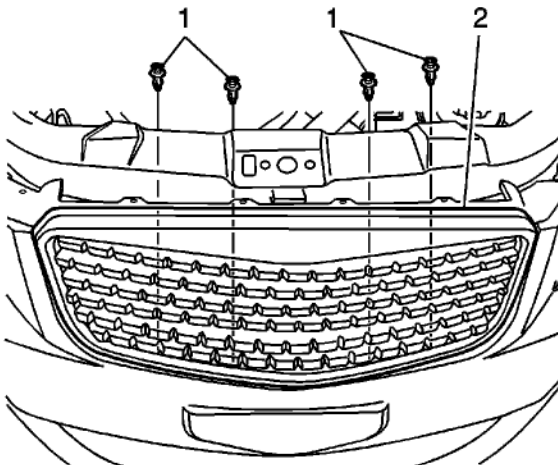


4. Remove the grille to front fascia clips (1).
5. Remove the radiator grille (2).

© 2010 General Motors Corporation. All rights reserved.

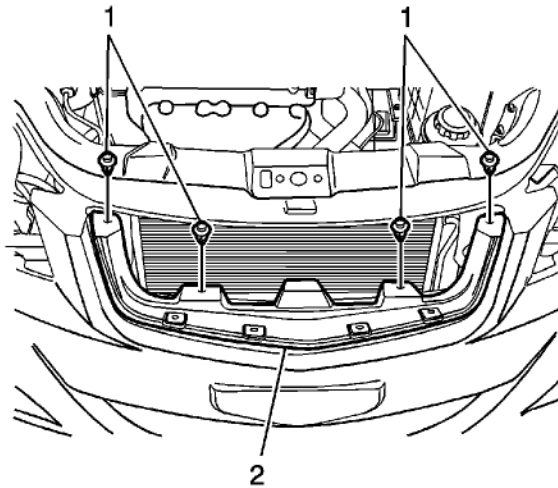


6. Remove the front fascia air guard clips (1), if necessary.
7. Remove the front fascia air guard (2) from the vehicle, if necessary.


Installation Procedure

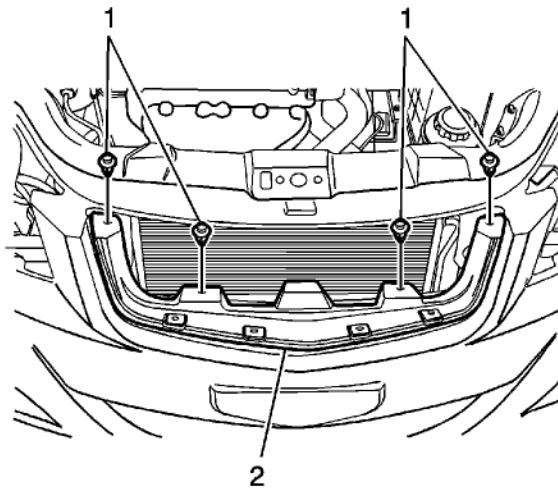

1. Install the front fascia air guard (2) to the vehicle, if removed.
2. Install the front fascia air guard clips (1), if removed.

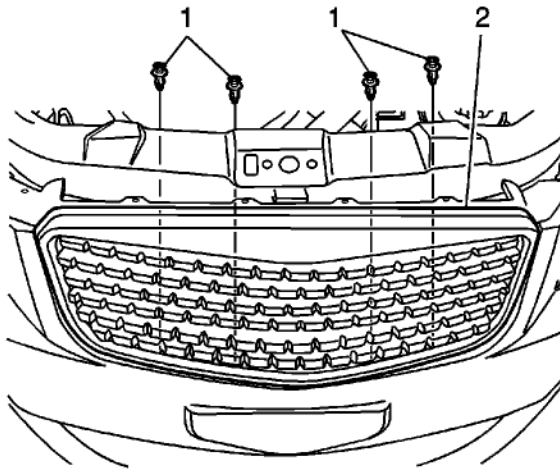


3. Install the radiator grille (2).
4. install the grille to front fascia clips (1).

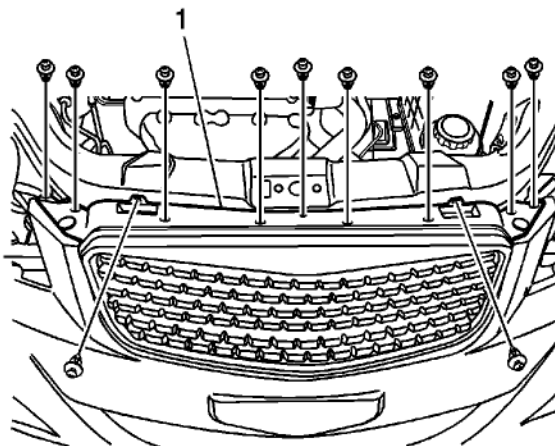

5. Install the radiator grille upper cover (1).
6. Install the upper clips on the radiator grille.
7. Close the hood.


Body Side Roof Drip Molding Replacement

Removal Procedure

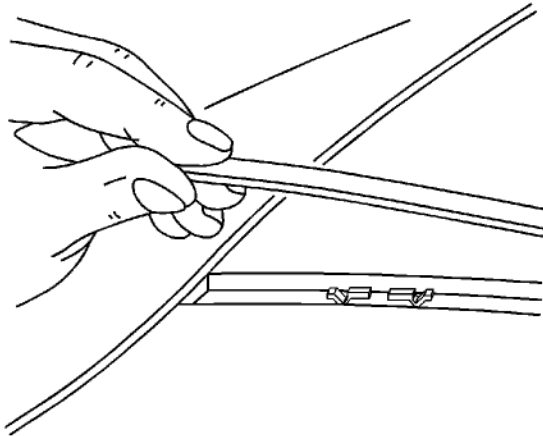

Remove the roof molding from the plastic clips.

Installation Procedure

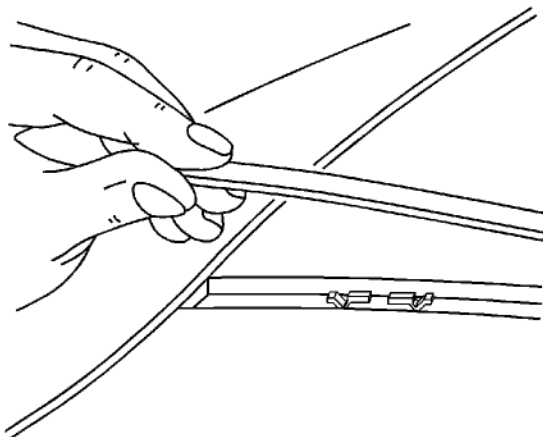




Press the roof molding onto the plastic clips.


Rear Spoiler Replacement (Hatchback)

Removal Procedure

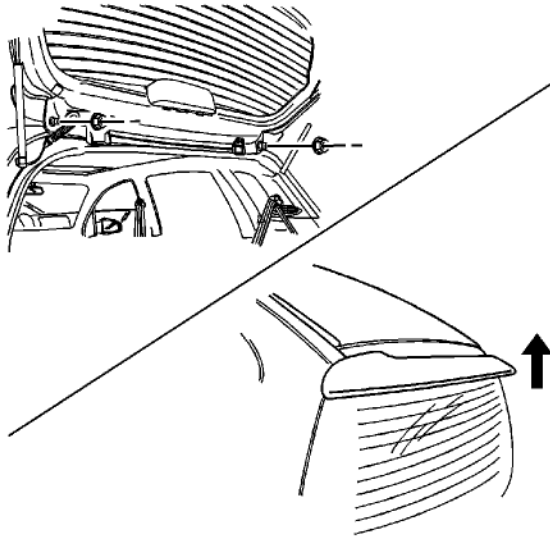

1. Open the tail gate.
2. Remove the rear spoiler from the tail gate.

Installation Procedure

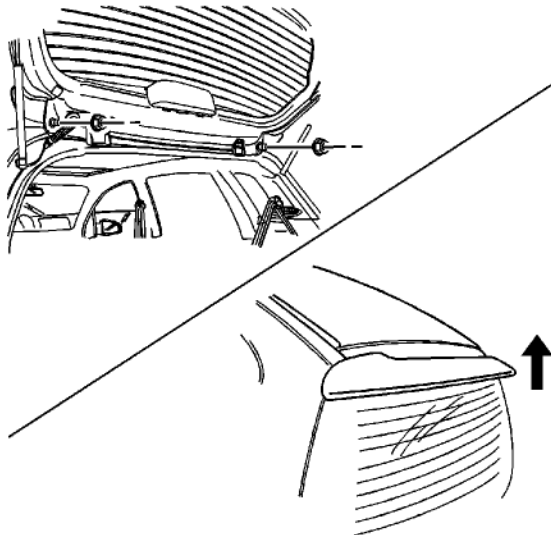

© 2010 General Motors Corporation. All rights reserved.




Install the rear spoiler on the tail gate with the nuts.


Rear Spoiler Replacement (Notchback)

Removal Procedure

Warning: Refer to [Battery Disconnect Warning](#) in the Preface section.

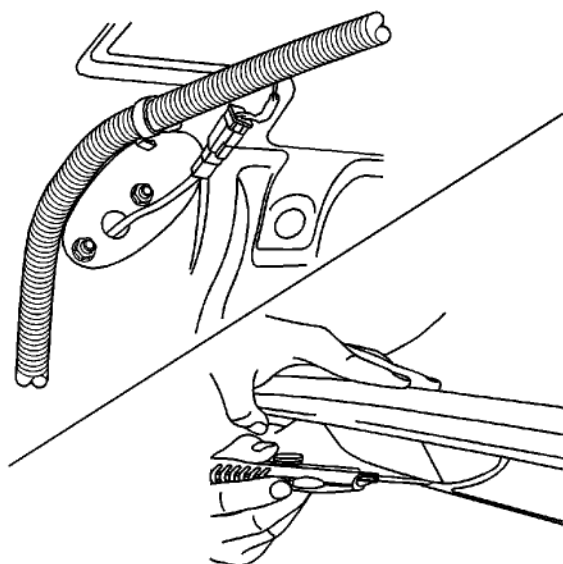


1. Disconnect the negative battery cable. Refer to [Battery Negative Cable Disconnection and Connection](#).
2. Remove the clips and rear compartment trim.
3. Disconnect the rear spoiler electrical connector.
4. Remove the nuts.
5. Using a flat-bladed tool, carefully separate the rear spoiler from the rear compartment lid.

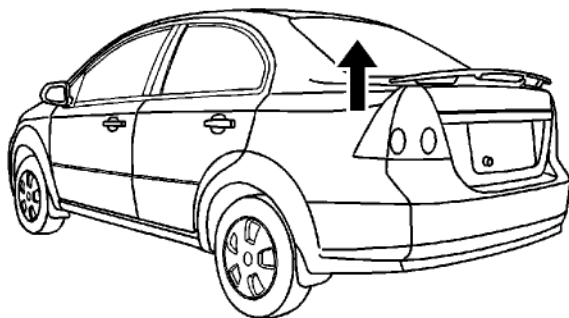



6. Remove the rear spoiler from the rear compartment lid.


Installation Procedure

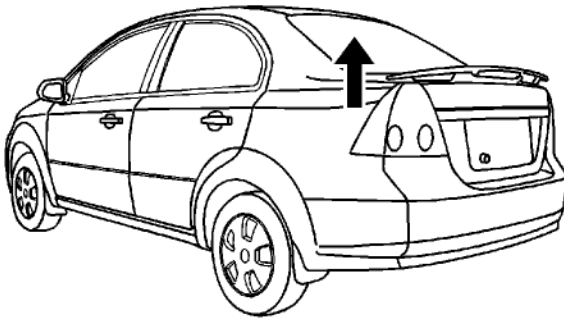

Note: If reusing the rear spoiler, remove any remaining double-sided tape from the rear spoiler and the rear compartment lid.

1. Apply new double-sided tape.
2. Peel off the adhesive backing paper and affix the rear spoiler on to the rear compartment lid, ensuring it is carefully positioned.

Caution: Refer to [Fastener Caution](#) in the Preface section.

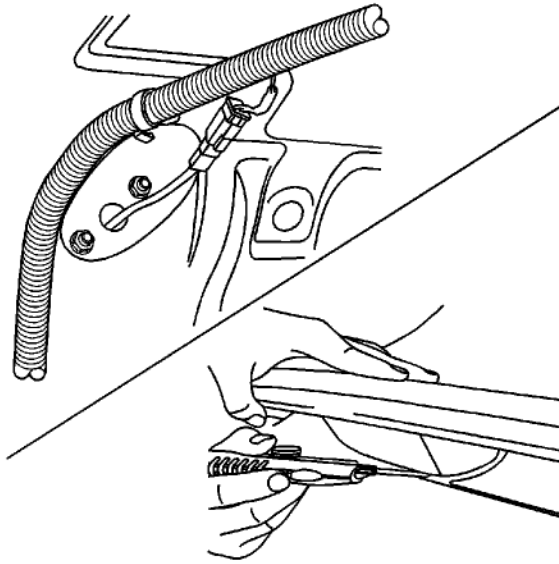

3. Install the nuts attaching the rear spoiler and tighten to **3 N·m (27 lb in)**.
4. Install the rear compartment lid trim with the clips.
5. Connect the negative battery cable.