

[2009 Chevrolet Express - AWD](#) | [Express, Savana \(VIN G/H\) Service Manual](#) | [Seats](#) | [Power Seats](#) | [Specifications](#) |

Document ID: 1755744


Fastener Tightening Specifications

Application	Specification	
	Metric	English
Power Seat Switch Screw	2 N·m	18 lb in

cardiagn.com


Power Seat Switch Replacement

Removal Procedure

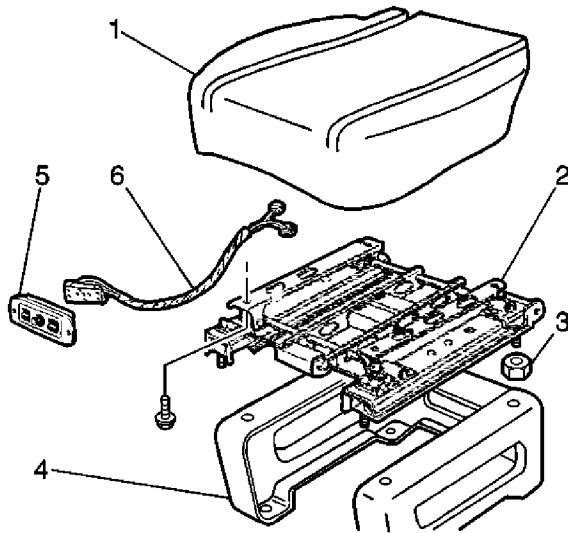

1. Remove the screws that retain the power seat adjuster switch (5) to the seat cushion (1).
2. Remove the power seat adjuster switch from the seat cushion.
3. Disconnect the electrical connector from the power seat adjuster switch.
4. Remove the power seat adjuster switch from the vehicle.

Installation Procedure

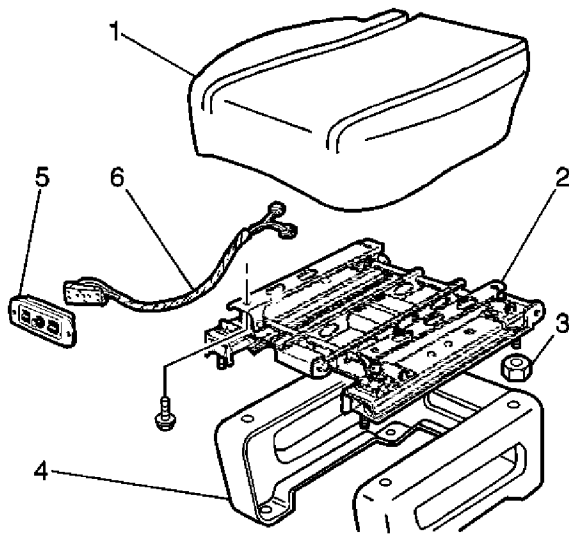

1. Install the power seat adjuster switch (5) to the vehicle.
2. Connect the electrical connector to the power seat adjuster switch.
3. Install the power seat adjuster switch to the seat cushion (1).

Caution: Refer to [Fastener Caution](#) in the Preface section.

4. Install the screws in order to retain the power seat adjuster switch to the seat cushion and tighten to **2 N·m (18 lb in)**.