

FRAME AND BUMPERS

CONTENTS

page

FRAME 1

FRAME

INDEX

page

page

REMOVAL AND INSTALLATION

FRONT LICENSE PLATE BRACKET 1
FRONT TOE HOOK BRACKET 2

REAR LICENSE PLATE BRACKET 2
REAR TOW HOOK BRACKET 3

REMOVAL AND INSTALLATION

FRONT LICENSE PLATE BRACKET


Removal

- (1) Remove the license plate from the bracket.
- (2) Remove the license plate bracket attaching screws (Fig. 1).

- (3) Remove the license plate bracket from the front bumper fascia.

Installation

- (1) Position the license plate bracket on the front bumper fascia.
- (2) Install the attaching screws.
- (3) Install the license plate on the license plate bracket.

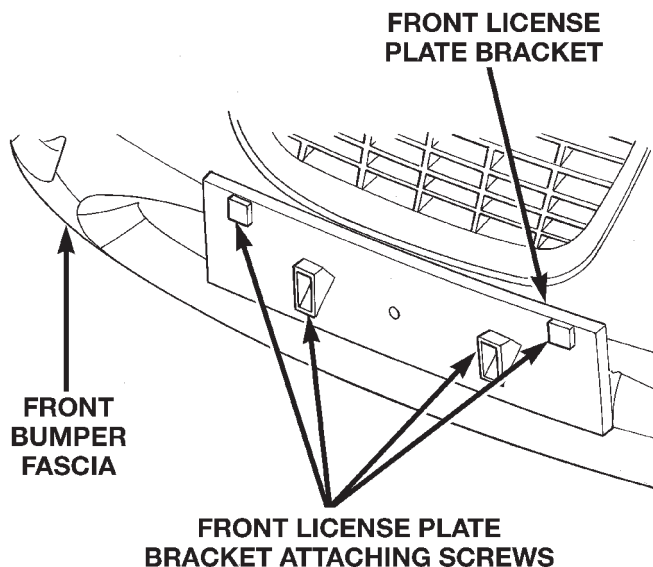


80b5749b

Fig. 1 Front License Plate Bracket

REMOVAL AND INSTALLATION (Continued)

FRONT TOE HOOK BRACKET**REMOVAL**

- (1) Remove the toe hook from the toe hook bracket.
- (2) Open hood and disconnect the negative battery cable remote terminal from the battery post.
- (3) Hoist vehicle.
- (4) Partially remove the front fascia to gain access to the windshield/headlamp washer reservoir. Refer to Group 23, Body for Removal and Installation procedures.
- (5) Remove the toe hook bracket mounting fasteners.
- (6) Remove the toe hook bracket (Fig. 2).

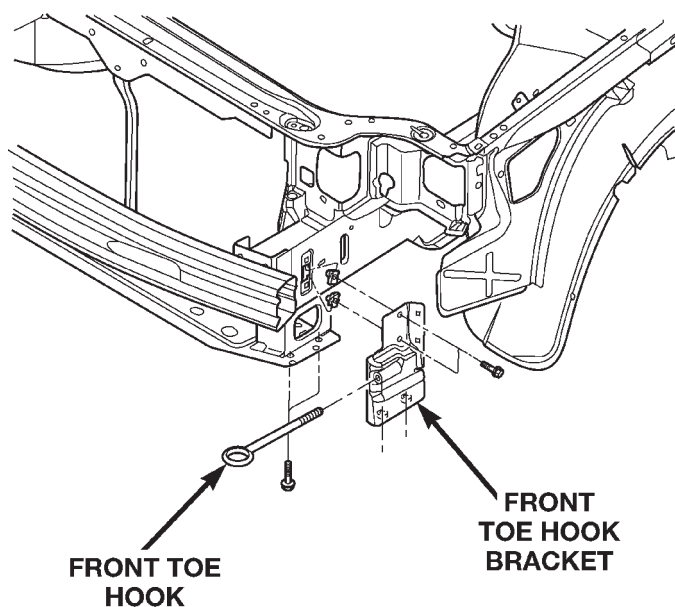


80b5cbcb

Fig. 2 Front Toe Hook Bracket**Installation**

- (1) Install the front toe hook bracket and fasteners. Torque bolts to 23 to 34 N.m.
- (2) Reinstall the front fascia as necessary. Refer to Group 23, Body for Removal and Installation procedures.
- (3) Lower vehicle from the hoist.
- (4) Install the toe hook into the toe hook bracket.
- (5) Reconnect the negative battery cable at the remote battery post.

REAR LICENSE PLATE BRACKET**Removal**

- (1) Remove the license plate from the bracket.
- (2) Remove the license plate bracket attaching screws (Fig. 3).

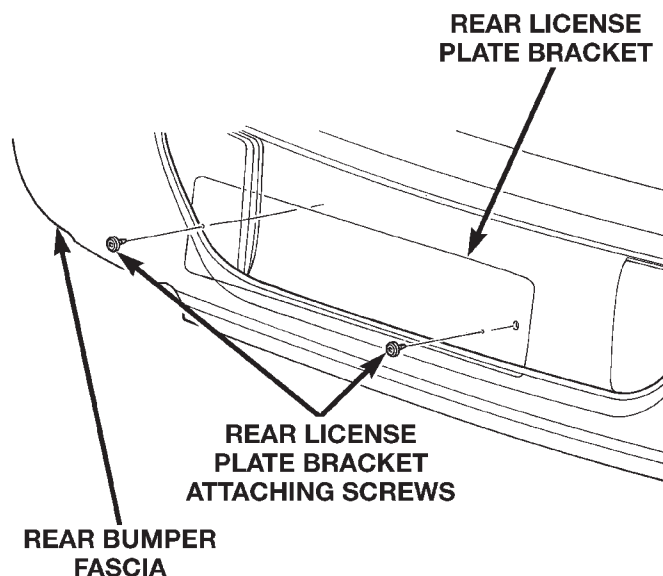

80b5749c

Fig. 3 Rear License Plate Bracket

- (3) Remove the license plate bracket from the rear bumper fascia.

Installation

- (1) Position the license plate bracket on the rear bumper fascia.
- (2) Install the attaching screws.
- (3) Install the license plate on the license plate bracket.

REMOVAL AND INSTALLATION (Continued)

REAR TOW HOOK BRACKET**REMOVAL**

(1) Hoist and support vehicle. Refer to Group 0, Lubrication and Maintenance, for proper lifting procedure.

(2) Remove bolts holding rear tow hook bracket to rear frame rail (Fig. 4) (Fig. 5).

(3) Separate rear tow hook bracket from vehicle.

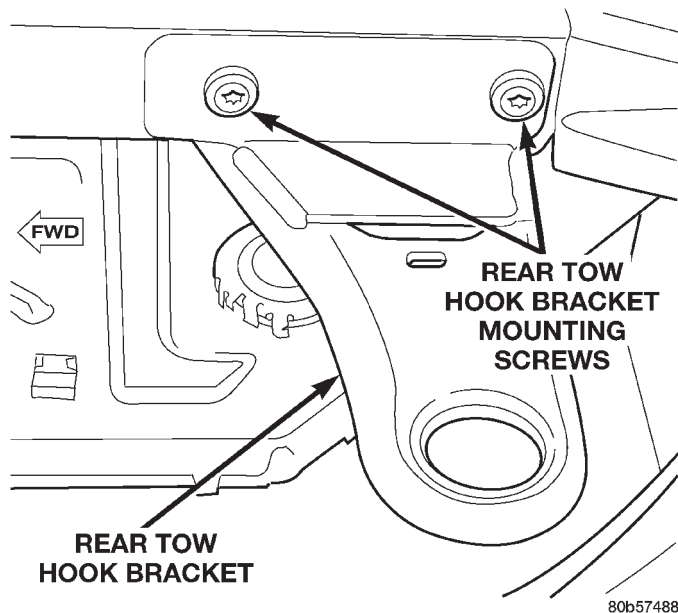


Fig. 4 Rear Tow Hook Bracket

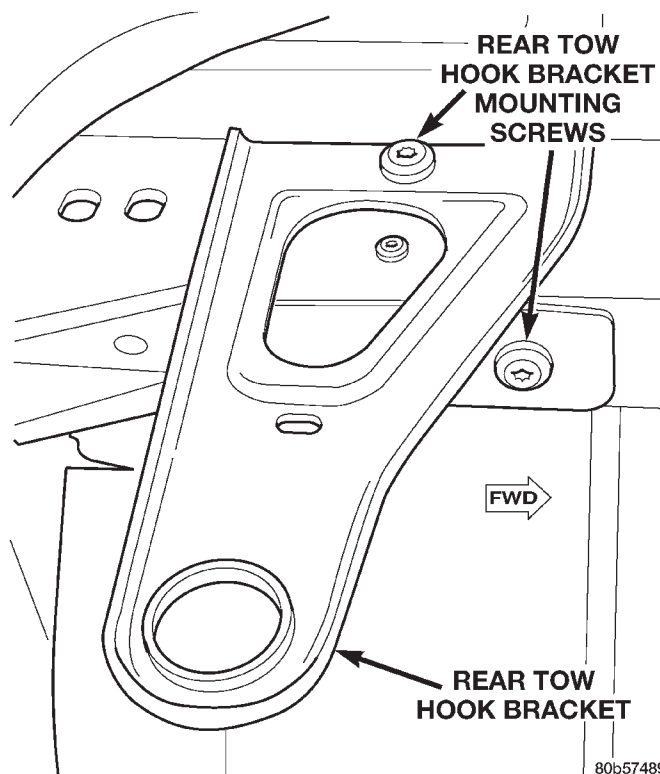


Fig. 5 Rear Tow Hook Bracket

INSTALLATION

- (1) Position rear tow hook bracket on vehicle.
- (2) Install bolts to hold rear tow hook bracket to rear frame rail.
- (3) Lower vehicle.

