
GROUP 4

CORROSION PROTECTION

CONTENTS

BODY SEALING LOCATIONS	4-2	UNDERCOAT APPLICATION LOCATIONS	4-7
----------------------------------	-----	--	-----


BODY SEALING LOCATIONS

M4040001002565

If the sealant application is directly visible on the outer plate and requires appearance quality of the application in areas such as the drip rail, pillar, clinch and so on, then apply the sealant so that it is flat, or wipe off any excess mounding after the application. Be careful not to obstruct the water draining hole.

NOTE: The bold dotted line indicates the application area on the underside.

FLOOR

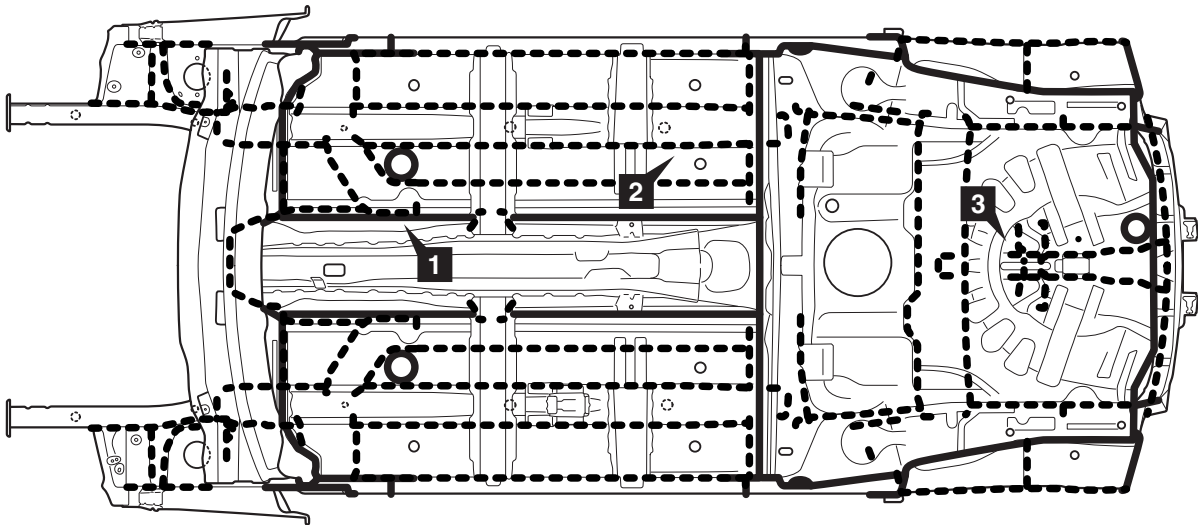

ABC00401AB

UPPER BODY

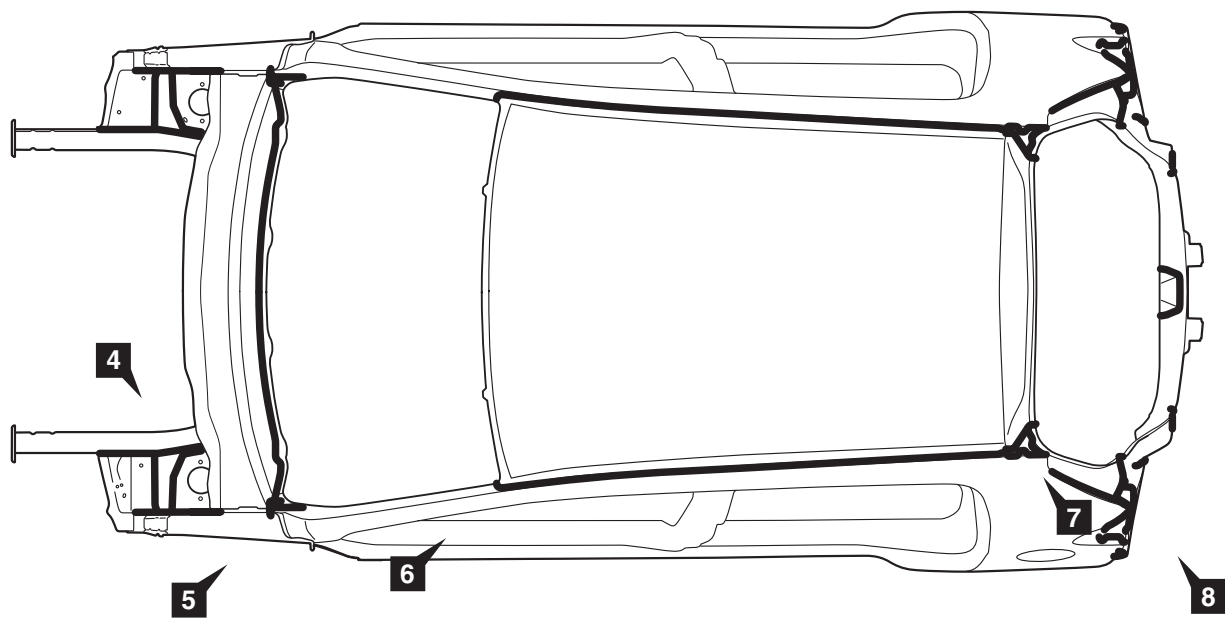


ABB00598AB

SIDE BODY

















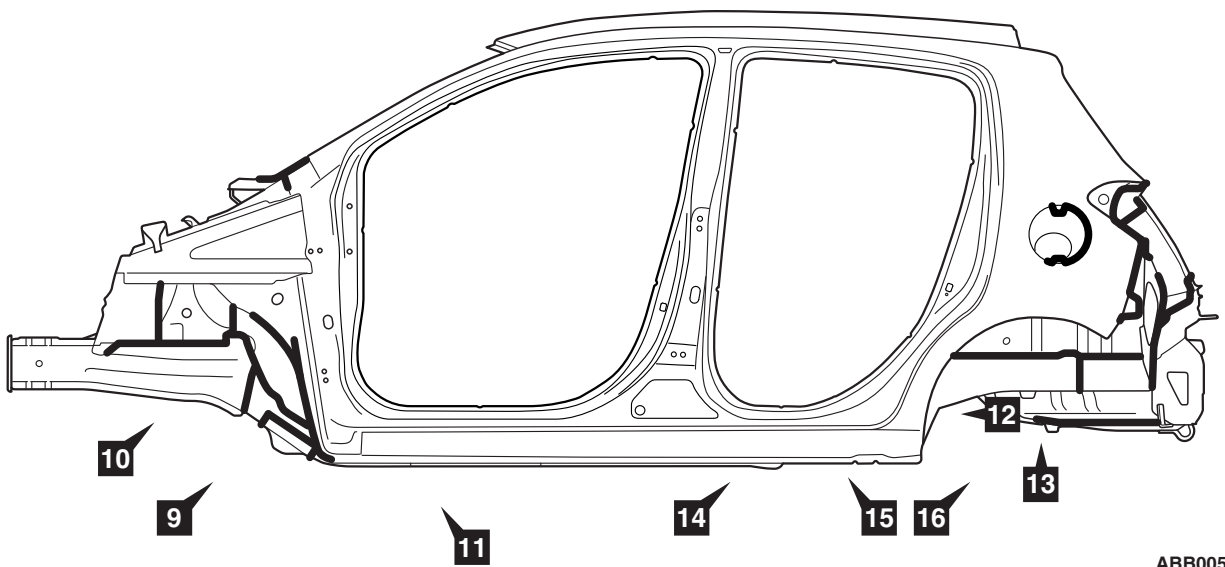


ABB00599AB

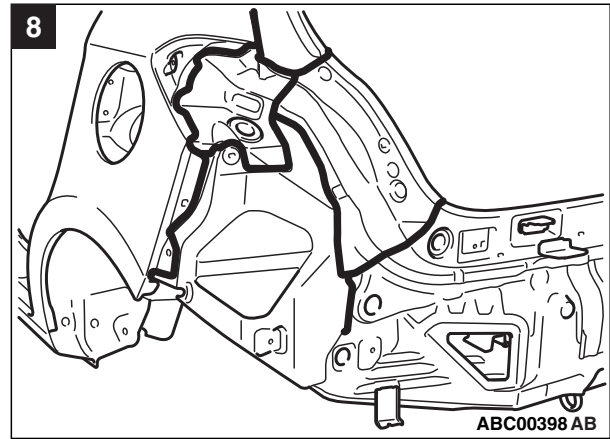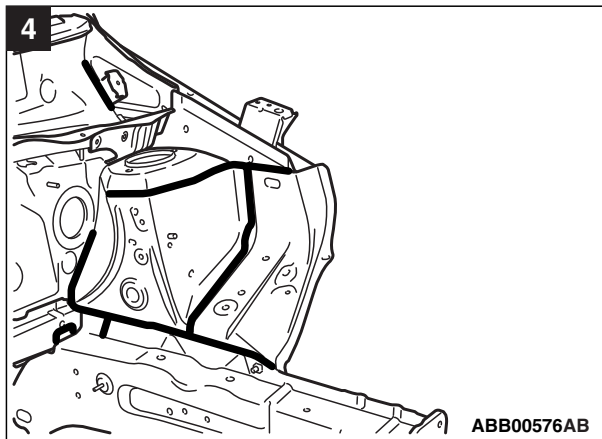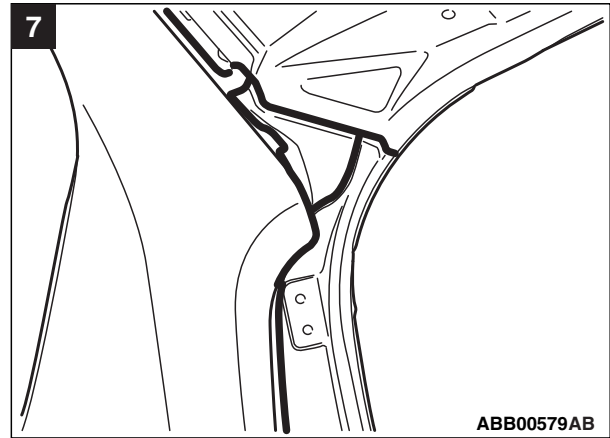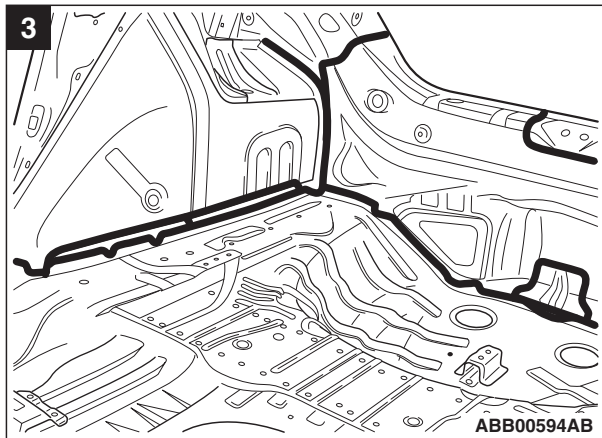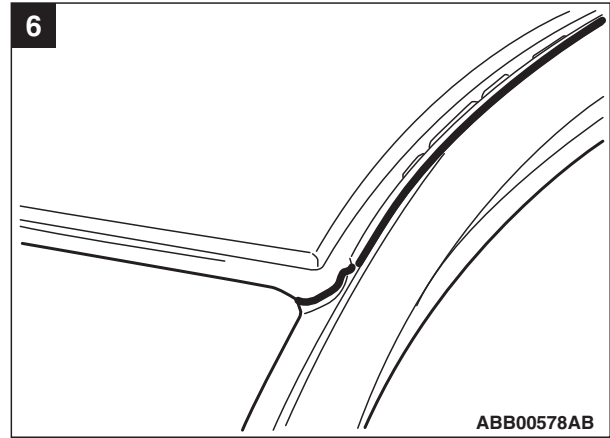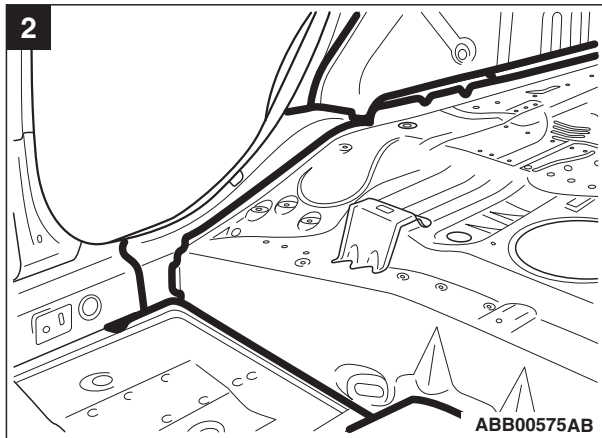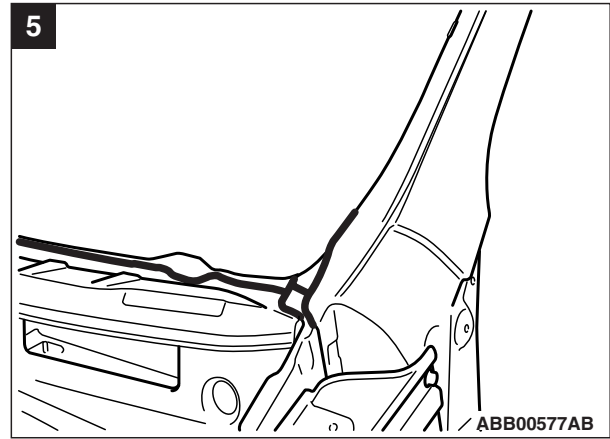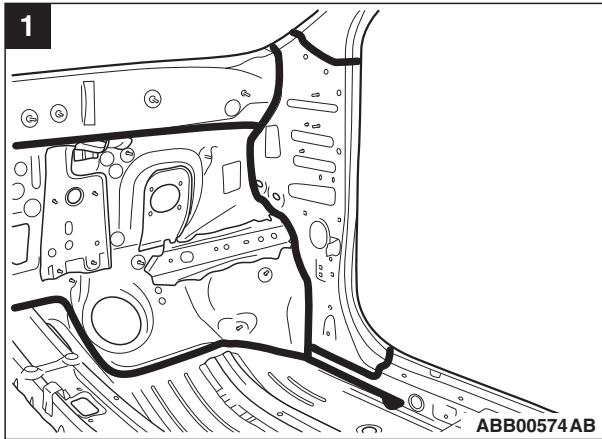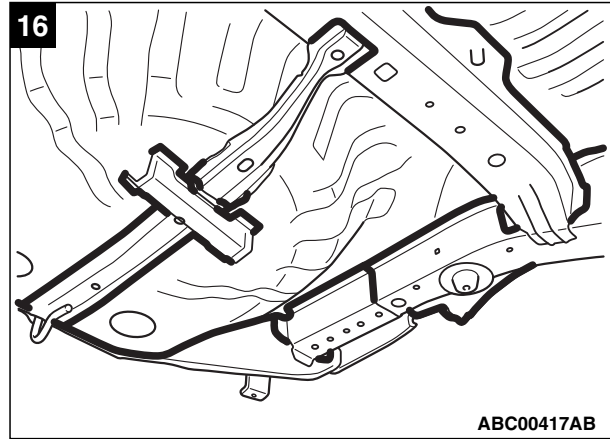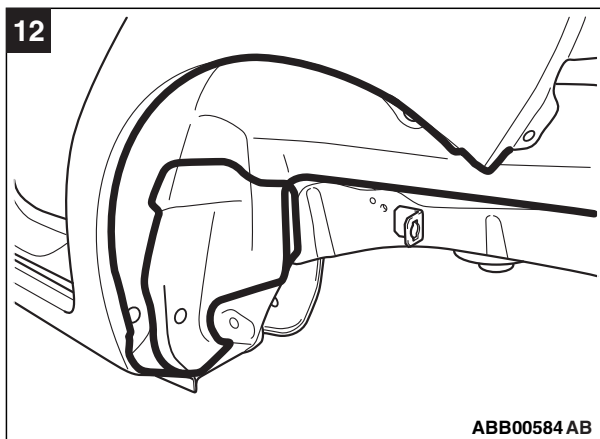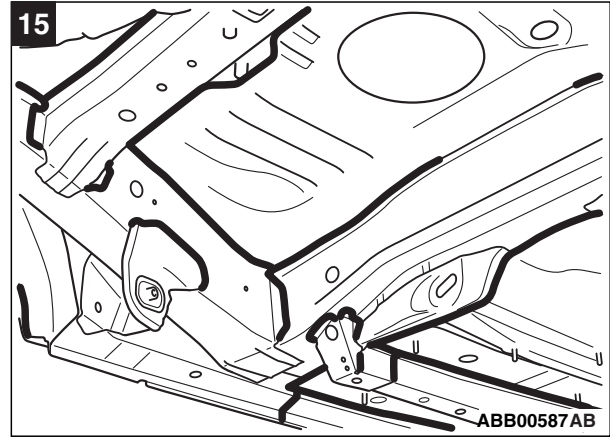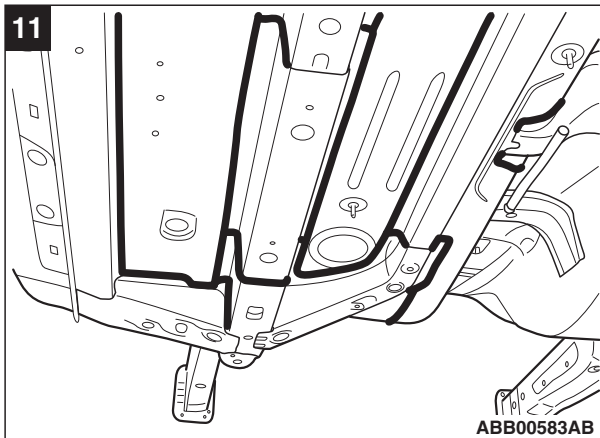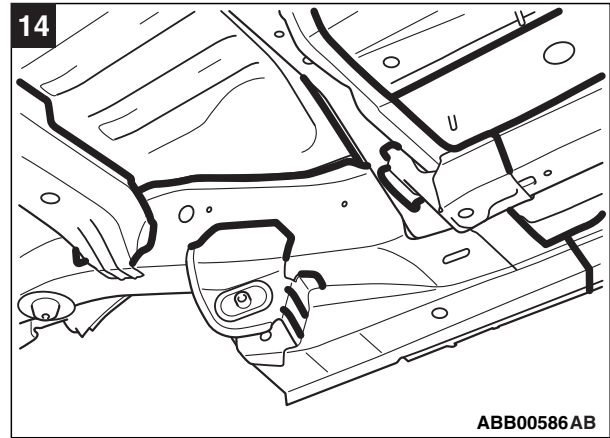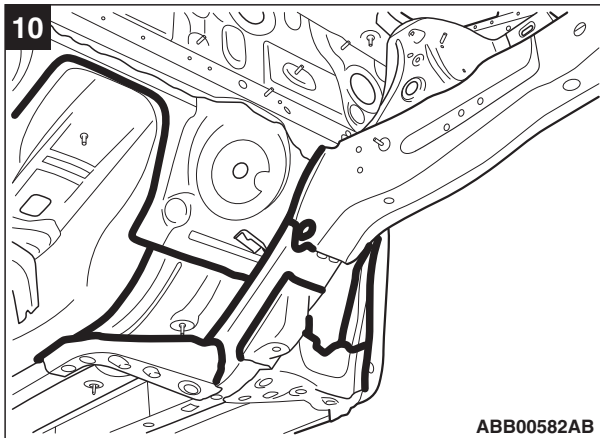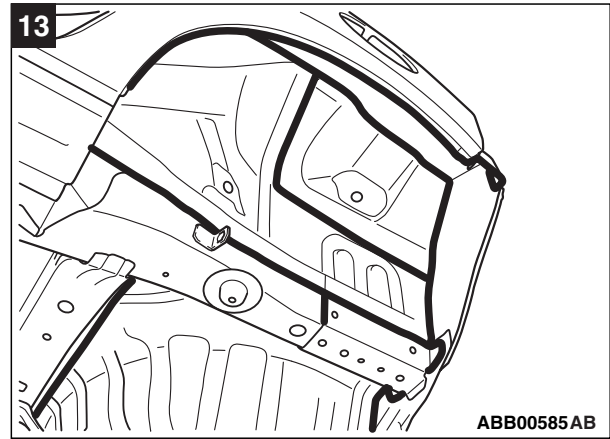

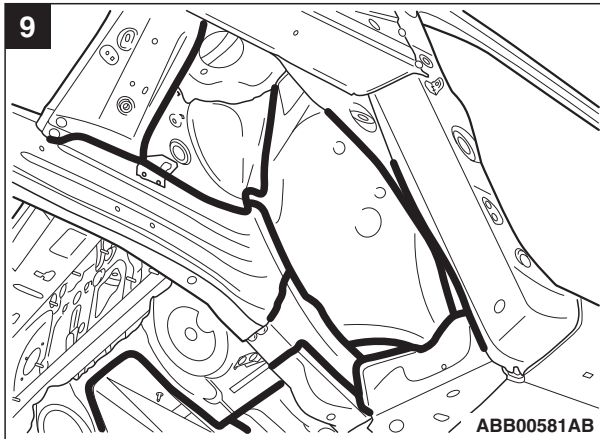

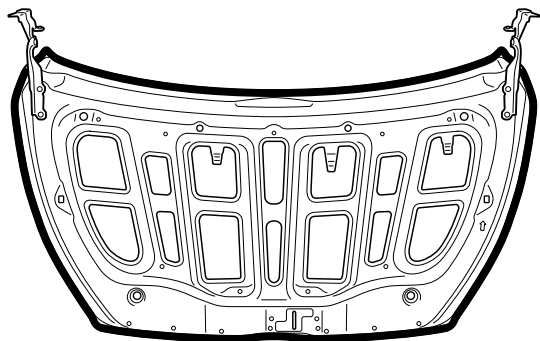
Hood

ABB00589AB

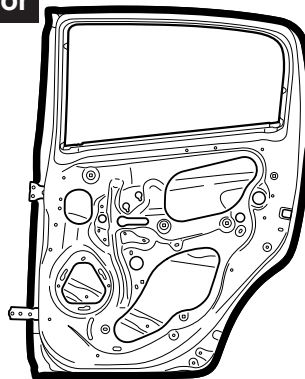
Rear door

ABB00591AB

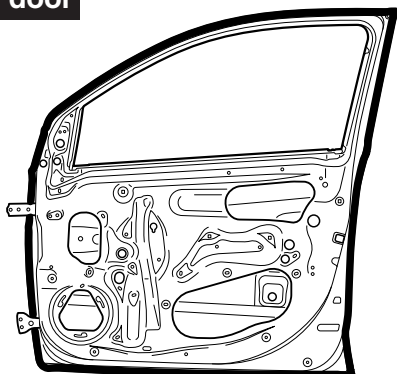
Front door

ABB00590AB



Tail gate

ABB00592AB

UNDERCOAT APPLICATION LOCATIONS

M4040003001698

- The under parts of the body is undercoated for anti-corrosive, anti-rust, anti-chipping, and anti-vibration performance.
- After correcting the body, restore as shown in the instructions of the figure, if necessary.
- To avoid splashing of undercoat material during the coating, protect the plug holes and components installation holes with masking tape.

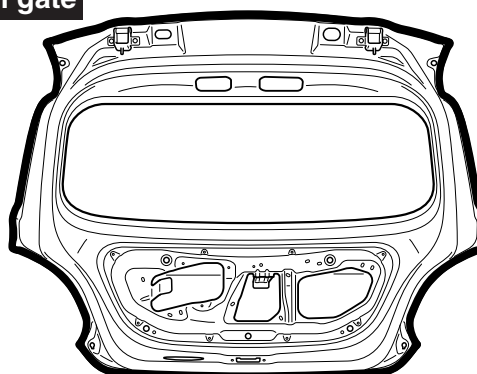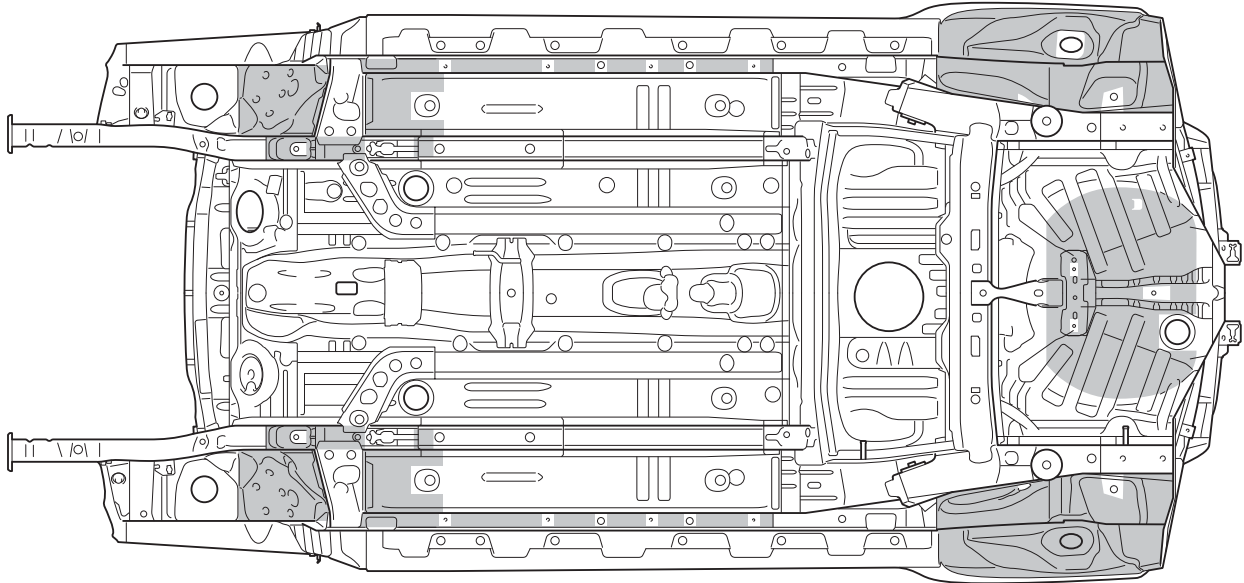

NOTE:

■ : Undercoat [film thickness is at least 0.8 mm (0.03 in)]

ABC00399AB

NOTES