


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

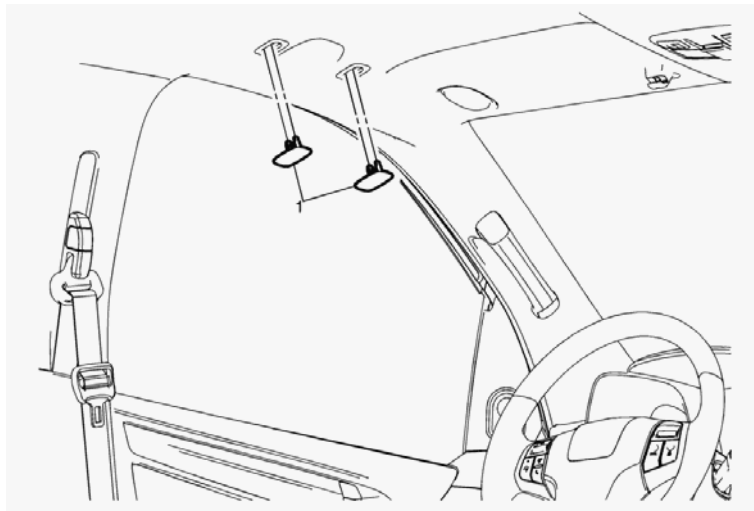

Assist Handle Bolt Cover Replacement

Callout

1

Assist Handle Bolt Cover

Procedure


Use a flat bladed plastic trim tool in order to release the assist handle bolt cover from the headliner.

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

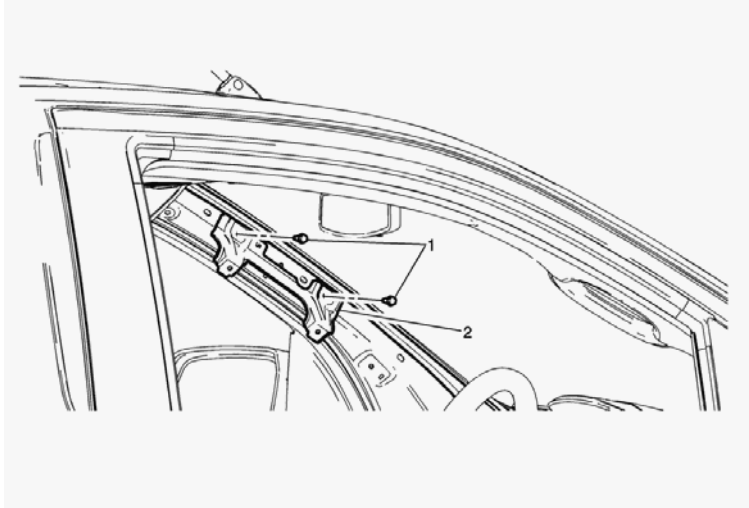

Assist Handle Bracket Replacement

Callout

Component Name

Preliminary Procedure

Remove the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement.

Assist Handle Bracket Bolt (Qty: 2)

Caution: Refer to Fastener Caution.

1

Tighten


8 Y (70 lb in)

2

Assist Handle Bracket

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

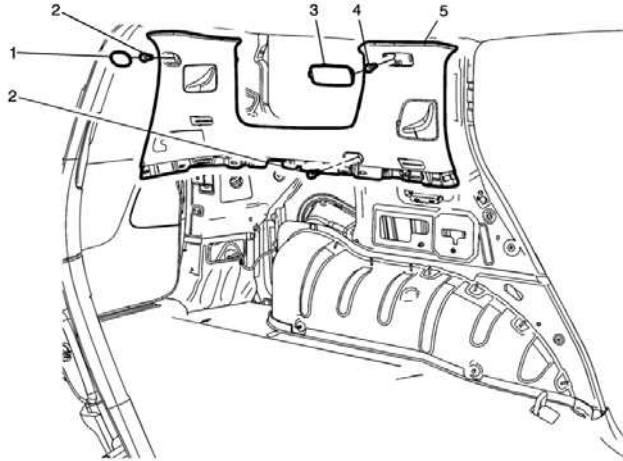

Back Body Pillar Inner Panel Trim Panel Replacement

Callout Preliminary Procedures

1. Disable the SIR system. Refer to SIR Disabling and Enabling.
2. Remove the body side trim panel. Refer to Body Side Trim Panel Replacement - Left Side or Body Side Trim Panel Replacement - Right Side.
3. Remove the rear shoulder belt. Refer to Shoulder Belt Replacement - Rear.

Component Name

- 1 Back Body Pillar Inner Panel Trim Panel Bolt Cover
- 2 Back Body Pillar Inner Panel Trim Panel Fastener (Qty: 2)
Caution: Refer to Fastener Caution.
- 3 Center Pillar Upper Trim Panel Bolt Cover
- 4 Center Pillar Upper Trim Panel Fastener


Back Body Pillar Inner Panel Trim Panel Assembly

Procedure

- 5
1. Grasp the top of the upper trim panel and gently pull the panel away from the body to release the retainers.
2. Route the rear seat retractor side belts through the openings in the back body pillar inner panel trim panel.

2013 Chevrolet Colorado

Submodel: | **Engine Type:** | **Liters:**
Fuel Delivery: | **Fuel:**

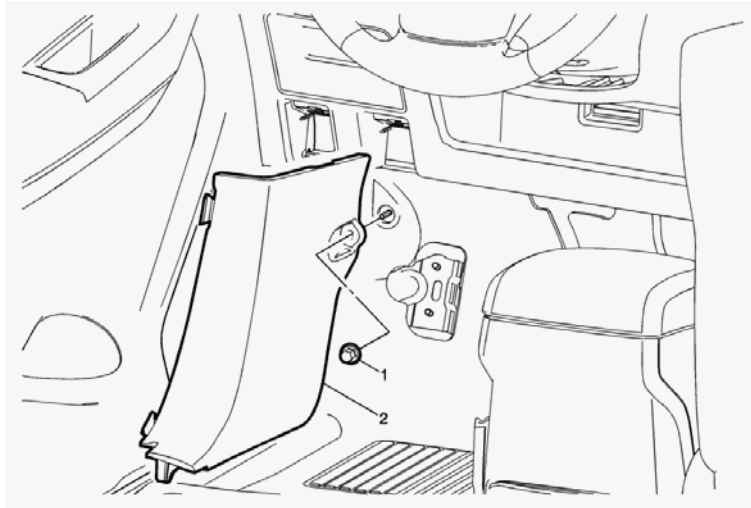

Body Hinge Pillar Trim Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the driver footrest. Refer to Driver Footrest Replacement.
2. Remove the front side door sill trim plate. Refer to Front Side Door Sill Trim Plate Replacement.

1 Body Hinge Pillar Trim Assembly Retainer

Body Hinge Pillar Trim Assembly


Procedures

2

1. Grasp the body hinge pillar trim panel and gently pull the panel away from the body to release the fasteners.
2. Slide the panel forward so the panel unhooks from around the front door frame.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

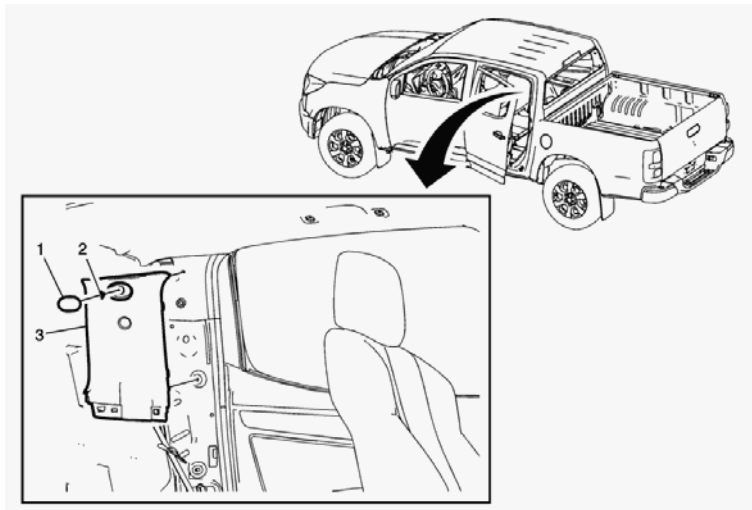

Body Lock Pillar Upper Trim Panel Replacement

Callout

Component Name

Preliminary Procedures

1. Disable the SIR system. Refer to SIR Disabling and Enabling.
2. Remove the body side rear lower trim panel. Refer to Body Side Rear Lower Trim Panel Replacement.
3. Remove the upper guide fastener for the rear shoulder belt. Refer to Shoulder Belt Replacement - Rear.

1 Body Lock Pillar Garnish Molding Plug

2 Body Lock Pillar Garnish Molding Fastener

Caution: Refer to Fastener Caution.

Body Lock Pillar Upper Trim Panel Assembly


Procedure

3

1. Grasp the top of the upper trim panel and gently pull the panel away from the body to release the retainers.
2. Route the rear seat retractor side belt through the opening in the body side rear lower trim panel.

2013 Chevrolet Colorado

Submodel: | **Engine Type:** | **Liters:**
Fuel Delivery: | **Fuel:**

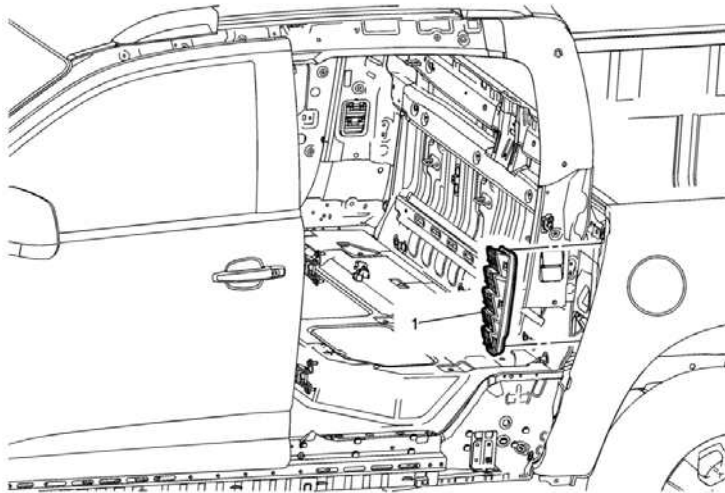

Body Rear Outer Panel Pressure Relief Valve Replacement


Callout

Preliminary Procedures

1. Remove the rear bumper impact bar. Refer to Rear Bumper Impact Bar Replacement.
2. Slide the pickup box back to access the body rear outer pressure relief valve. Refer to Pickup Box Replacement.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

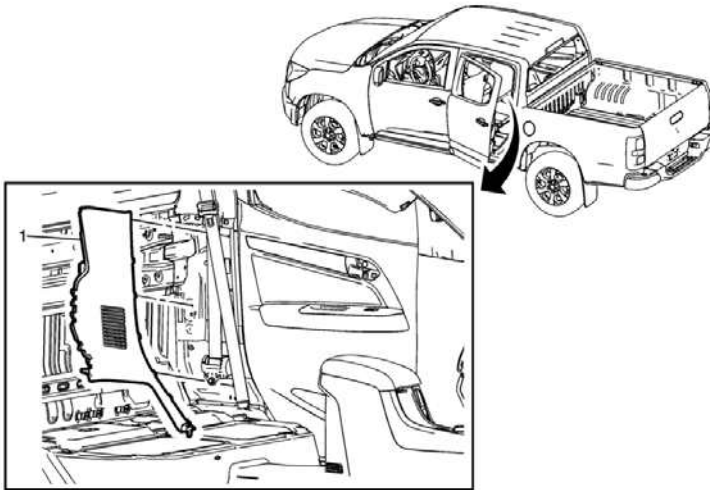

Body Side Rear Lower Trim Panel Replacement

Callout

Component Name

Preliminary Procedure

1. Remove the rear side door sill trim plate. Refer to Rear Side Door Sill Trim Plate Replacement.
2. Remove the rear end trim finish panel. Refer to Rear End Trim Finish Panel Replacement.

Body Side Rear Lower Trim Panel Assembly

Procedure

1

1. Grasp the body side rear lower trim panel and gently pull the panel away from the body to release the retainers.
2. Ensure the seat belt webbing does not become trapped during installation.
3. Slide the panel forward so the panel unhooks from around the door frame.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:



Body Side Rear Lower Trim Panel Replacement

Callout

Component Name

Preliminary Procedure

1. Remove the front side door sill trim plate. Refer to Front Side Door Sill Trim Plate Replacement.
2. Remove the rear end trim finish panel. Refer to Rear End Trim Finish Panel Replacement.

Body Side Rear Lower Trim Panel Assembly

Procedure


1

1. Grasp the body side rear lower trim panel and gently pull the panel away from the body to release the retainers.
2. Ensure the seat belt webbing does not become trapped during installation.
3. Slide the panel forward so the panel unhooks from around the door frame.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

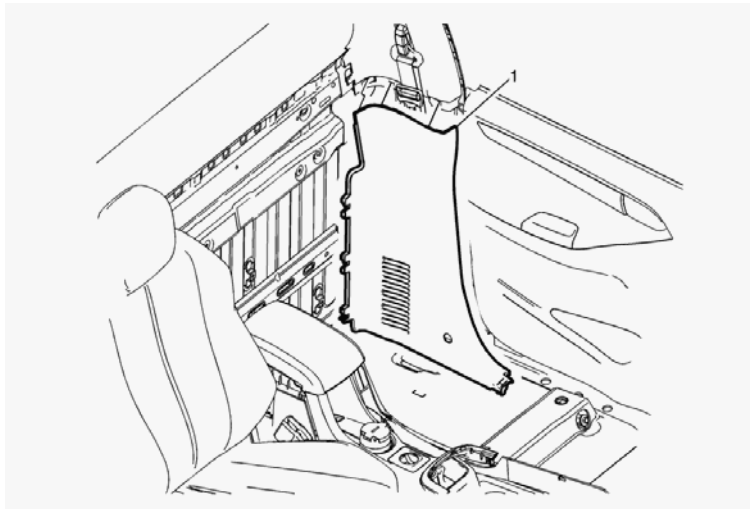

Body Side Rear Lower Trim Panel Replacement

Callout

Component Name

Preliminary Procedure

1. Remove the front side door sill trim plate. Refer to Front Side Door Sill Trim Plate Replacement.
2. Remove the rear end trim finish panel. Refer to Rear End Trim Finish Panel Replacement.
3. Remove the lower front seat shoulder belt anchor plate bolt. Refer to Seat Belt Retractor Pretensioner Replacement - Front.

Body Side Rear Lower Trim Panel Assembly

Procedure


1

1. Grasp the body side rear lower trim panel and gently pull the panel away from the body to release the retainers.
2. Ensure the seat belt webbing does not become trapped during installation.
3. Slide the panel forward so the panel unhooks from around the door frame.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

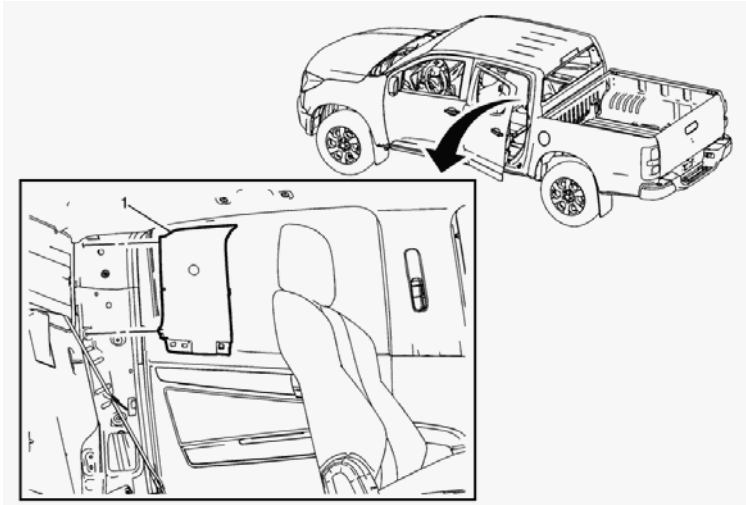

Body Side Rear Upper Trim Panel Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the body side rear lower trim panel. Refer to Body Side Rear Lower Trim Panel Replacement.
2. Remove the upper guide fastener for the rear shoulder belt. Refer to Shoulder Belt Replacement - Rear.

Body Side Rear Upper Trim Panel Assembly


Procedure

1

1. Grasp the top of the upper trim panel and gently pull the panel away from the body to release the retainers.
2. Route the rear seat retractor side belt through the opening in the body side rear lower trim panel.

2013 Chevrolet Colorado

Submodel: | **Engine Type:** | **Liters:**
Fuel Delivery: | **Fuel:**

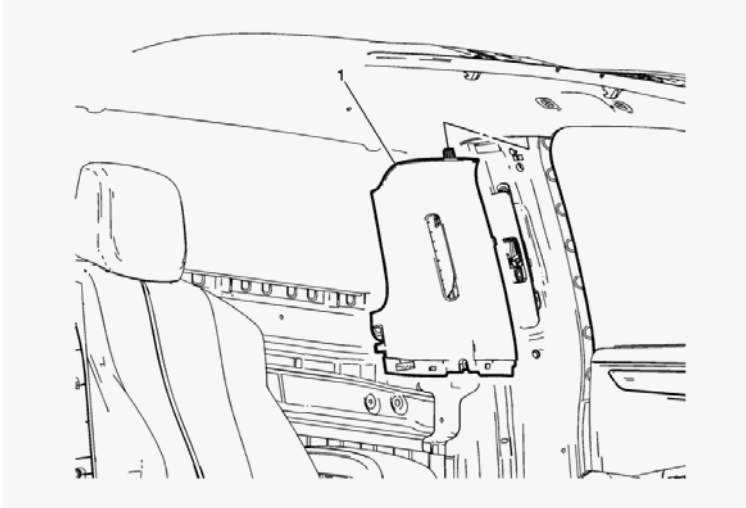

Body Side Rear Upper Trim Panel Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the body side rear lower trim panel. Refer to Body Side Rear Lower Trim Panel Replacement.
2. Remove the upper front seat shoulder belt anchor plate bolt. Refer to Seat Belt Retractor Pretensioner Replacement - Front.

Body Side Rear Upper Trim Panel Assembly

Procedure


1

1. Grasp the top of the upper trim panel and gently pull the panel away from the body to release the retainers.
2. Ensure the seat belt webbing does not become trapped during installation.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

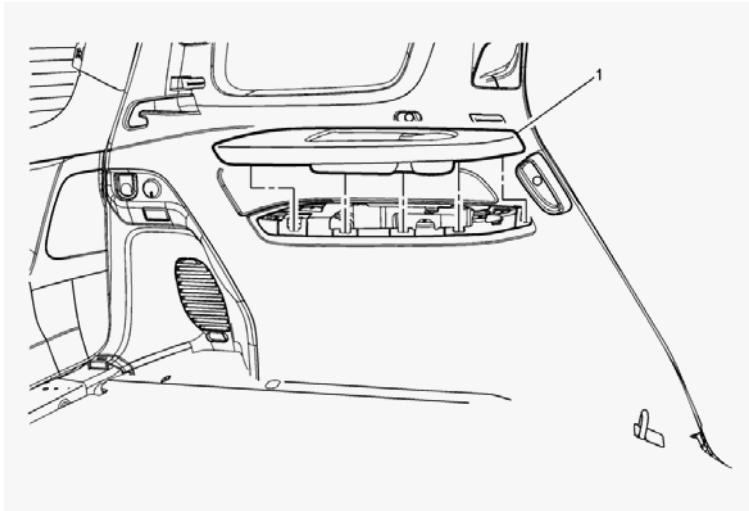

Body Side Trim Panel Armrest Replacement

Callout

1

Body Side Trim Panel Armrest Assembly


Component Name

Procedure

Use the appropriate trim tool to release the body side trim panel armrest clips from the body side trim panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

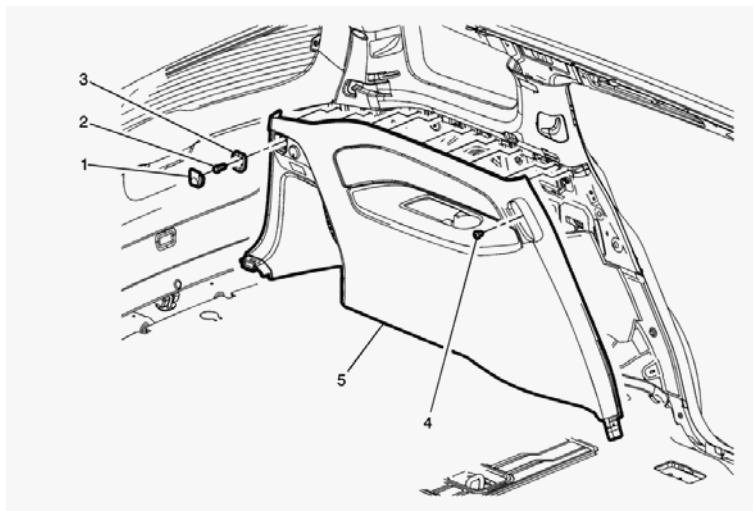


Body Side Trim Panel Replacement - Left Side

Callout	Component Name
Preliminary Procedures	
1.	Move the rear seat to the full forward position.
2.	Remove the 3rd row seat. Refer to 3rd Row Seat Removal and Installation.
3.	Remove the rear side door sill trim plate. Refer to Rear Side Door Sill Trim Plate Replacement.
4.	Remove the rear end trim finish panel. Refer to Rear End Trim Finish Panel Replacement.
1	Cargo Tie Down Loop Bolt Cap
2	Cargo Tie Down Loop Fastener Caution: Refer to Fastener Caution.
3	Cargo Tie Down Loop Assembly
4	Body Side Trim Panel Fastener
	Body Side Trim Panel – Left Side Assembly
Procedure	
5	1. Pull outward to disengage the trim panel retainers. 2. Disconnect the electrical connectors.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

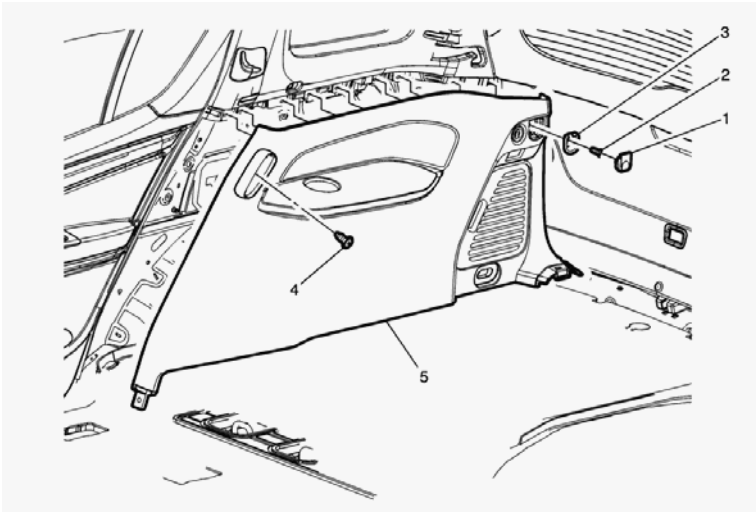

Body Side Trim Panel Replacement - Right Side

Callout	Component Name
Preliminary Procedures	

1. Move the rear seat to the full forward position.
2. Remove the 3rd row seat. Refer to 3rd Row Seat Removal and Installation.
3. Remove the rear side door sill trim plate. Refer to Rear Side Door Sill Trim Plate Replacement.
4. Remove the rear end trim finish panel. Refer to Rear End Trim Finish Panel Replacement.


- | | |
|---|--|
| 1 | Cargo Tie Down Loop Bolt Cap |
| 2 | Cargo Tie Down Loop Fastener |
| 3 | Cargo Tie Down Loop Assembly |
| 4 | Body Side Trim Panel Fastener |
| | Body Side Trim Panel – Right Side Assembly |

Procedure

- | | |
|---|---|
| 5 | <ol style="list-style-type: none">1. Pull outward to disengage the trim panel retainers.2. Disconnect the electrical connectors. |
|---|---|

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

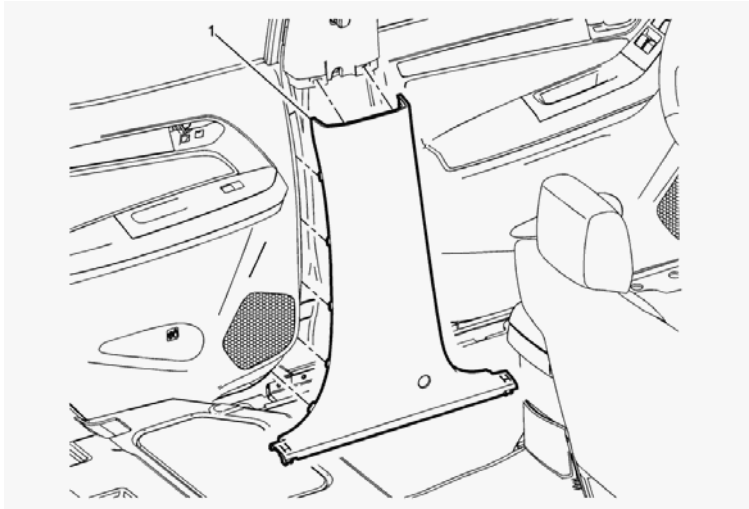

Center Pillar Lower Trim Panel Replacement

Callout

Preliminary Procedure

1. Remove the front side door sill trim plate. Refer to Front Side Door Sill Trim Plate Replacement.
2. Remove the rear side door sill trim plate. Refer to Rear Side Door Sill Trim Plate Replacement.
3. Remove the lower seat belt fastener. Refer to Seat Belt Retractor Pretensioner Replacement - Front.
4. Move seat to full forward position.

Center Pillar Lower Trim Panel Assembly

1


Procedure

Ensure the seat belt webbing does not become trapped during installation.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

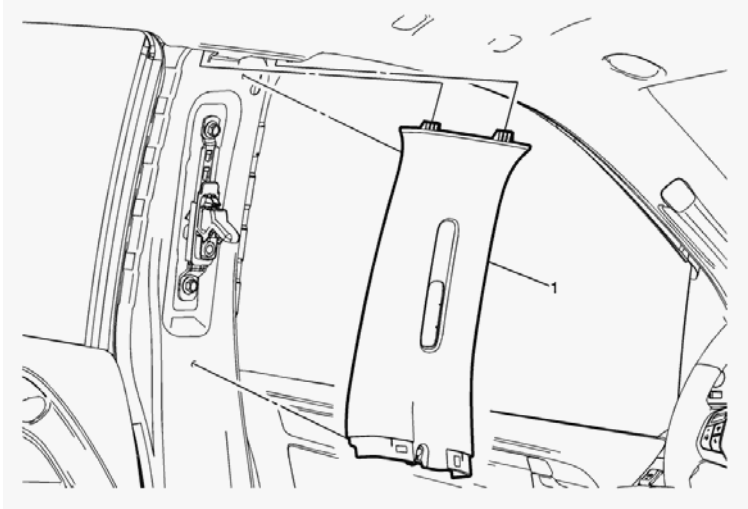

Center Pillar Upper Trim Panel Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the center pillar lower trim panel. Refer to Center Pillar Lower Trim Panel Replacement.
2. Remove the seat belt retractor pretensioner. Refer to Seat Belt Retractor Pretensioner Replacement - Front.
3. Move the seat to the full forward position.

Center Pillar Upper Trim Panel Assembly

1


Procedure

When replacing the center pillar upper trim panel, feed the seat belt through the panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

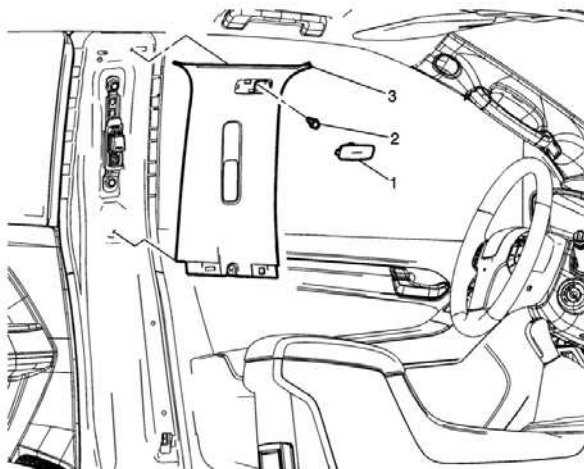

Center Pillar Upper Trim Panel Replacement

Callout

Component Name

Preliminary Procedures

1. Disable the SIR system. Refer to SIR Disabling and Enabling.
2. Remove the center pillar lower trim panel. Refer to Center Pillar Lower Trim Panel Replacement.
3. Remove the seat belt retractor pretensioner. Refer to Seat Belt Retractor Pretensioner Replacement - Front.
4. Move the seat to the full forward position.

1 Center Pillar Upper Trim Panel Upper Cover

2 Center Pillar Upper Trim Panel Fastener

Caution: Refer to Fastener Caution.

Center Pillar Upper Trim Panel Assembly


3 **Procedure**

When replacing the center pillar upper trim panel, feed the seat belt through the panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

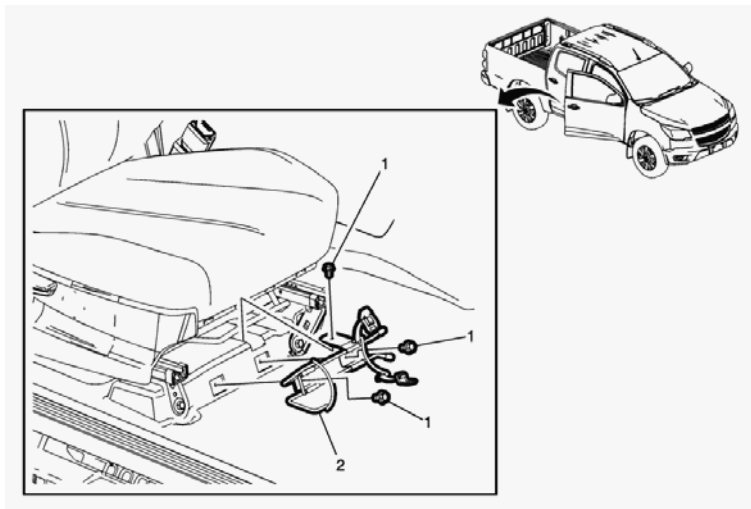

Fire Extinguisher Bracket Replacement

Callout

Component Name

Fire Extinguisher Bracket Fastener (Qty: 3)

Caution: Refer to Fastener Caution.

Procedure

1

1. Remove the fire extinguisher from the bracket to access fasteners.
2. Pull back the carpet strip to access the top fastener.

Tighten


11 Y (97 lb in)

2

Fire Extinguisher Bracket Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

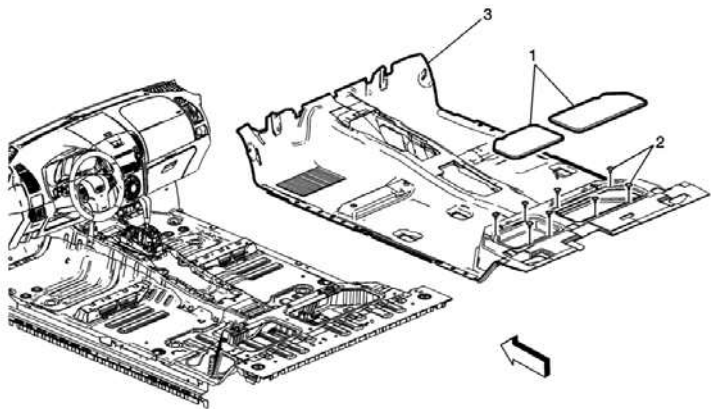


Floor Panel Carpet Replacement

Callout	Component Name
Preliminary Procedures	
1. Remove front seats. Refer to Driver or Passenger Seat Removal and Installation.	
2. Remove the rear seat. Refer to Rear Seat Removal and Installation.	
3. Remove the front floor console. Refer to Front Floor Console Replacement.	
4. Remove the body hinge pillar trim. Refer to Body Hinge Pillar Trim Replacement.	
5. Remove the front side door sill trim plate. Refer to Front Side Door Sill Trim Plate Replacement.	
6. Remove the rear side door sill trim plate. Refer to Rear Side Door Sill Trim Plate Replacement.	
7. Remove the center pillar lower trim panel. Refer to Center Pillar Lower Trim Panel Replacement.	
8. Remove the body side rear lower trim panel. Refer to Body Side Rear Lower Trim Panel Replacement.	
9. Remove the fire extinguisher bracket. Refer to Fire Extinguisher Bracket Replacement.	
1	Carpet Lid Assembly
	Front Floor Auxiliary Mat Lower Retainer (Qty: 8)
2	Procedure Use the appropriate trim tool to aid in the removal.
3	Front Floor Panel Carpet Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

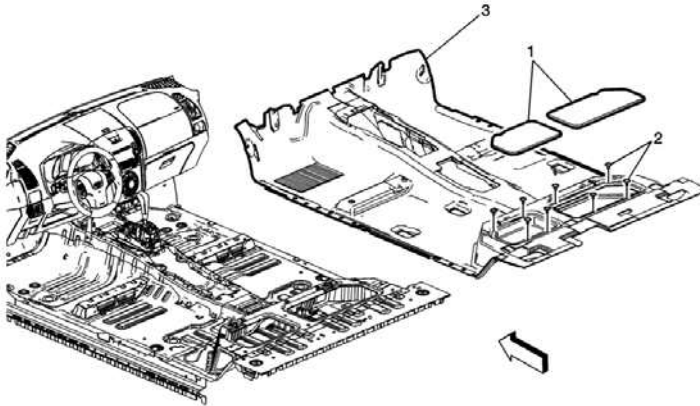

Floor Panel Carpet Replacement

Callout Preliminary Procedures

Component Name

1. Remove front seats. Refer to Driver or Passenger Seat Removal and Installation.
2. Remove the rear seat cushion, if equipped. Refer to Rear Seat Cushion Removal and Installation.
3. Remove the front floor console. Refer to Front Floor Console Replacement.
4. Remove the body hinge pillar trim. Refer to Body Hinge Pillar Trim Replacement.
5. Remove the fire extinguisher bracket. Refer to Fire Extinguisher Bracket Replacement.

- 1 Carpet Lid Assembly
Front Floor Auxiliary Mat Lower Retainer (Qty: 8)


- 2 **Procedure**
Use the appropriate trim tool to aid in the removal.

- 3 Front Floor Panel Carpet Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

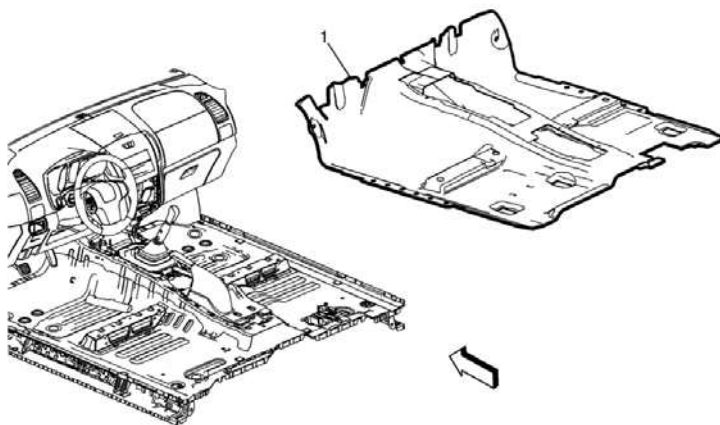

Floor Panel Carpet Replacement

Callout Preliminary Procedures

Component Name

1. Remove front seats. Refer to Driver or Passenger Seat Removal and Installation.
2. Remove the front floor console, if equipped. Refer to Front Floor Console Replacement.
3. Remove the instrument panel lower extension, if equipped. Refer to Instrument Panel Lower Extension Replacement.
4. Remove the body hinge pillar trim. Refer to Body Hinge Pillar Trim Replacement.
5. Remove the fire extinguisher bracket, if equipped. Refer to Fire Extinguisher Bracket Replacement.

2013 Chevrolet Colorado

Submodel: | **Engine Type:** | **Liters:**
Fuel Delivery: | **Fuel:**

If the carpet or the pad or insulator is wet, use the following criteria for drying or for replacing the components:

- For a 1-piece carpet assembly bonded to a cotton or a fiber padding, replace the entire assembly.
- For a 2-piece carpet assembly with a cotton or a fiber padding, replace the padding only. While the carpet is out of the vehicle, dry the carpet using the method described below.
- For a 1-piece carpet assembly bonded to a foam padding or attached to a synthetic padding, dry the carpet using the method described below.
- For a 2-piece carpet assembly with a synthetic padding, dry the assembly using the method described below.


Drying Method

1. If you observe puddles of liquid on the carpet face, use a wet vacuum to remove the excess moisture.
2. Blot the face of the carpet with a towel in order to absorb as much moisture as possible.
3. Point a fan at the affected area and air dry the carpet.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

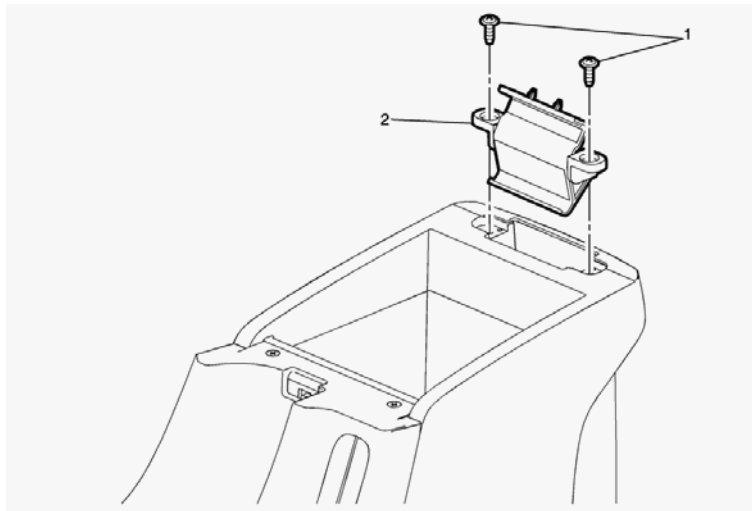

Front Floor Console Armrest Hinge Replacement

Callout

Component Name

Preliminary Procedure

Remove the front floor console armrest. Refer to Front Floor Console Armrest Replacement.


1 Front Floor Console Armrest Hinge Bolt (Qty: 2)

Caution: Refer to Fastener Caution.

2 Front Floor Console Armrest Hinge

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

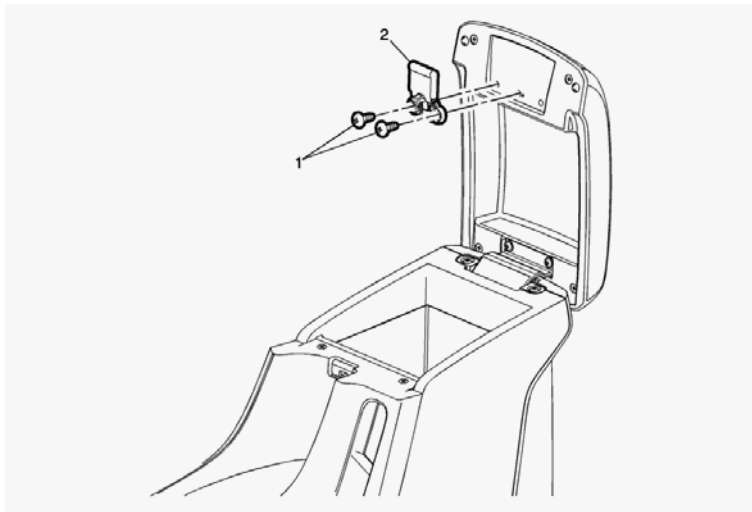

Front Floor Console Armrest Latch Replacement

Callout


- 1 Front Floor Console Armrest Bolt (Qty: 2)
Caution: Refer to Fastener Caution.
- 2 Front Floor Console Armrest Latch

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

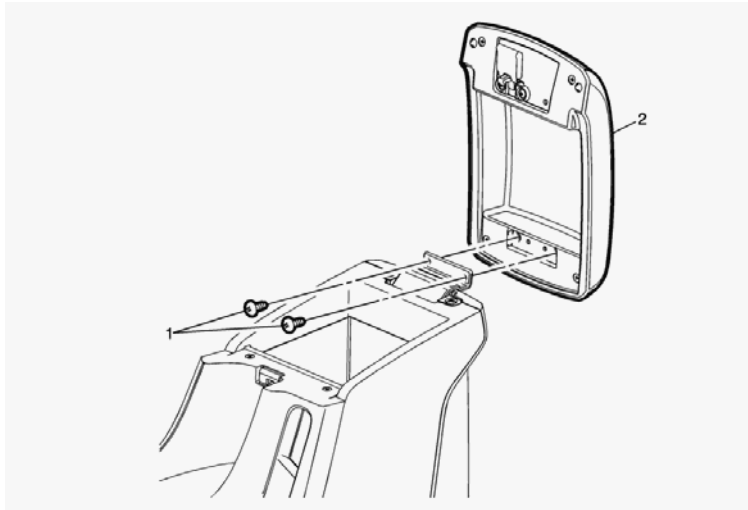

Front Floor Console Armrest Replacement


Callout

Component Name

- | | |
|---|---|
| 1 | Front Floor Console Armrest Bolt (Qty: 2)
Caution: Refer to Fastener Caution. |
| 2 | Front Floor Console Armrest Assembly |

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

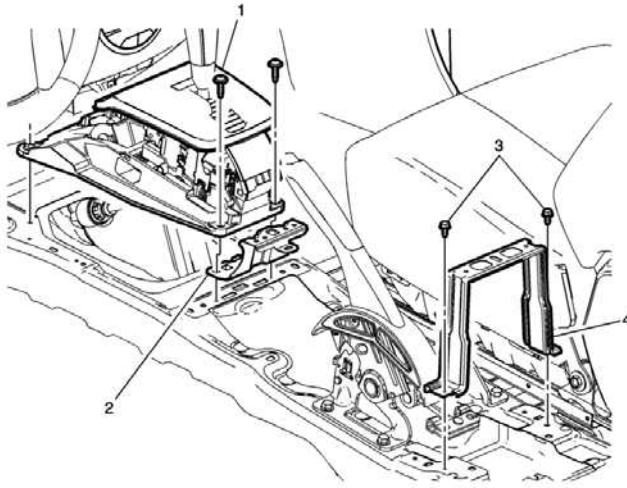

Front Floor Console Bracket Replacement

Callout


Component Name

- | | |
|---|--|
| | Transmission Control |
| 1 | Note: Only remove the transmission control fasteners. Transmission control does not need to be removed from the vehicle. Refer to Transmission Control Replacement. |
| 2 | Front Floor Console Front Bracket |
| | Front Floor Console Rear Bracket Bolt (Qty: 2) |
| 3 | Caution: Refer to Fastener Caution. |
| | Tighten |
| | 8 Y (71 lb in) |
| 4 | Front Floor Console Rear Bracket |

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

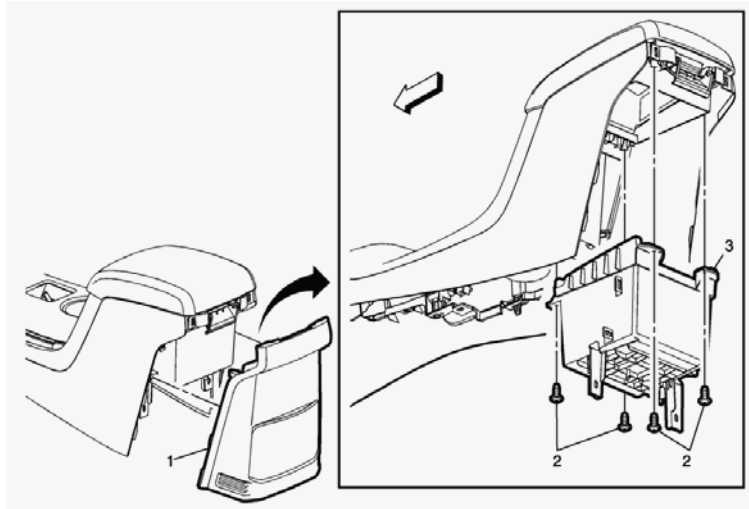

Front Floor Console Compartment Replacement

Callout

1

Front Floor Console Rear Cover
Refer to Front Floor Console Rear Cover Replacement.

2

Front Floor Console Compartment Fastener (Qty: 4)
Caution: Refer to Fastener Caution.

3


Front Floor Console Compartment
Procedure
Disconnect electrical connections, if applicable.

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

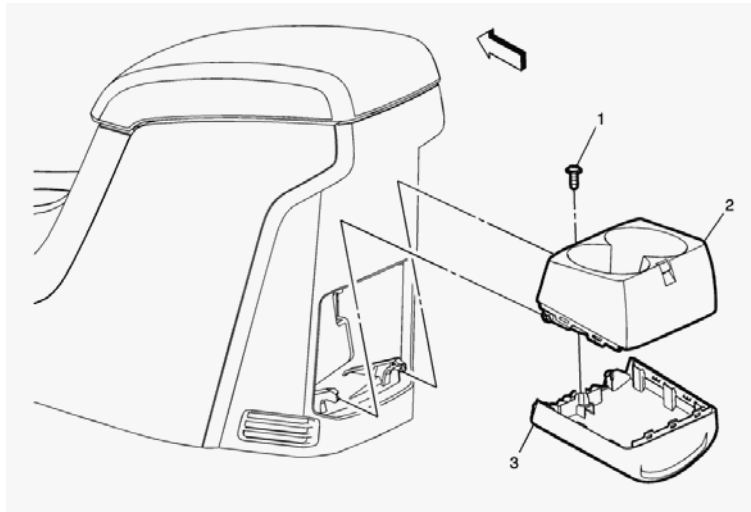

Front Floor Console Cup Holder Door Replacement


Callout

- | | |
|---|--|
| 1 | Front Floor Console Cup Holder Bolt |
| | Caution: Refer to Fastener Caution. |
| 2 | Front Floor Console Cup Holder Insert |
| 3 | Front Floor Console Cup Holder Door |

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

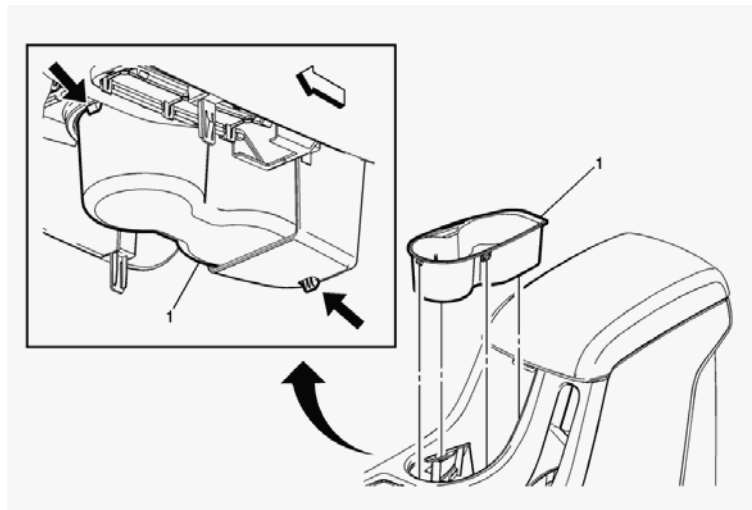

Front Floor Console Cup Holder Housing Replacement

Callout

1

Front Floor Console Cup Holder Housing

Procedure


Release the cup holder housing from the front floor console assembly.

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

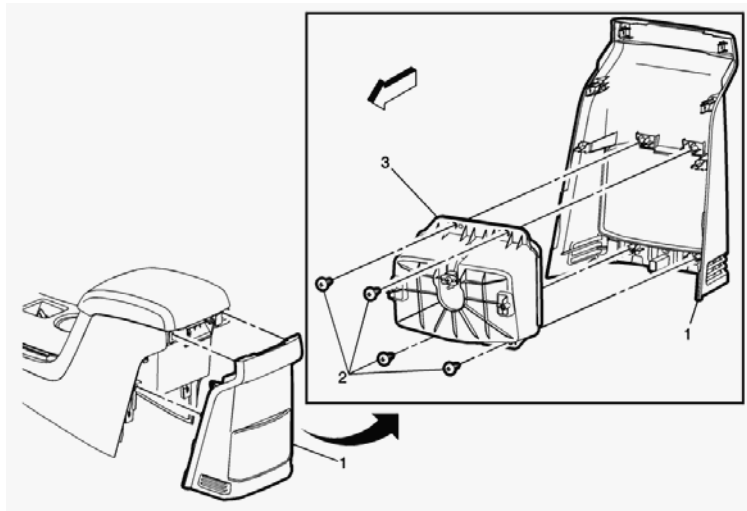

Front Floor Console Cup Holder Replacement

Callout

1

Front Floor Console Rear Cover
Refer to Front Floor Console Rear Cover Replacement.

2

Front Floor Console Cup Holder Fastener (Qty: 4)
Caution: Refer to Fastener Caution.

3


Front Floor Console Cup Holder Assembly

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

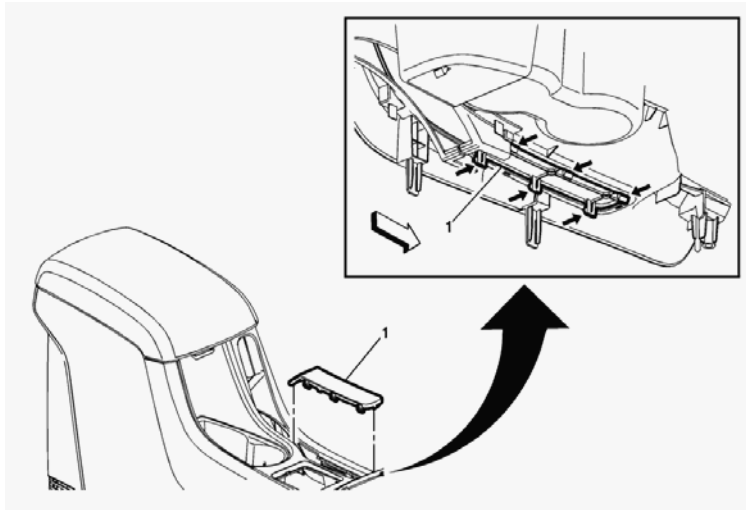

Front Floor Console Parking Brake Lever Opening Cover Replacement

Callout

1

Component Name


Front Floor Console Parking Brake Lever Opening Cover

Procedure

Pull up the parking brake lever opening cover to release the tabs.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

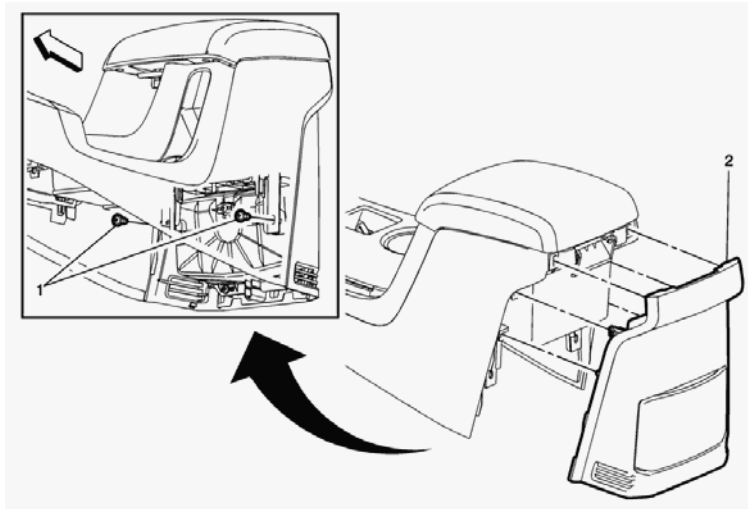

Front Floor Console Rear Cover Replacement

Callout

Component Name

Preliminary Procedure

Remove the front floor console. Refer to Front Floor Console Replacement.

- 1 Front Floor Console Cover Bolt (Qty: 2)
Caution: Refer to Fastener Caution.

Front Floor Console Rear Cover

- 2 **Procedure**

Use a flat bladed plastic trim tool in order to release the retainers securing the rear cover to the front floor console assembly.


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:


Fuel Delivery: | Fuel:

Removal Procedure

1. Remove the front floor console transmission shift opening bezel. Refer to Front Floor Console Transmission Shift Opening Bezel Repl.
2. Move the front seats to the full rear position to access the front floor console fasteners.

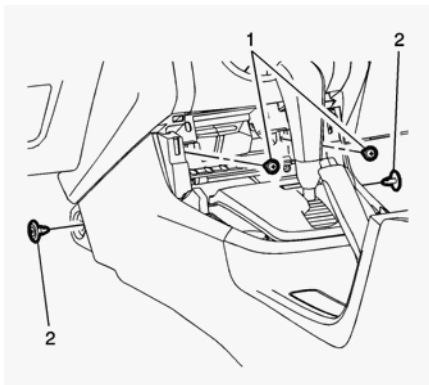


3. Remove the 2 fasteners (1) securing the front floor console assembly to the instrument panel tie bar assembly.
4. Remove the 2 retainers (2) securing the front floor console assembly to the instrument panel center bracket.

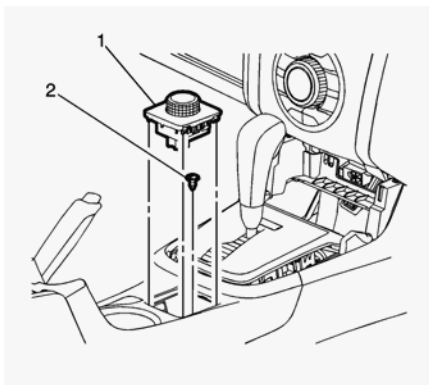

5. Release the retainer tabs securing the front floor console front cover (1) to the front floor console assembly.
6. If applicable, disconnect the electrical connection.
7. Remove the retainer (2) securing the front floor console assembly to the front floor console bracket.




8. Remove the 2 fasteners (1) securing the front floor console assembly to the front floor console rear bracket.

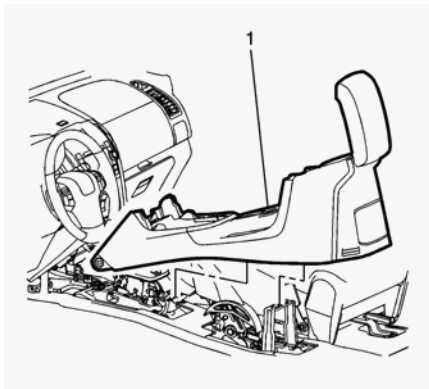

9. Note the location and routing of the instrument panel console harness assembly, to ensure proper reinstallation.
10. Disconnect the electrical connections.
11. Remove the front floor console assembly (1) from the vehicle.

Installation Procedure

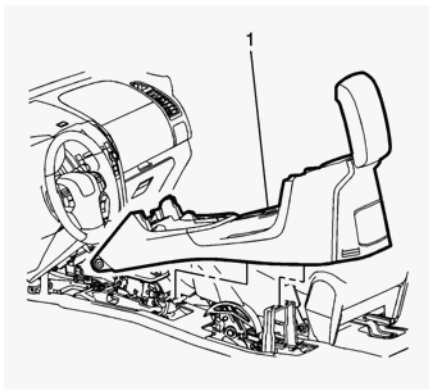


1. Position the front floor console assembly (1) to the front floor console brackets.
2. Reposition the instrument panel console harness to the front floor console assembly (1) as was noted in the removal process and connect electrical connections.




Caution: Refer to Fastener Caution.

3. Install the 2 fasteners (1) securing the front floor console assembly to the front floor console rear bracket and tighten to 8 Y (71 lb in).

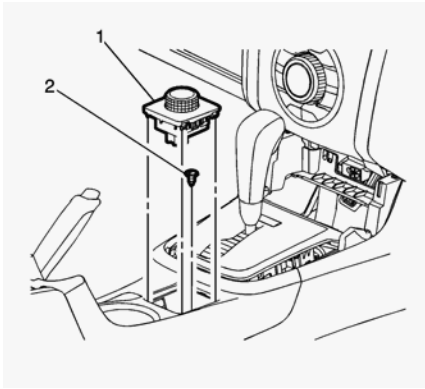


4. Install the retainer (2) securing the front floor console assembly to the front floor console bracket.
5. If applicable, connect the electrical connection.
6. Install the front floor console front cover (1) to the front floor console assembly.

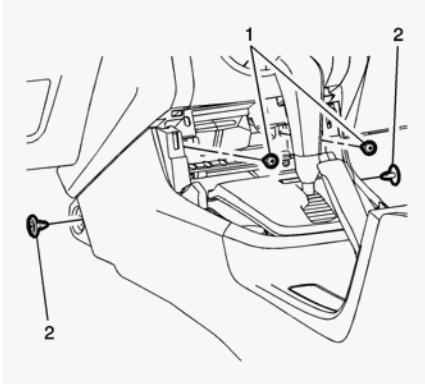

7. Install the 2 fasteners (1) securing the front floor console assembly to the instrument panel tie bar assembly.
8. Install the 2 retainers (2) securing the front floor console assembly to the instrument panel center bracket.
9. Install the front floor console transmission shift opening bezel. Refer to Front Floor Console Transmission Shift Opening Bezel Replac

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

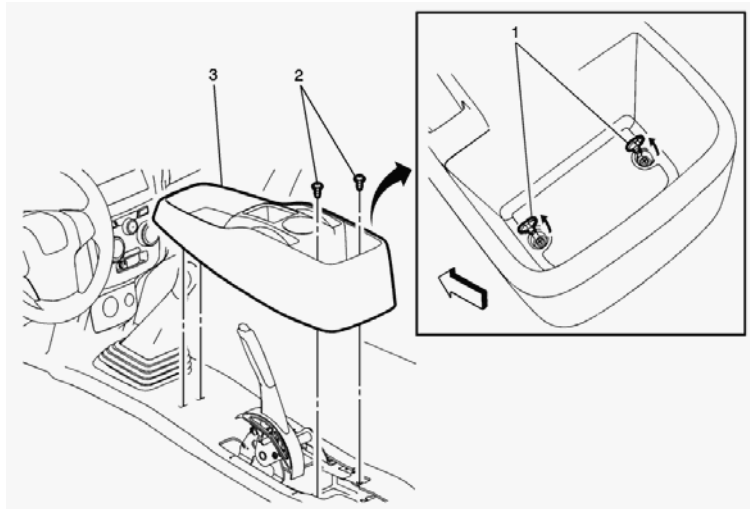

Front Floor Console Replacement

Callout

1 Front Floor Console Bolt Access Hole Cover

Front Floor Console Bolt (Qty: 2)

2 **Caution:** Refer to Fastener Caution.

Tighten


4 Y (35 lb in)

3 Front Floor Console Assembly

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

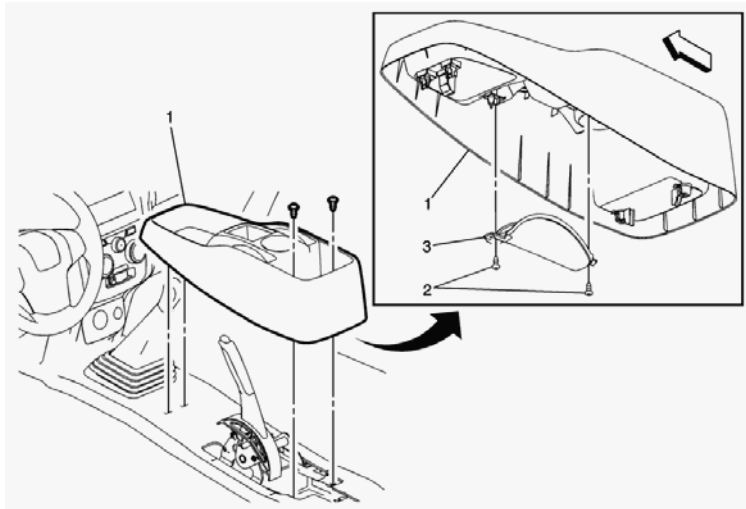

Front Floor Console Stowage Tray Replacement

Callout


- 1 Front Floor Console Assembly
Refer to Front Floor Console Replacement.
- 2 Front Floor Console Stowage Tray Bolt (Qty: 2)
Caution: Refer to Fastener Caution.
- 3 Front Floor Console Stowage Tray

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

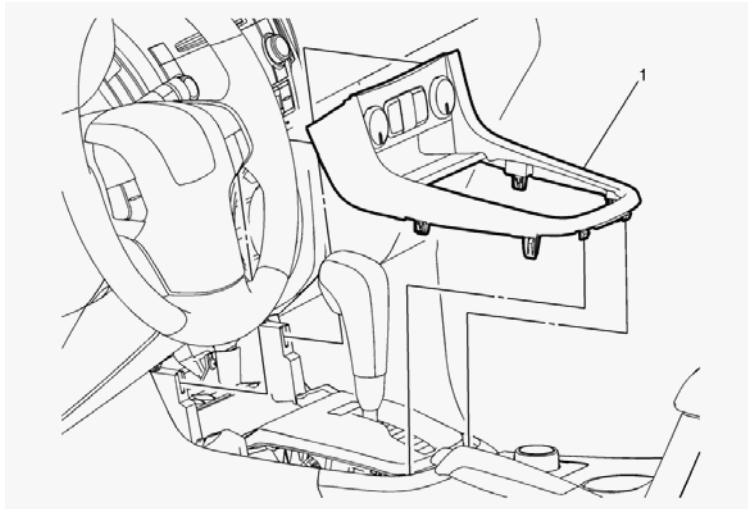

Front Floor Console Transmission Shift Opening Bezel Replacement

Callout

Component Name

Front Floor Console Transmission Shift Opening Bezel

Procedure


1

1. Use a flat bladed plastic trim tool in order to release the 8 retainers securing the front floor console transmission shift opening bezel to the front floor console assembly.
2. Disconnect the electrical connections.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

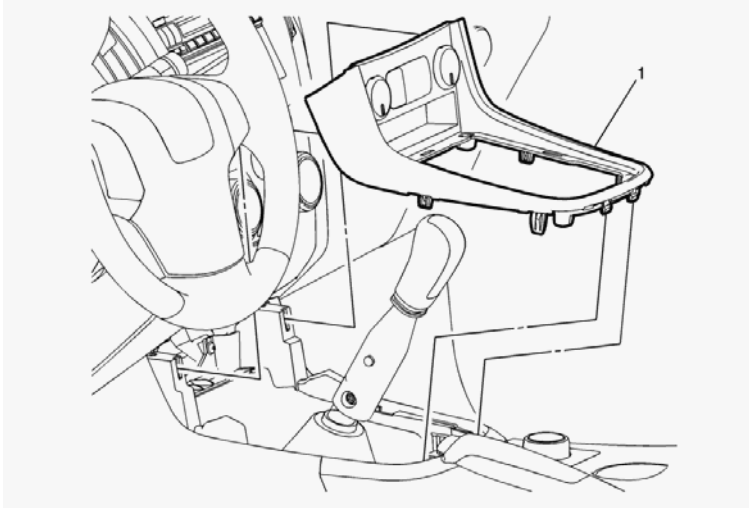

Front Floor Console Transmission Shift Opening Bezel Replacement

Callout

Component Name

Preliminary Procedure

Remove the transmission control lever boot. Refer to Transmission Control Lever Boot Replacement.

Front Floor Console Transmission Shift Opening Bezel

Procedure


1

1. Use a flat bladed plastic trim tool in order to release the 8 retainers securing the front floor console transmission shift opening bezel to the front floor console assembly.
2. Disconnect the electrical connections.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

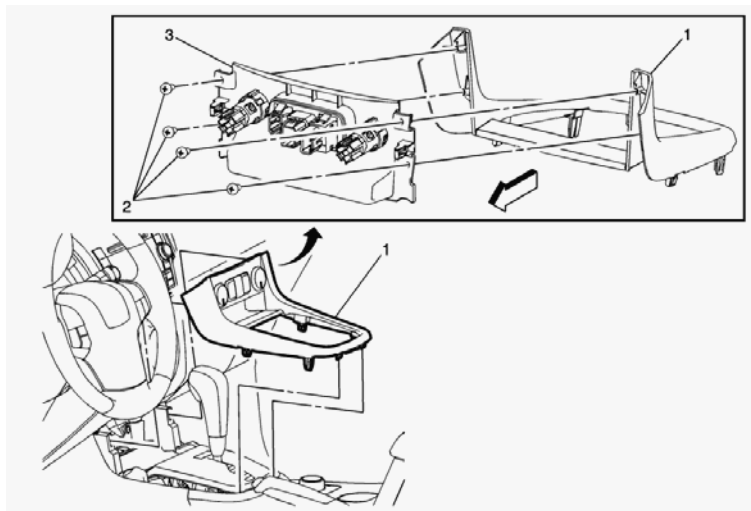

Front Floor Console Trim Plate Replacement

Callout

Component Name

- | | |
|---|--|
| 1 | Front Floor Console Transmission Shift Opening Bezel
Refer to Front Floor Console Transmission Shift Opening Bezel Replacement. |
| 2 | Front Floor Console Trim Plate Fastener (Qty: 4)
Caution: Refer to Fastener Caution. |
| 3 | Front Floor Console Trim Plate |

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

Installation Instructions Part Number


92269440

Kit Contents

Qty	Description
1	Mat – Left
1	Mat – Right
4	Mat fixing
1	Instruction

Tools Required

- Marker pen
- Tape Measure
- Knife
- Phillips Head Screwdriver

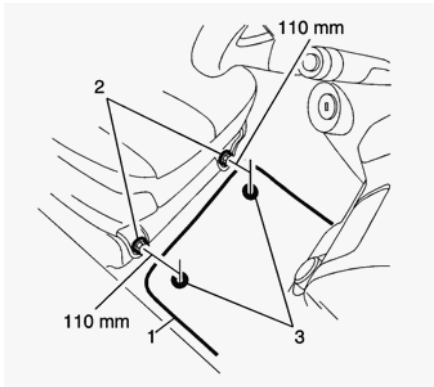


1. Position the floor mat (1) by measuring 110mm from the centre of the floor mat retainer holes (3) to the top of the head of the front seat retainers (3).
2. Ensure the mat is parallel with the side of the vehicle.
3. Mark the centre of the floor mat holes on the vehicle carpet.
4. Make a small incision in the carpet at the points marked.
5. Screw the mat retainer into the carpet.
6. Install the floor mats.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

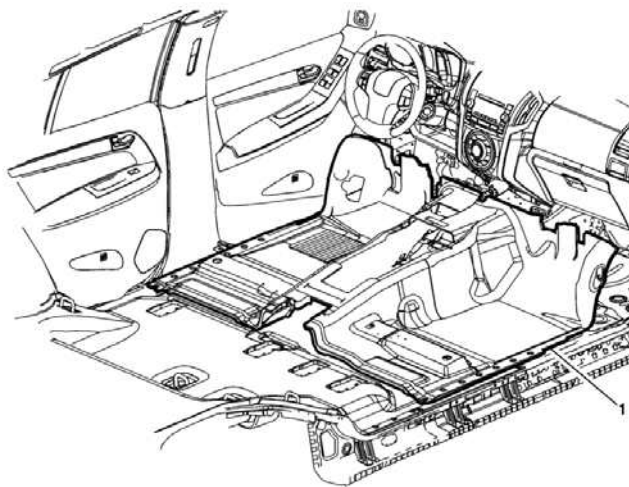

Front Floor Panel Carpet Replacement

Callout Preliminary Procedures


Component Name

1. Remove the front seats. Refer to Driver or Passenger Seat Removal and Installation.
2. Remove the front floor console. Refer to Front Floor Console Replacement.
3. Remove the body hinge pillar trim. Refer to Body Hinge Pillar Trim Replacement.
4. Remove the fire extinguisher bracket, if equipped. Refer to Fire Extinguisher Bracket Replacement.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

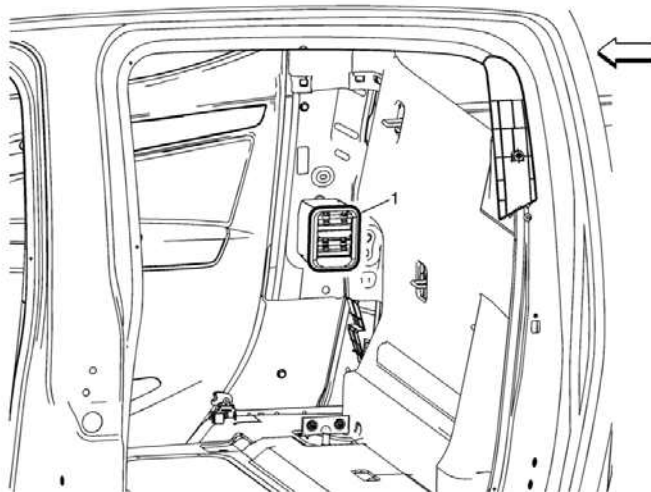

Front Side Door Pressure Relief Valve Replacement

Callout

Component Name

Preliminary Procedures


Remove the body side rear lower trim panel. Refer to Body Side Rear Lower Trim Panel Replacement

1

Front Side Pressure Relief Valve

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

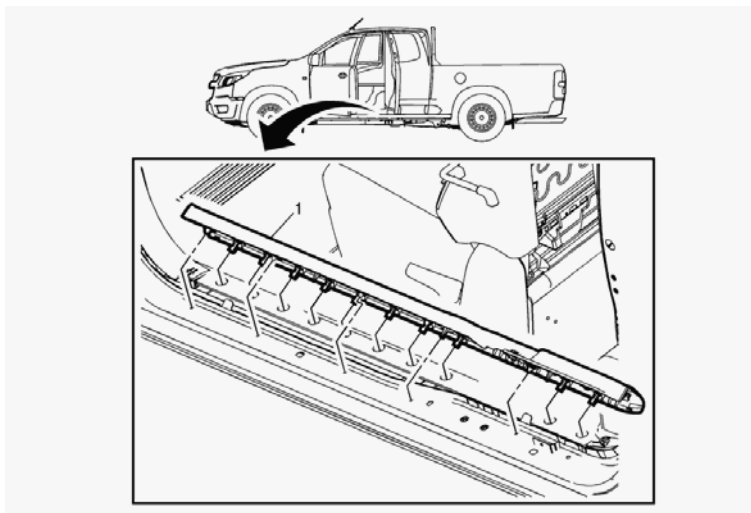

Front Side Door Sill Trim Plate Replacement

Callout

1

Front Side Door Sill Trim Plate Assembly

Procedure


Grasp the front side door sill trim plate and pull the sill plate away from the body to release the fasteners.

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

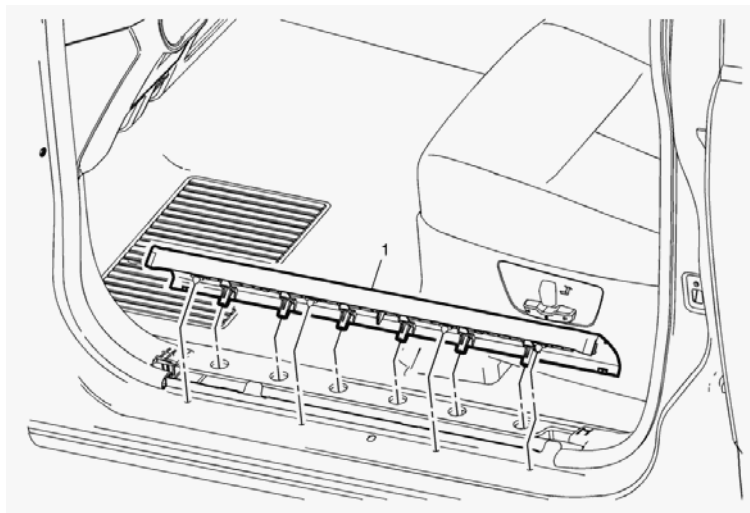

Front Side Door Sill Trim Plate Replacement

Callout

Component Name

Front Side Door Sill Trim Plate Assembly

1


Procedure

Grasp the front side door sill trim plate and pull the sill plate away from the body to release the fasteners.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

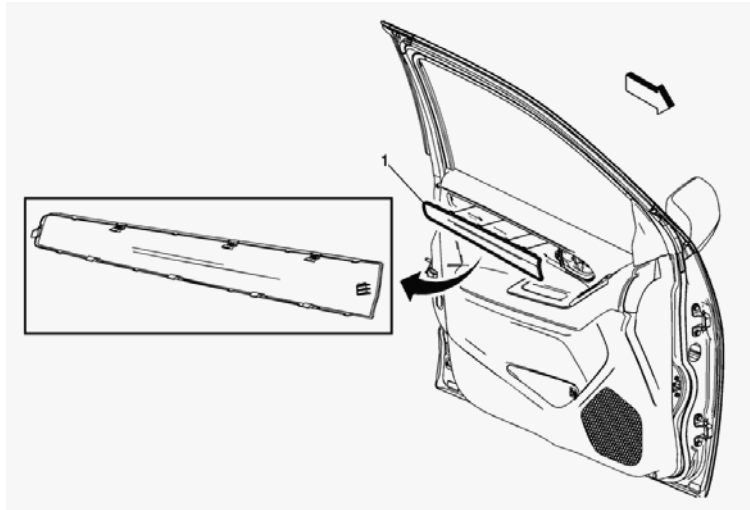

Front Side Door Trim Panel Applique Replacement

Callout

Component Name

Front Side Door Trim Panel Applique Assembly

1


Procedure

Use a small flat-bladed tool to release the integral clips from the front side door trim panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

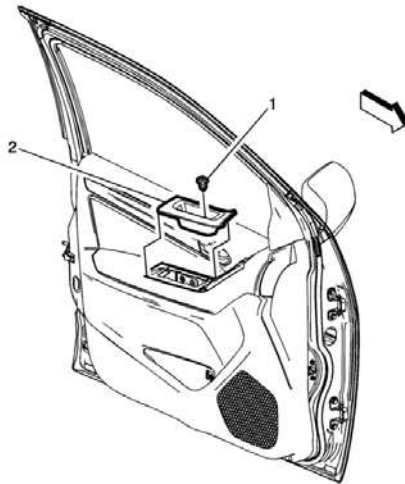

Front Side Door Trim Panel Handle Replacement

Callout

Component Name

Front Side Door Inside Trim Panel Handle Fastener

Caution: Refer to Fastener Caution.

Procedure

Use a small flat bladed tool to open the front side door trim integral cap to access the fastener.


1

2

Front Side Door Trim Panel Handle Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

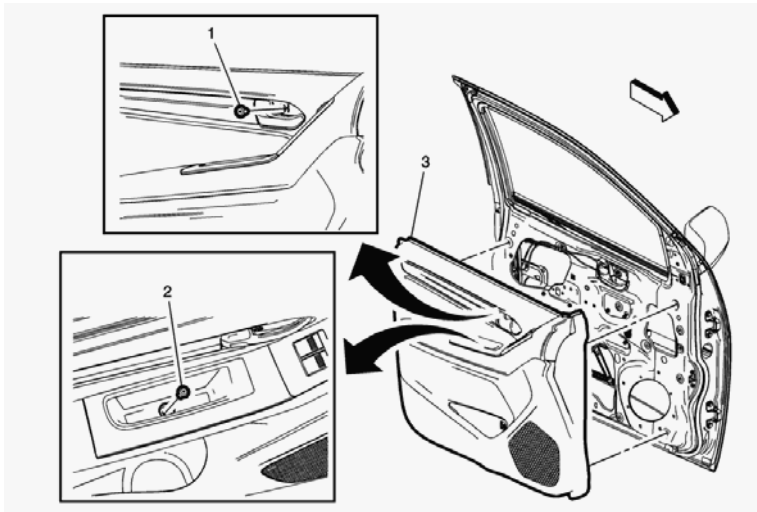

Front Side Door Trim Panel Replacement

Callout	Component Name
Preliminary Procedure	

1. Remove the front side door upper trim panel. Refer to Front Side Door Upper Trim Panel Replacement.
2. Remove the front side door window regulator handle, if equipped. Refer to Front Side Door Window Regulator Handle Replacement.

Front Side Door Inside Handle Fastener

- 1 **Caution:** Refer to Front Side Door Inside Handle Fastener Fastener Caution.

Procedure

Use a small flat-bladed tool to open the front side door trim panel integral cap to access the fastener.

Front Side Door Inside Trim Panel Handle Fastener

- 2 **Procedure**

Use a small flat-bladed tool to open the front side door pull handle integral cap to access the fastener.


Front Side Door Trim Panel Assembly

Procedure

- 3
 1. Use the appropriate plastic trim tool to aid in the removal of the door trim.
 2. Pull upwards on the door lock retainer cable to disengage.
 3. Disconnect the electrical connector.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

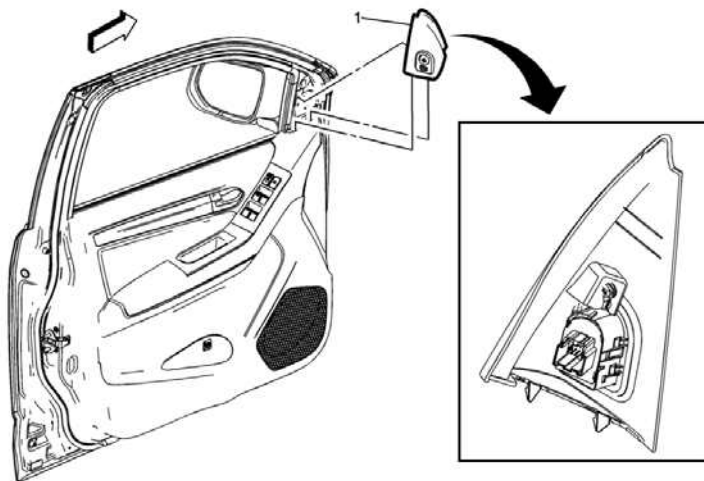

Front Side Door Upper Trim Panel Replacement

Callout

Front Side Door Upper Trim Panel Assembly

Component Name

Procedure


1

1. Use the appropriate plastic trim tool to release the front side door upper trim panel from the front side door inner pane
2. Disconnect electrical connector, if equipped.
3. Transfer parts as necessary.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

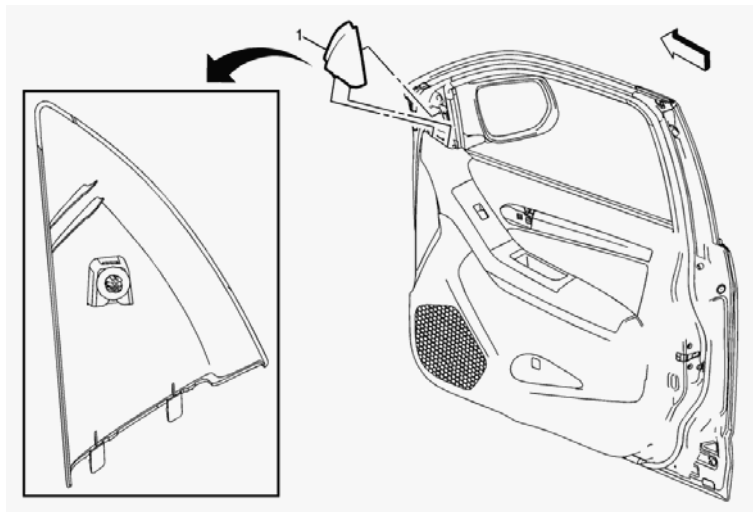

Front Side Door Upper Trim Panel Replacement

Callout

1

Front Side Door Upper Trim Panel Assembly


Procedure

Use the appropriate plastic trim tool to release the front side door upper trim panel from the front side door inner panel.

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

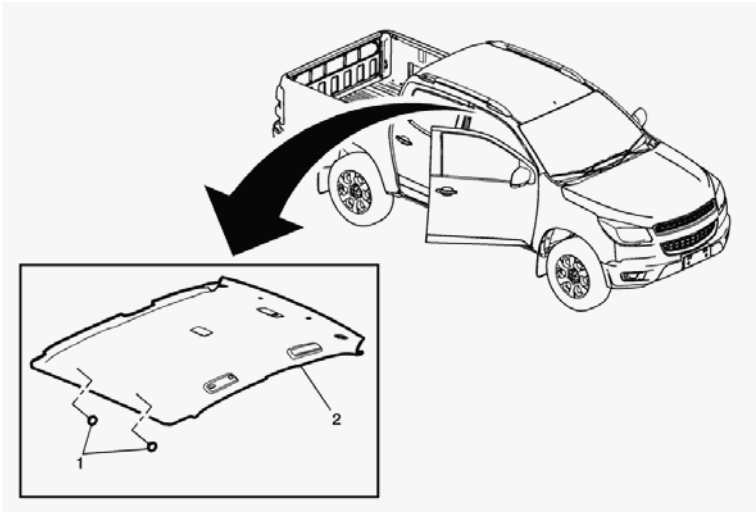


Headlining Trim Panel Replacement

card

Callout	Component Name
Preliminary Procedures	
1. Remove the sunshade assembly. Refer to Sunshade Replacement. 2. Remove the sunshade support assembly. Refer to Sunshade Support Replacement. 3. Remove the roof rail front assist handle assembly. Refer to Roof Rail Front Assist Handle Replacement. 4. Remove the roof rail rear assist handle assembly. Refer to Roof Rail Rear Assist Handle Replacement. 5. Remove the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement. 6. Remove the body side rear upper trim panel assembly. Refer to Body Side Rear Upper Trim Panel Replacement. 7. Remove the center pillar upper trim panel assembly. Refer to Center Pillar Upper Trim Panel Replacement. 8. Remove the dome lamp assembly. Refer to Dome Lamp Replacement. 9. Remove the reading lamp assembly, if equipped. Refer to Reading Lamp Replacement. 10. Remove the driver and passenger seats. Refer to Driver or Passenger Seat Removal and Installation. 11. Remove the front floor console. Refer to Front Floor Console Replacement.	
1	Headliner Trim Panel Retainer (Qty: 2)
	Headlining Trim Panel Assembly
Procedure	
2	1. Move the driver and passenger seat fully forward and decline. 2. Prior to removal, note the routing of the wire harness to aid in reassembly and to ensure proper installation. 3. Disconnect the electrical connectors from the headliner trim panel assembly.
Note: When installing a new headliner, tape any unused connector to the headliner with a high adhesive tape.	

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

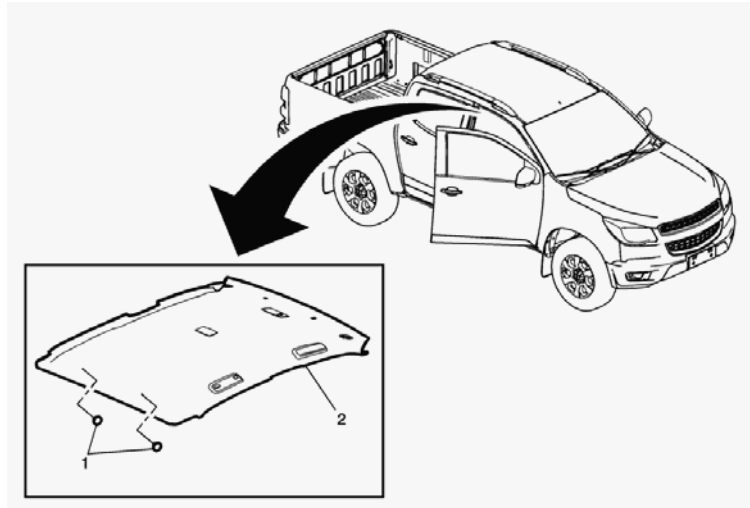

Headlining Trim Panel Replacement

Callout

Component Name

Warning: Do not attempt to repair or alter the head impact energy-absorbing material glued to the headliner or to the garnish trims. If the material damaged, replace the headliner and/or the garnish trim. Failure to do so could result in personal injury.

Caution: Use care when working around the head curtain inflator module. Sharp tools may puncture the curtain airbag. If the head curtain inflator module is damaged in any way, it must be replaced.

Caution: If a vehicle is equipped with a head curtain inflator module ensure that the inflator module and tether are undamaged. If tether or curtain airbag are damaged in any way, they must be replaced.

Preliminary Procedures

1. Disable the SIR system. Refer to SIR Disabling and Enabling.
2. Remove the sunshade assembly. Refer to Sunshade Replacement.
3. Remove the sunshade support assembly. Refer to Sunshade Support Replacement.
4. Remove the roof rail front assist handle assembly. Refer to Roof Rail Front Assist Handle Replacement.
5. Remove the roof rail rear assist handle assembly. Refer to Roof Rail Rear Assist Handle Replacement.
6. Remove the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement.
7. Remove the body lock pillar upper trim panel assembly. Refer to Body Lock Pillar Upper Trim Panel Replacement.
8. Remove the center pillar upper trim panel assembly. Refer to Center Pillar Upper Trim Panel Replacement.
9. Remove the dome lamp assembly. Refer to Dome Lamp Replacement.
10. Remove the reading lamp assembly. Refer to Reading Lamp Replacement.

- 1 Headliner Trim Panel Retainer (Qty: 2)

Headlining Trim Panel Assembly


Procedure

1. Move the driver and passenger seat fully forward and decline.
2. Prior to removal, note the routing of the wire harness to aid in reassembly and to ensure proper installation.
3. Drop the headliner down.
4. Disconnect the electrical connectors from the headliner trim panel assembly.
5. Remove the windshield. Refer to Windshield Replacement.
6. With the aid of an assistant, remove the headliner trim panel assembly from the vehicle through the front windshield.

Note: When installing a new headliner, tape any unused connector to the headliner with a high adhesive tape.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

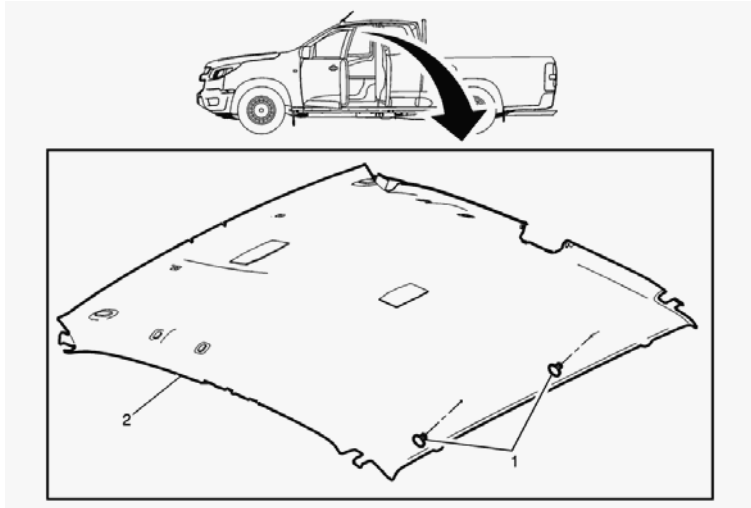

Headlining Trim Panel Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the sunshade assembly. Refer to Sunshade Replacement.
2. Remove the sunshade support assembly. Refer to Sunshade Support Replacement.
3. Remove the roof rail front assist handle assembly. Refer to Roof Rail Front Assist Handle Replacement.
4. Remove the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement.
5. Remove the body side rear upper trim panel assembly. Refer to Body Side Rear Upper Trim Panel Replacement.
6. Remove the dome lamp assembly. Refer to Dome Lamp Replacement.
7. Remove the reading lamp assembly. Refer to Reading Lamp Replacement.
8. Remove the driver and passenger seat head restraint. Refer to Driver or Passenger Seat Head Restraint Replacement.
9. Remove the rear side door lock striker cover. Refer to Rear Side Door Lock Striker Replacement.

1 Headliner Trim Panel Retainer (Qty: 2)

Headlining Trim Panel Assembly


Procedure

- 2
1. Move the driver and passenger seat fully forward and decline.
 2. Prior to removal, note the routing of the wire harness to aid in reassembly and to ensure proper installation.
 3. Disconnect the electrical connectors from the radio roof speaker, if equipped. Refer to Radio Roof Speaker Replacement.

Note: When installing a new headliner, tape any unused connector to the headliner with a high adhesive tape.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

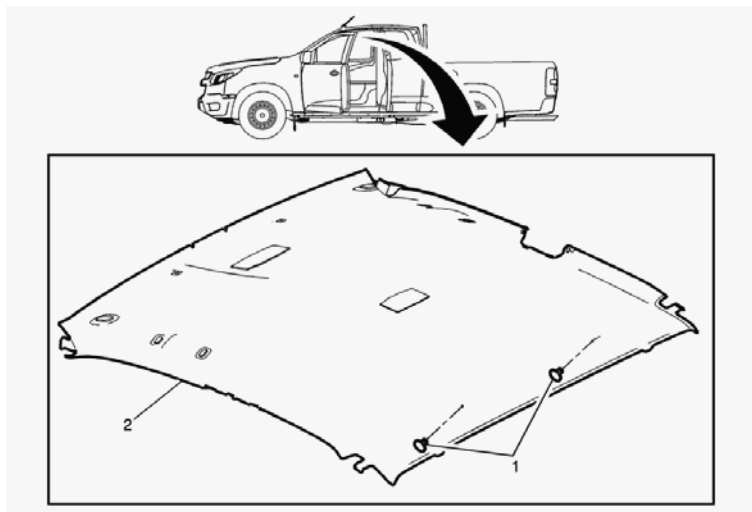

Headlining Trim Panel Replacement

Callout

Component Name

Warning: Do not attempt to repair or alter the head impact energy-absorbing material glued to the headliner or to the garnish trims. If the material damaged, replace the headliner and/or the garnish trim. Failure to do so could result in personal injury.

Caution: Use care when working around the head curtain inflator module. Sharp tools may puncture the curtain airbag. If the head curtain inflator module is damaged in any way, it must be replaced.

Caution: If a vehicle is equipped with a head curtain inflator module ensure that the inflator module and tether are undamaged. If tether or curtain airbag are damaged in any way, they must be replaced.

Preliminary Procedures

1. Disable the SIR system. Refer to SIR Disabling and Enabling.
2. Remove the sunshade assembly. Refer to Sunshade Replacement.
3. Remove the sunshade support assembly. Refer to Sunshade Support Replacement.
4. Remove the roof rail front assist handle assembly. Refer to Roof Rail Front Assist Handle Replacement.
5. Remove the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement.
6. Remove the body side rear upper trim panel assembly. Refer to Body Side Rear Upper Trim Panel Replacement.
7. Remove the dome lamp assembly. Refer to Dome Lamp Replacement.
8. Remove the reading lamp assembly. Refer to Reading Lamp Replacement.
9. Remove the driver and passenger seat head restraint. Refer to Driver or Passenger Seat Head Restraint Replacement.
10. Remove the rear side door lock striker cover. Refer to Rear Side Door Lock Striker Replacement.

- 1 Headliner Trim Panel Retainer (Qty: 2)

Headlining Trim Panel Assembly

Procedure

1. Move the driver and passenger seat fully forward and recline.
2. Prior to removal, note the routing of the wire harness to aid in reassembly and to ensure proper installation.
2. Disconnect the electrical connectors from the radio roof speaker, if equipped. Refer to Radio Roof Speaker Replacement.


Note: It may be necessary to use the aid of an assistant when positioning the headliner through the passenger door to avoid a crease in the headliner.

4. Remove the headliner through the passenger front door.

Note: When installing a new headliner, tape any unused connector to the headliner with a high adhesive tape.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

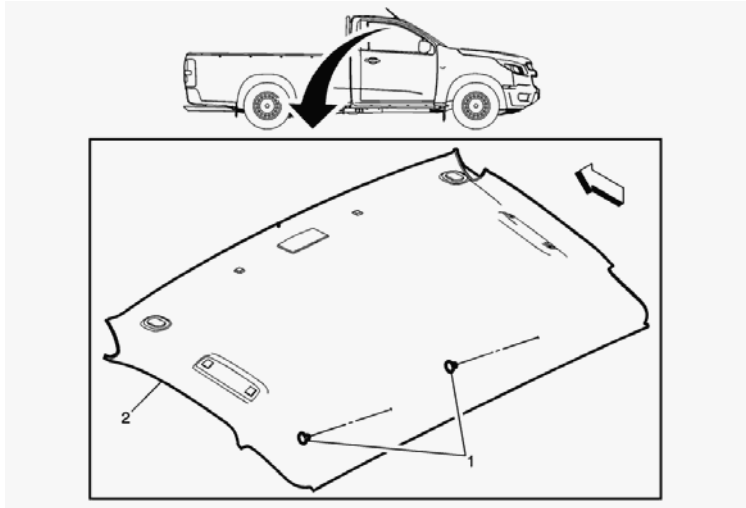

Headlining Trim Panel Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the sunshade assembly. Refer to Sunshade Replacement.
2. Remove the sunshade support assembly. Refer to Sunshade Support Replacement.
3. Remove the roof rail front assist handle assembly. Refer to Roof Rail Front Assist Handle Replacement.
4. Remove the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement.
5. Remove the body side rear upper trim panel assembly. Refer to Body Side Rear Upper Trim Panel Replacement.
6. Remove the dome lamp assembly. Refer to Dome Lamp Replacement.
7. Remove the driver and passenger seat head restraint. Refer to Driver or Passenger Seat Head Restraint Replacement.

1 Headliner Trim Panel Retainer (Qty: 2)

Headlining Trim Panel Assembly


Procedure

- 2
 1. Move the driver and passenger seat fully forward and decline.
 2. Prior to removal, note the routing of the wire harness to aid in reassembly and to ensure proper installation.
 3. Disconnect the electrical connectors from the headliner trim panel assembly.

Note: When installing a new headliner, tape any unused connector to the headliner with a high adhesive tape.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

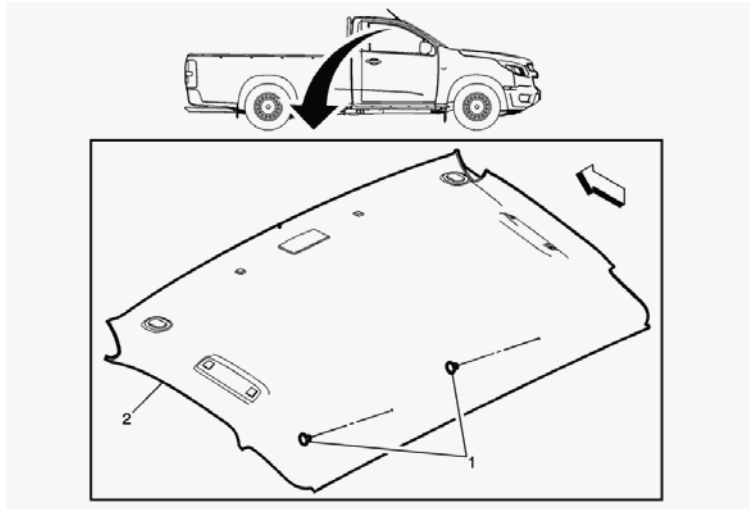

Headlining Trim Panel Replacement

Callout

Component Name

Warning: Do not attempt to repair or alter the head impact energy-absorbing material glued to the headliner or to the garnish trims. If the material damaged, replace the headliner and/or the garnish trim. Failure to do so could result in personal injury.

Caution: Use care when working around the head curtain inflator module. Sharp tools may puncture the curtain airbag. If the head curtain inflator module is damaged in any way, it must be replaced.

Caution: If a vehicle is equipped with a head curtain inflator module ensure that the inflator module and tether are undamaged. If tether or curtain airbag are damaged in any way, they must be replaced.

Preliminary Procedures

1. Disable the SIR system. Refer to SIR Disabling and Enabling.
2. Remove the sunshade assembly. Refer to Sunshade Replacement.
3. Remove the sunshade support assembly. Refer to Sunshade Support Replacement.
4. Remove the roof rail front assist handle assembly. Refer to Roof Rail Front Assist Handle Replacement.
5. Remove the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement.
6. Remove the body side rear upper trim panel assembly. Refer to Body Side Rear Upper Trim Panel Replacement.
7. Remove the dome lamp assembly. Refer to Dome Lamp Replacement.
8. Remove the driver and passenger seat head restraint. Refer to Driver or Passenger Seat Head Restraint Replacement.

- 1 Headliner Trim Panel Retainer (Qty: 2)

Headlining Trim Panel Assembly

Procedure


- 2
1. Move the driver and passenger seat fully forward and decline.
 2. Prior to removal, note the routing of the wire harness to aid in reassembly and to ensure proper installation.
 3. Disconnect the electrical connectors from the headliner trim panel assembly.

Note: When installing a new headliner, tape any unused connector to the headliner with a high adhesive tape.


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:


Removal Procedure

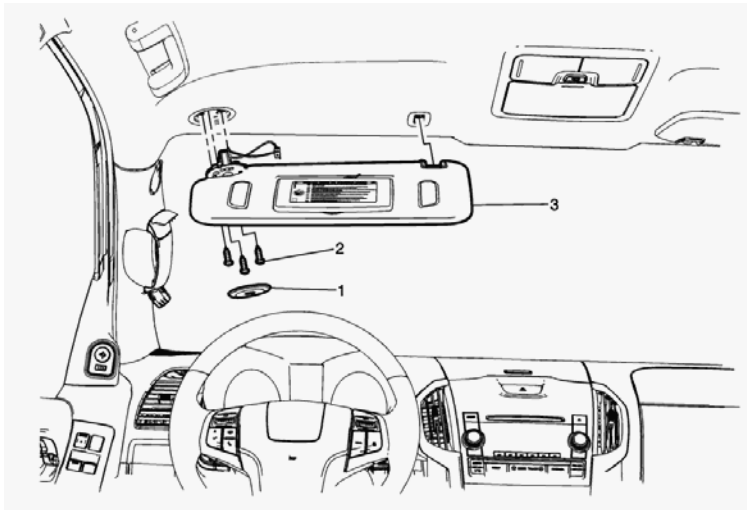


1. Remove the sunshade assembly (3). Refer to Sunshade Replacement.

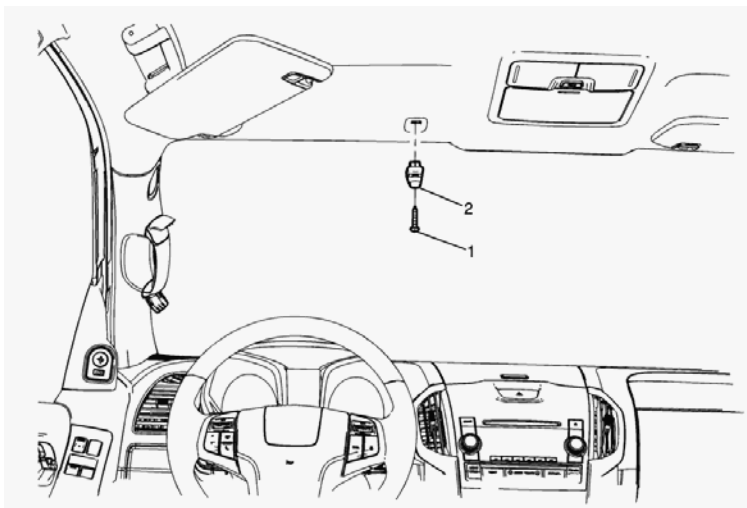


2. Remove the sunshade support assembly (2). Refer to Sunshade Support Replacement.

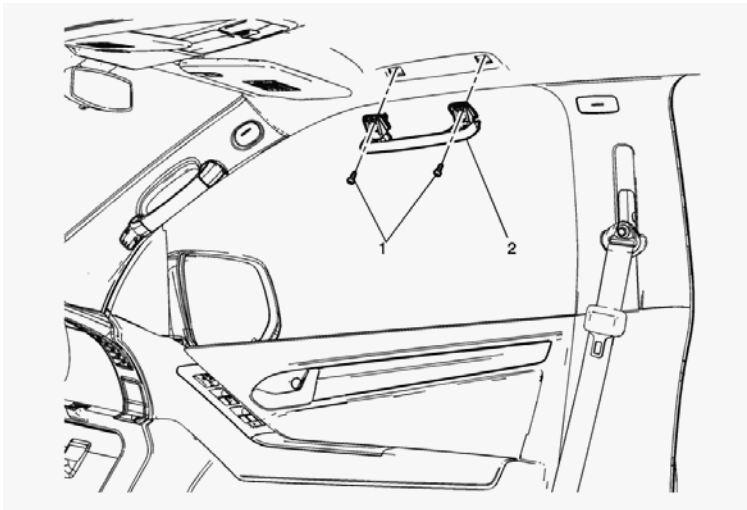


3. Remove the roof rail front assist handle assembly (2). Refer to Roof Rail Front Assist Handle Replacement.

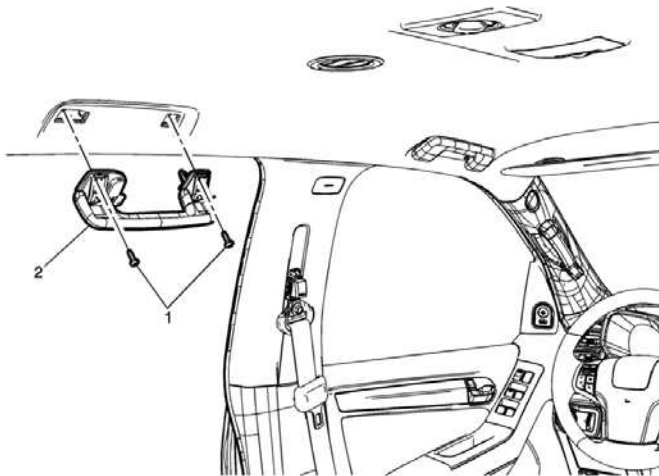


4. Remove the roof rail rear assist handle assembly (2). Refer to Roof Rail Rear Assist Handle Replacement.

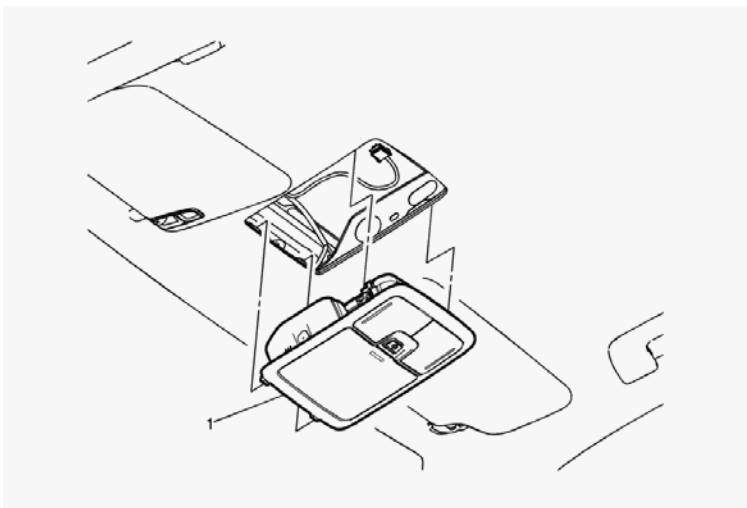


5. Remove the roof console (1). Refer to Roof Console Replacement.

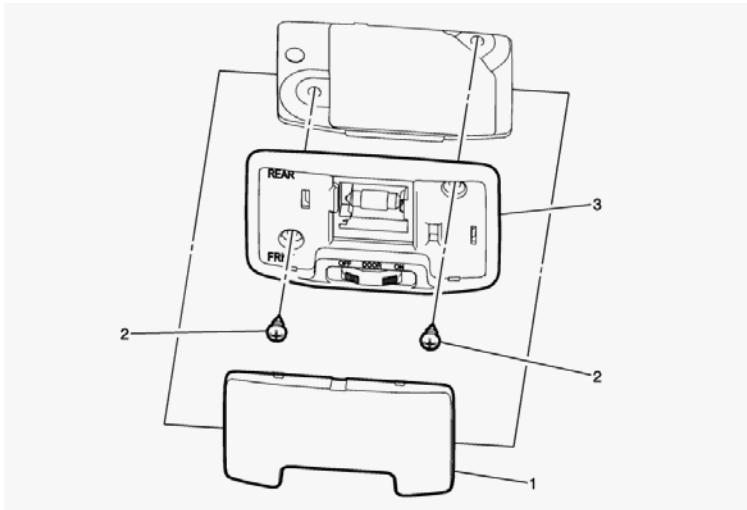


6. Remove the 2 dome lamp assemblies (3). Refer to Dome Lamp Replacement.

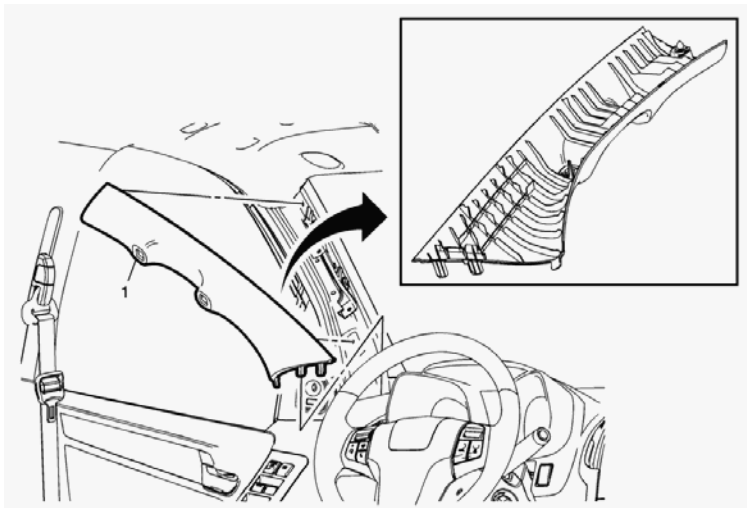


7. Remove the windshield side garnish molding assembly (1). Refer to Windshield Side Garnish Molding Replacement.

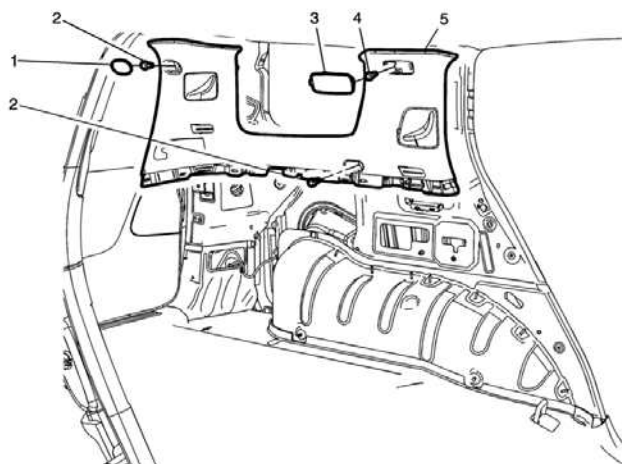


8. Remove the back body pillar inner panel trim panel (5). Refer to Back Body Pillar Inner Panel Trim Panel Replacement.

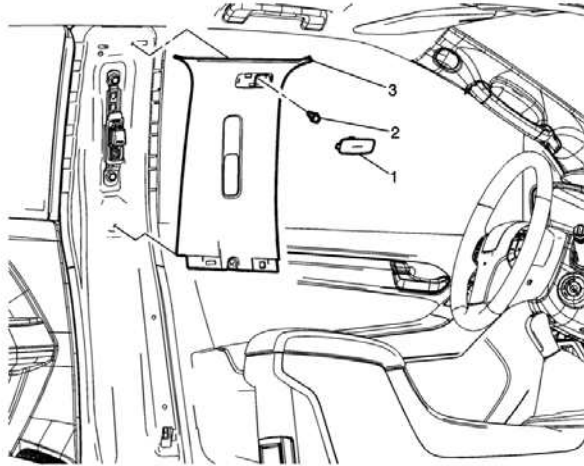


9. Remove the center pillar upper trim panel assembly (3). Refer to Center Pillar Upper Trim Panel Replacement.

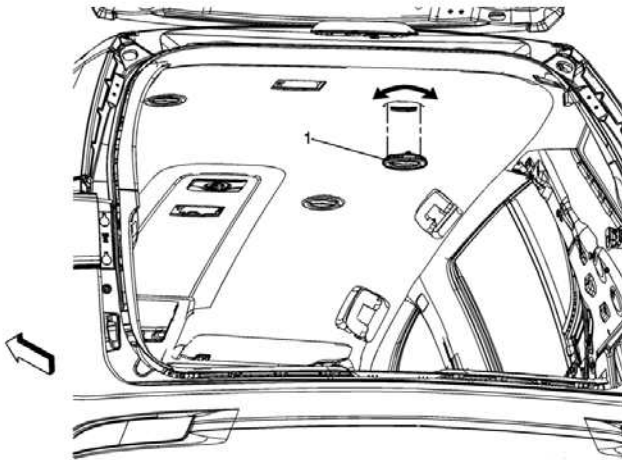

10. Remove the auxiliary air conditioning air outlet deflector (1). Refer to Auxiliary Air Conditioning Air Outlet Deflector Replacement.

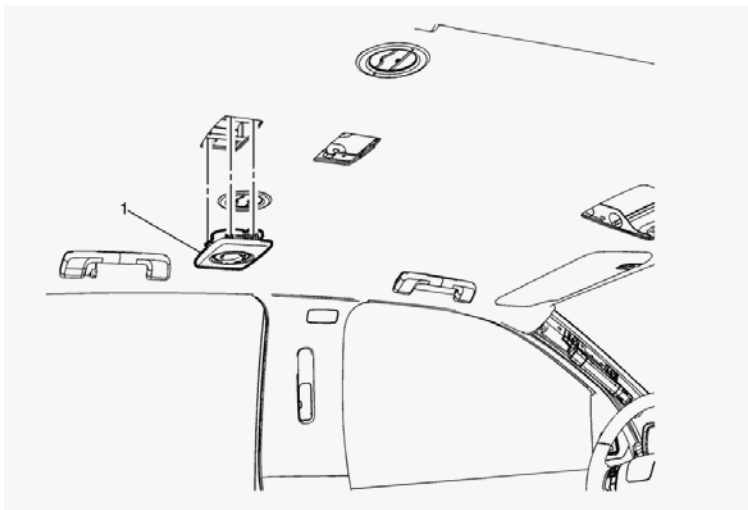


11. Remove the auxiliary heater and air conditioning control bezel (1). Refer to Auxiliary Heater and Air Conditioning Control Bezel Replacement.

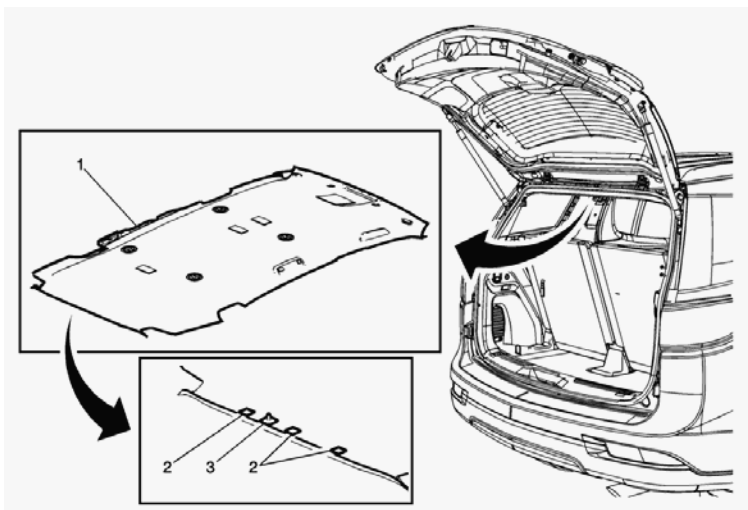


12. Move the seats fully forward and decline.
13. Disconnect the electrical connectors from the headliner trim panel assembly.
14. With an assistant, remove the headliner trim panel assembly (1) from the vehicle through the liftgate opening.
15. Prior to removal, note the routing of the wire harness to aid in reassembly and to ensure proper installation.


Installation Procedure

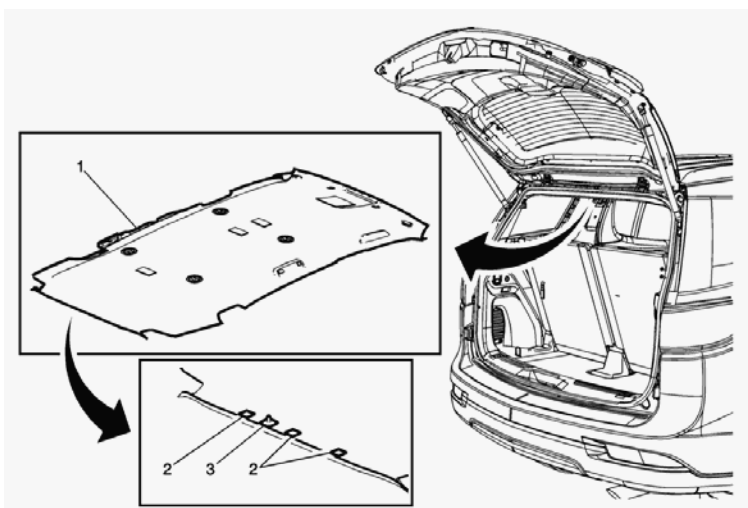


1. With an assistant, position the headliner trim panel assembly (1) into the vehicle through the liftgate opening.
2. Connect the electrical connectors to the headliner trim panel assembly (2).
3. Tape any unused connectors to the headliner with a high adhesive tape.

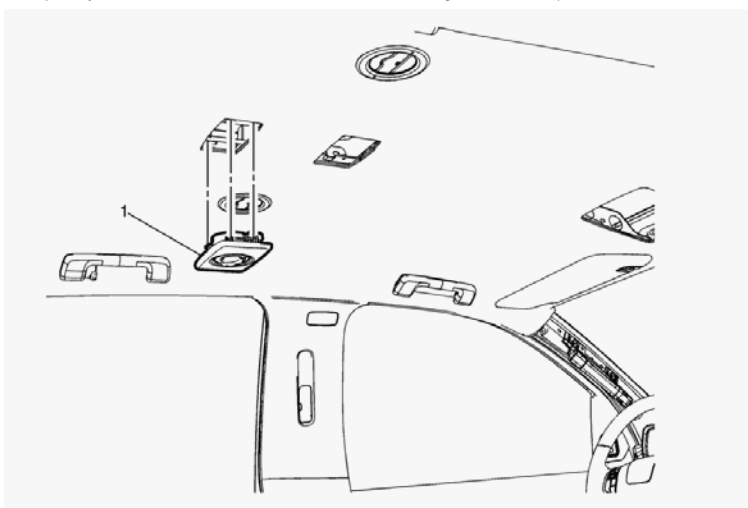


4. Install the auxiliary heater and air conditioning control bezel (1). Refer to Auxiliary Heater and Air Conditioning Control Bezel Replacem

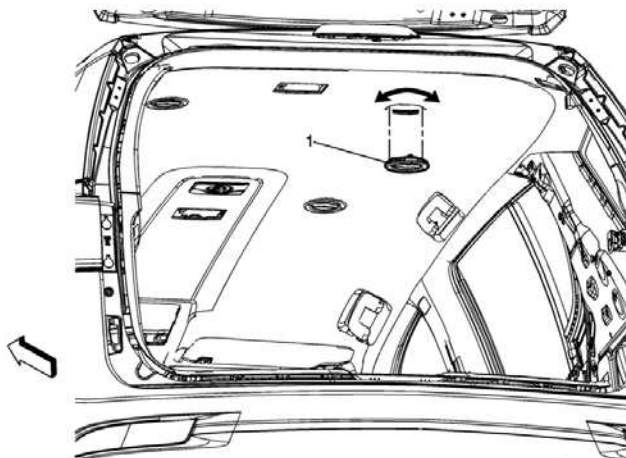


5. Install the auxiliary air conditioning air outlet deflectors (1). Refer to Auxiliary Air Conditioning Air Outlet Deflector Replacement.

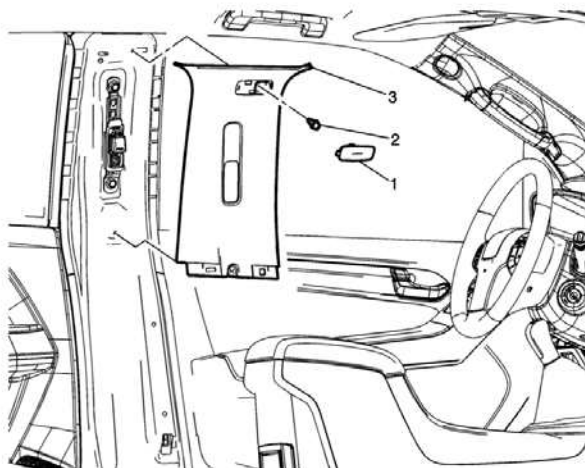


6. Install the center pillar upper trim panel assembly (3). Refer to Center Pillar Upper Trim Panel Replacement.

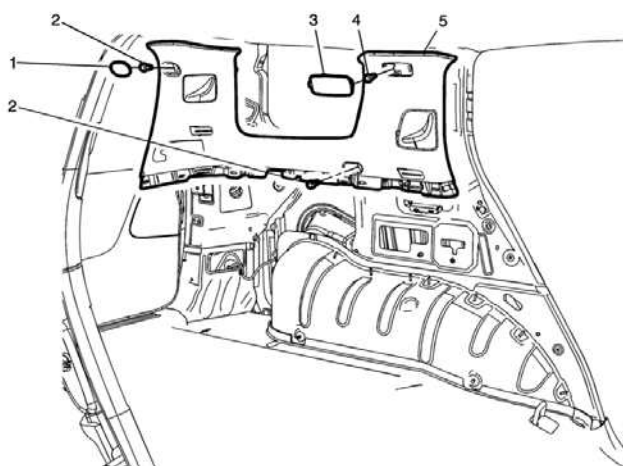


7. Install the back body pillar inner panel trim panel (5). Refer to Back Body Pillar Inner Panel Trim Panel Replacement.

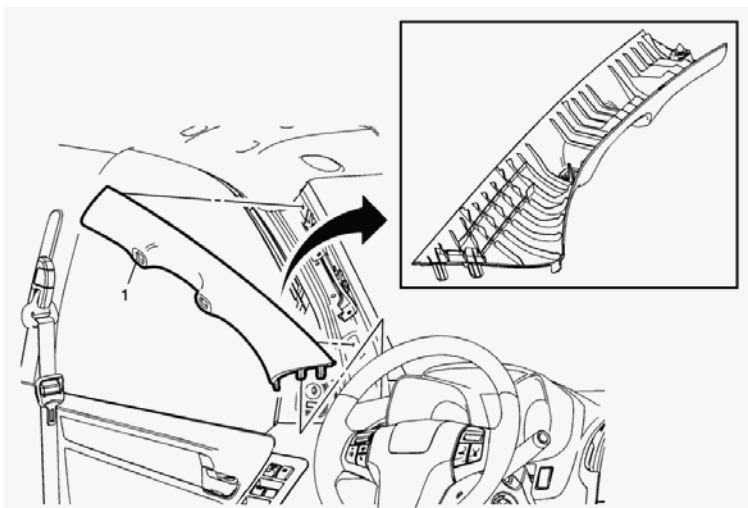


8. Install the windshield side garnish molding assembly (1). Refer to Windshield Side Garnish Molding Replacement.

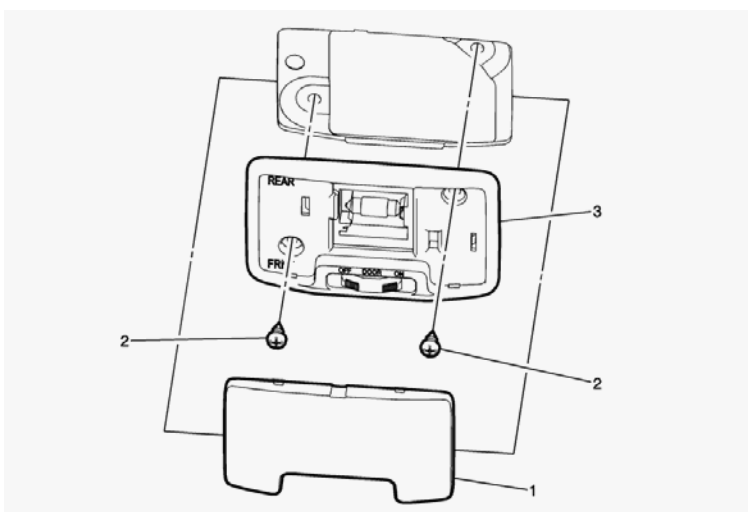


9. Install the 2 dome lamp assemblies (3). Refer to Dome Lamp Replacement.

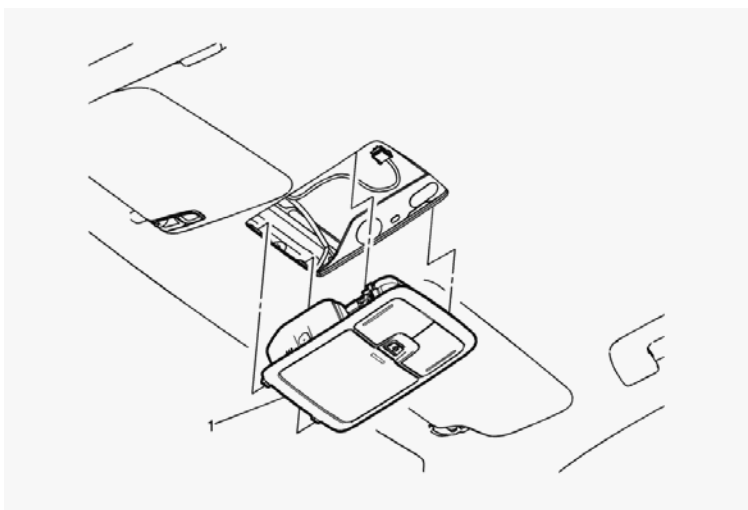


10. Install the roof console (1). Refer to Roof Console Replacement.

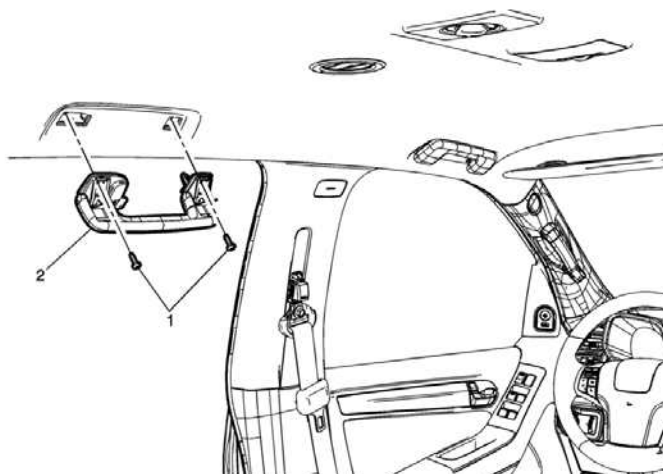


11. Install the roof rail rear assist handle assembly (2). Refer to Roof Rail Rear Assist Handle Replacement.

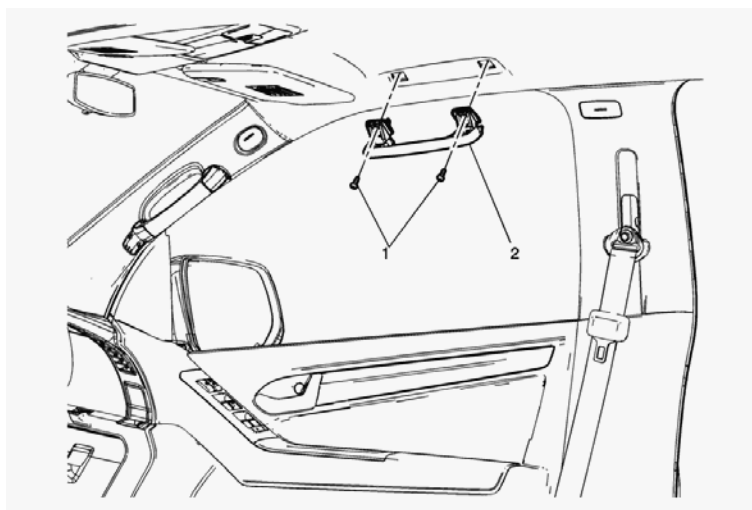

12. Install the roof rail front assist handle assembly (2). Refer to Roof Rail Front Assist Handle Replacement.

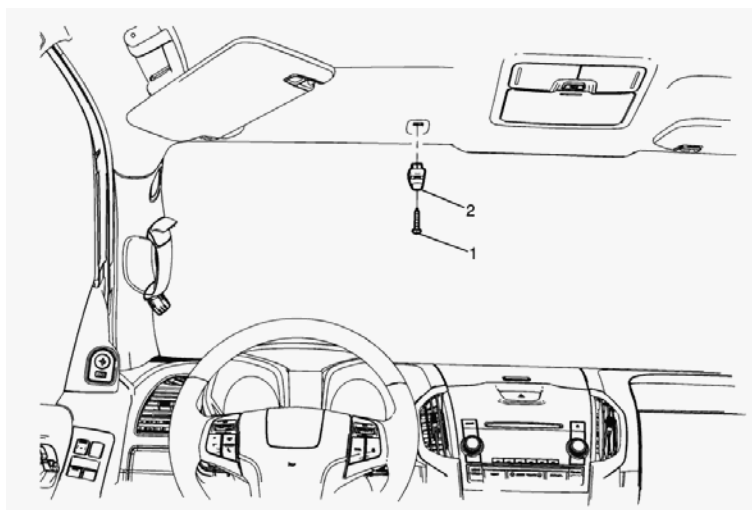

13. Install the sunshade support assembly (2). Refer to Sunshade Support Replacement.

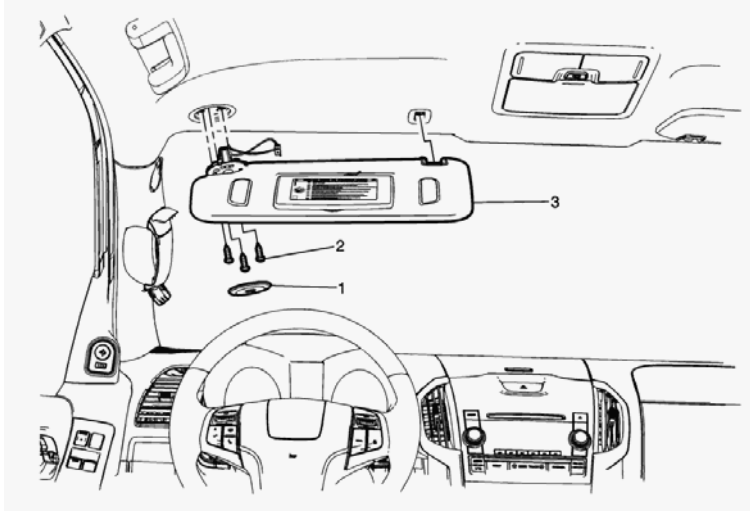

14. Install the sunshade assembly (3). Refer to Sunshade Replacement.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:


Fuel Delivery: | Fuel:

Warning: Do not attempt to repair or alter the head impact energy-absorbing material glued to the headliner or to the garnish trims. If the material is damaged, the headliner and/or the garnish trim. Failure to do so could result in personal injury.


Caution: If a vehicle is equipped with a head curtain inflator module ensure that the inflator module and tether are undamaged. If tether or curtain airbag is damaged in any way, they must be replaced.

Caution: Use care when working around the head curtain inflator module. Sharp tools may puncture the curtain airbag. If the head curtain inflator module is damaged in any way, it must be replaced.


Removal Procedure

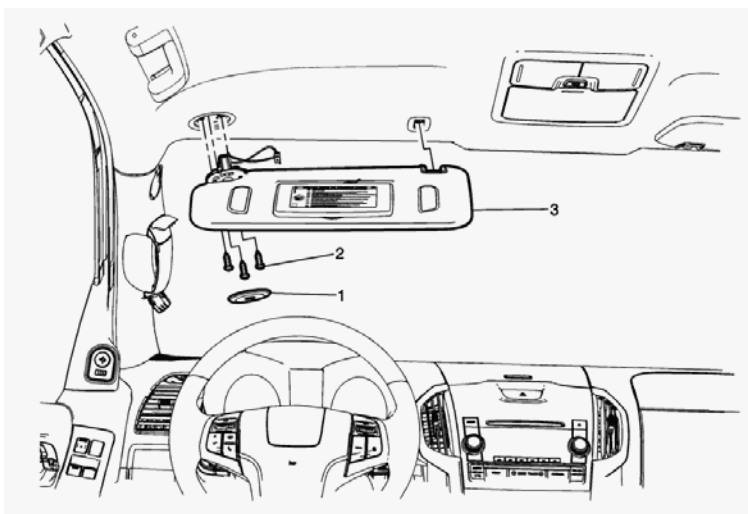


1. Disable the SIR system. Refer to SIR Disabling and Enabling.
2. Remove the sunshade assembly (3). Refer to Sunshade Replacement.

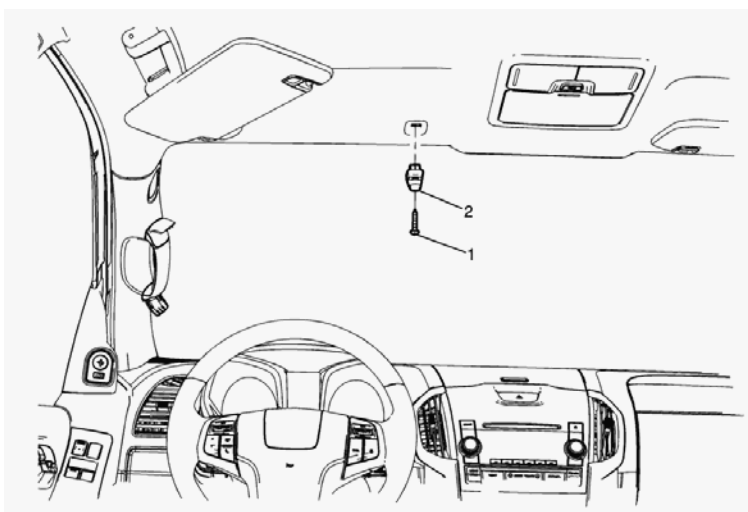


3. Remove the sunshade support assembly (2). Refer to Sunshade Support Replacement.

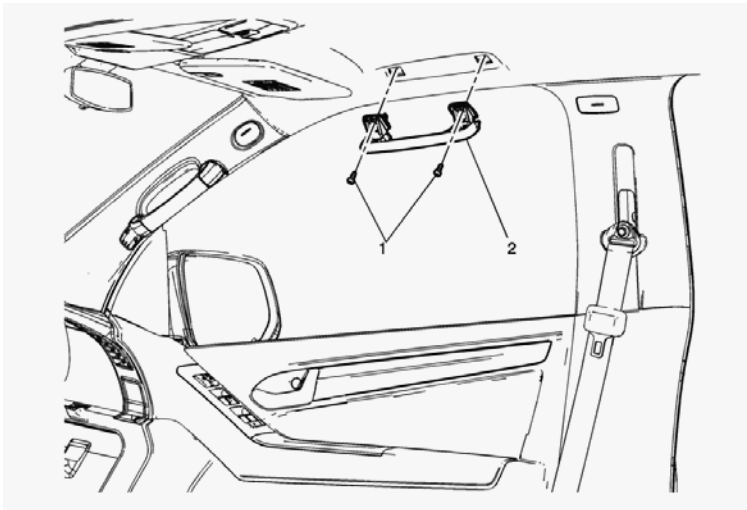


4. Remove the roof rail front assist handle assembly (2). Refer to Roof Rail Front Assist Handle Replacement.

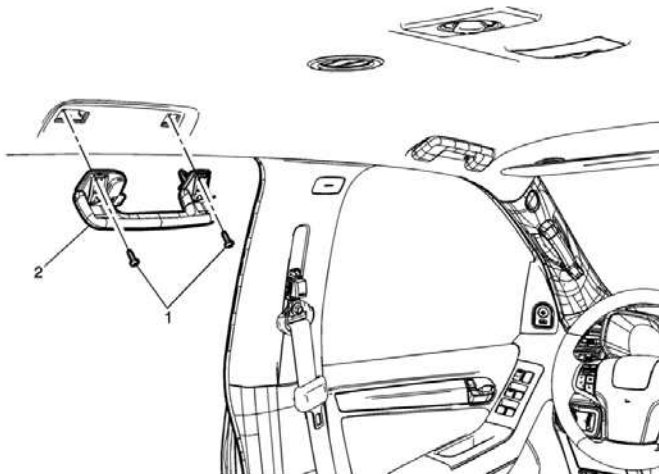


5. Remove the roof rail rear assist handle assembly (2). Refer to Roof Rail Rear Assist Handle Replacement.

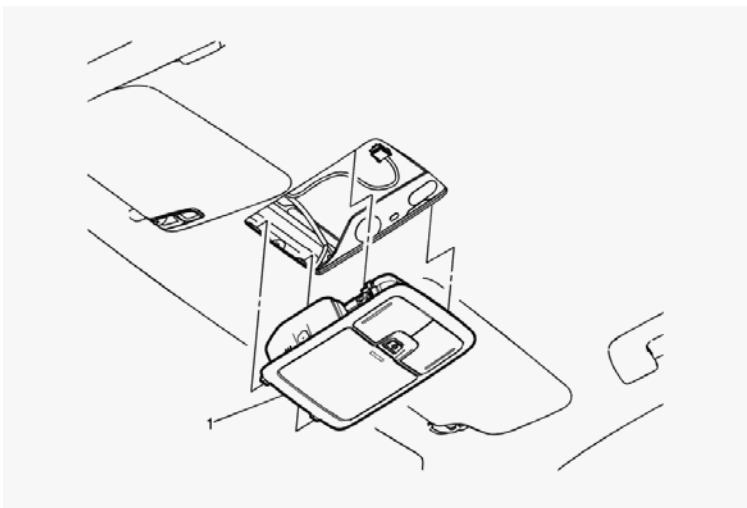


6. Remove the roof console (1). Refer to Roof Console Replacement.

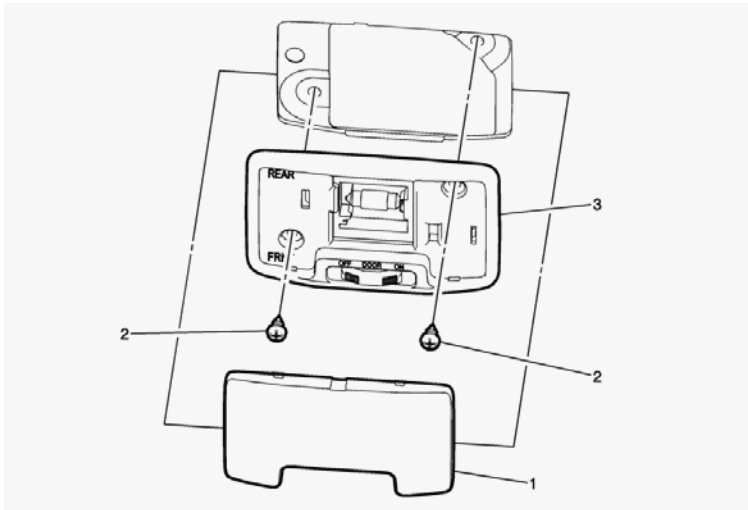


7. Remove the dome lamp assembly (3). Refer to Dome Lamp Replacement.

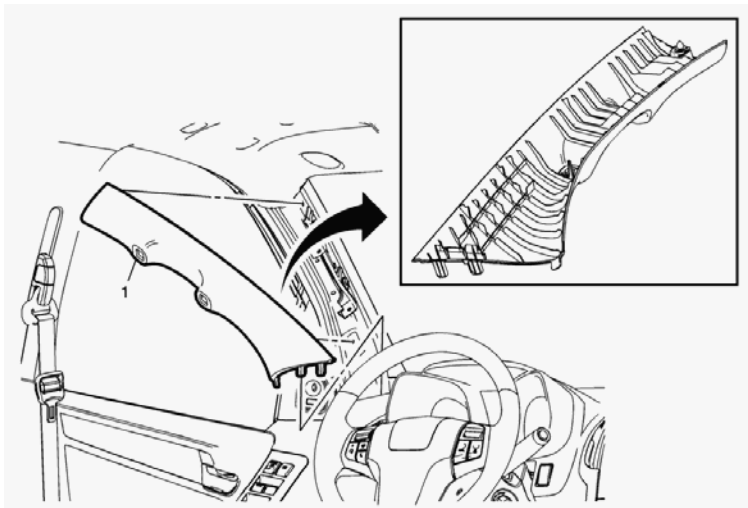


8. Remove the windshield side garnish molding assembly (1). Refer to Windshield Side Garnish Molding Replacement.

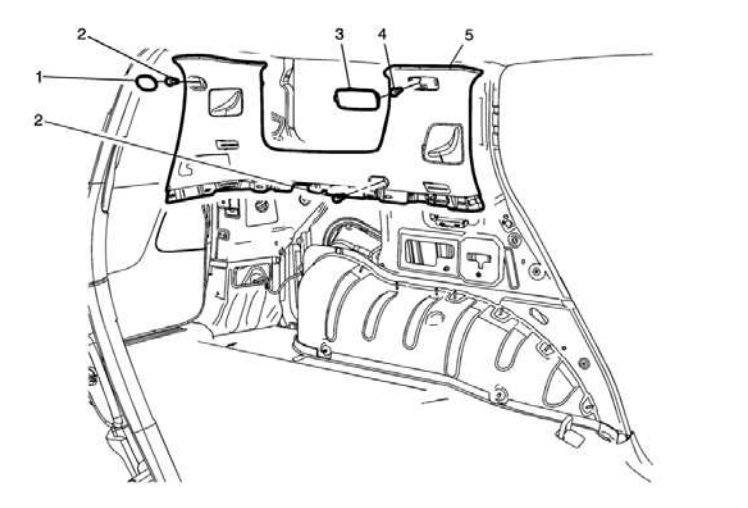


9. Remove the back body pillar inner panel trim panel (5). Refer to Back Body Pillar Inner Panel Trim Panel Replacement.

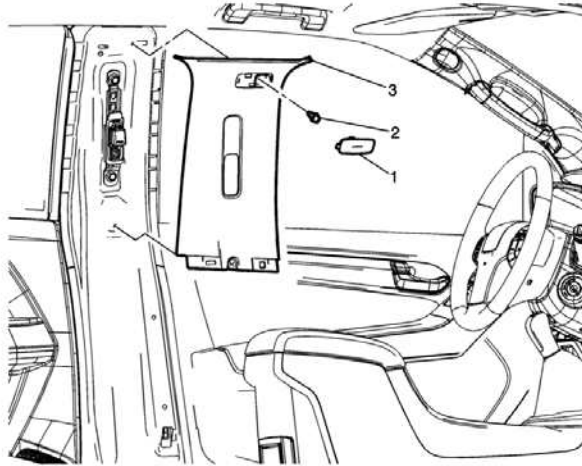


10. Remove the center pillar upper trim panel assembly (3). Refer to Center Pillar Upper Trim Panel Replacement.

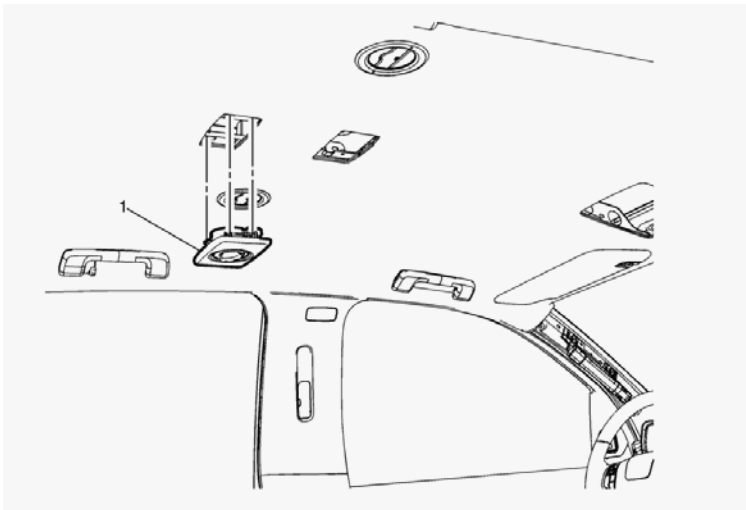


11. Remove the auxiliary heater and air conditioning control bezel (1). Refer to Auxiliary Heater and Air Conditioning Control Bezel Replacement.

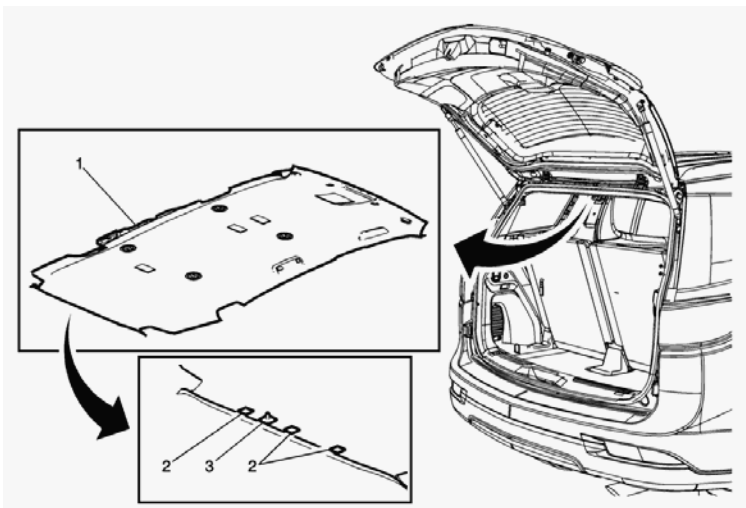


12. Move the seats fully forward and decline.
13. Use a plastic trim tool to separate dual lock retainers (2). Note the locator (3) to aid in proper installation.
14. Disengage auxiliary air conditioning outlet duct.
15. Disconnect the electrical connectors from the headliner trim panel assembly.
16. With an assistant, remove the headliner trim panel assembly (1) from the vehicle through the liftgate opening.
17. Prior to removal, note the routing of the wire harness to aid in reassembly and to ensure proper installation.

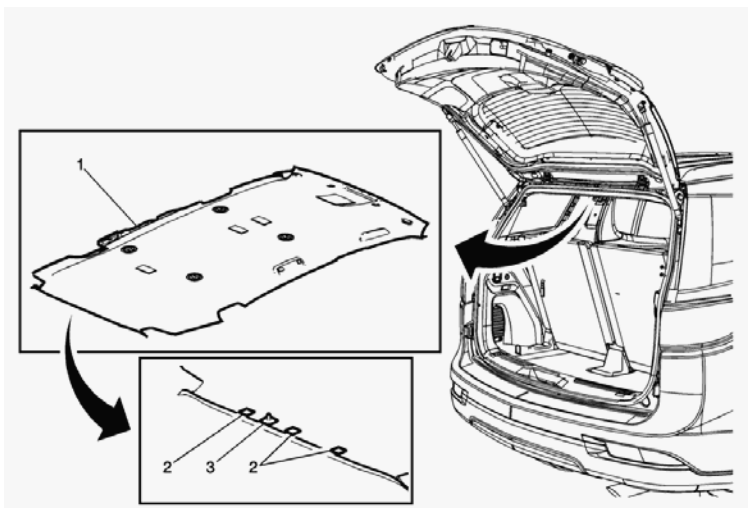


1. With an assistant, position the headliner trim panel assembly (1) into the vehicle through the liftgate opening.
2. Connect the electrical connectors to the headliner trim panel assembly.
3. Tape any unused connectors to the headliner with a high adhesive tape.
4. Seat locator (3) prior to engaging dual lock retainers (2).
5. Engage auxiliary air conditioning outlet duct.

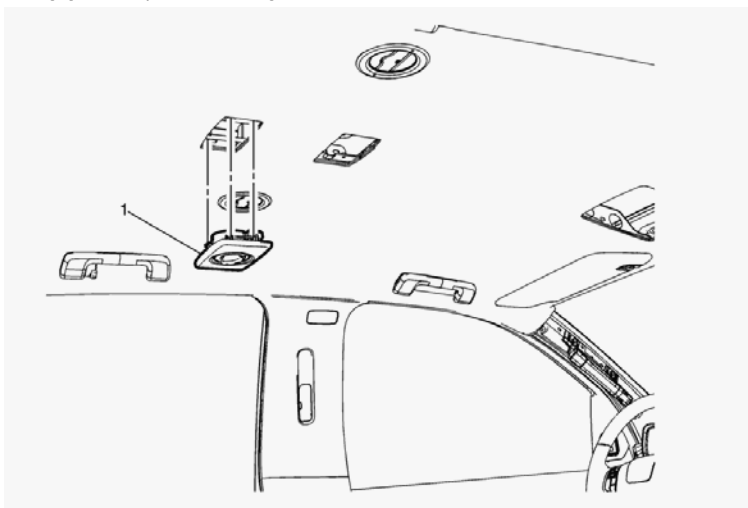


6. Install the auxiliary heater and air conditioning control bezel (1). Refer to Auxiliary Heater and Air Conditioning Control Bezel Replacement.

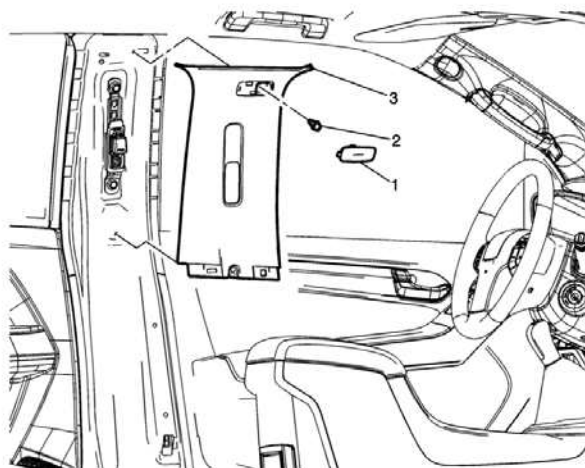


7. Install the center pillar upper trim panel assembly (3). Refer to Center Pillar Upper Trim Panel Replacement.

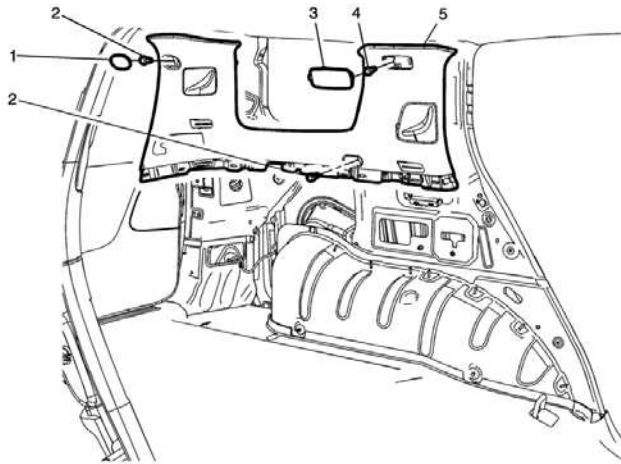


8. Install the back body pillar inner panel trim panel (5). Refer to Back Body Pillar Inner Panel Trim Panel Replacement.

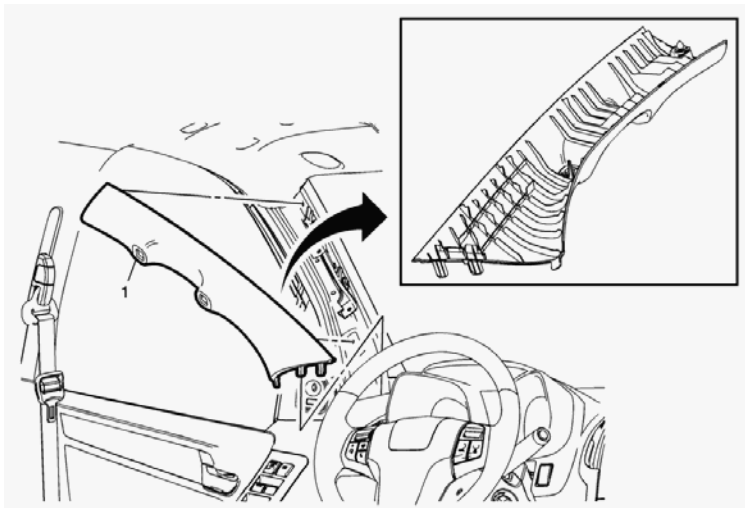


9. Install the windshield side garnish molding assembly (1). Refer to Windshield Side Garnish Molding Replacement.

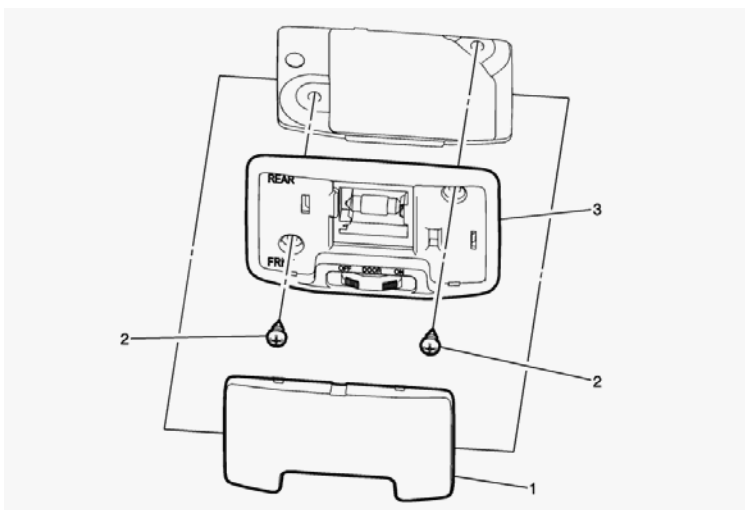


10. Install the dome lamp assembly (3). Refer to Dome Lamp Replacement.

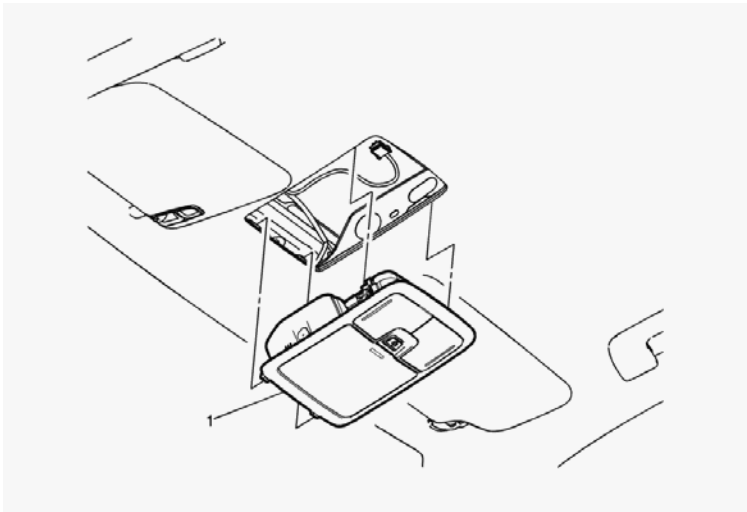


11. Install the roof console (1). Refer to Roof Console Replacement.

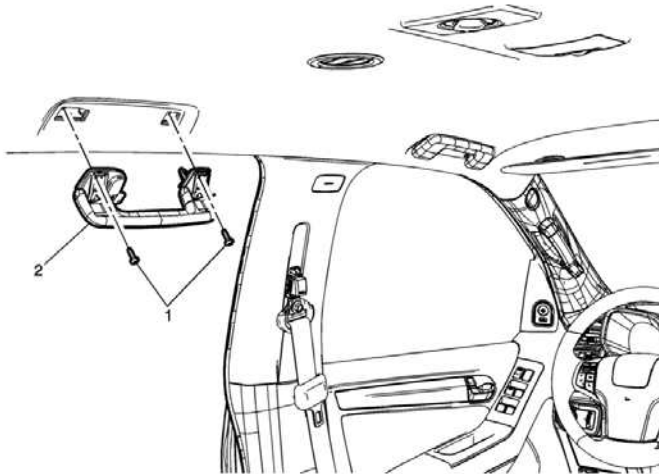


12. Install the roof rail rear assist handle assembly (2). Refer to Roof Rail Rear Assist Handle Replacement.

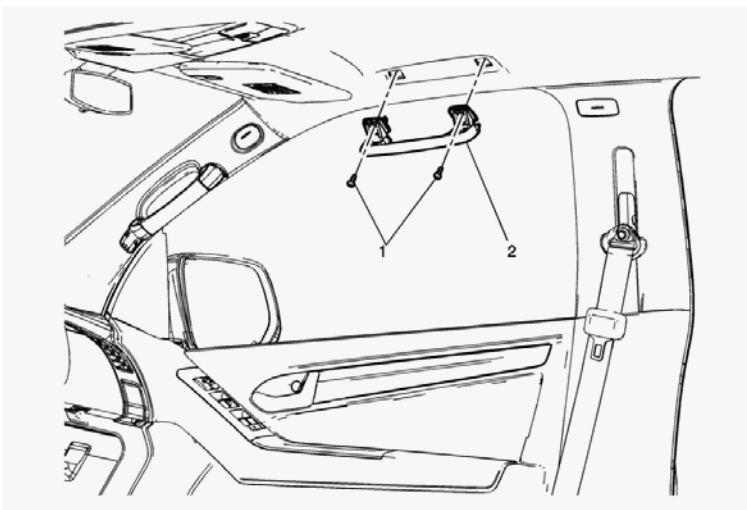

13. Install the roof rail front assist handle assembly (2). Refer to Roof Rail Front Assist Handle Replacement.

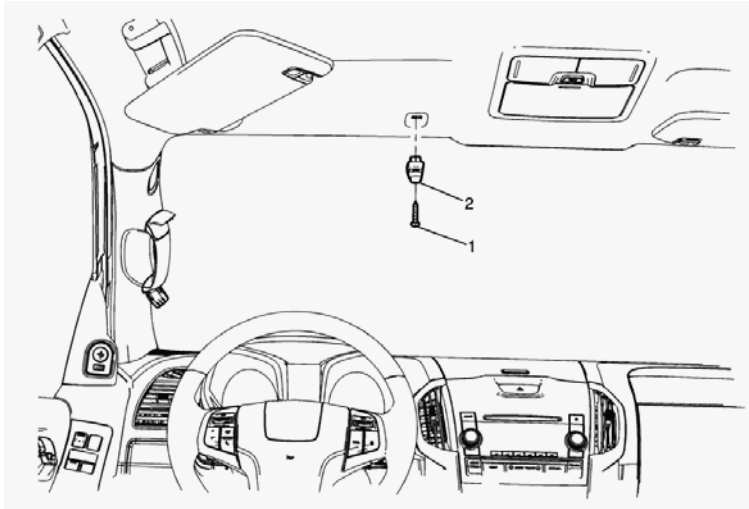

14. Install the sunshade support assembly (2). Refer to Sunshade Support Replacement.

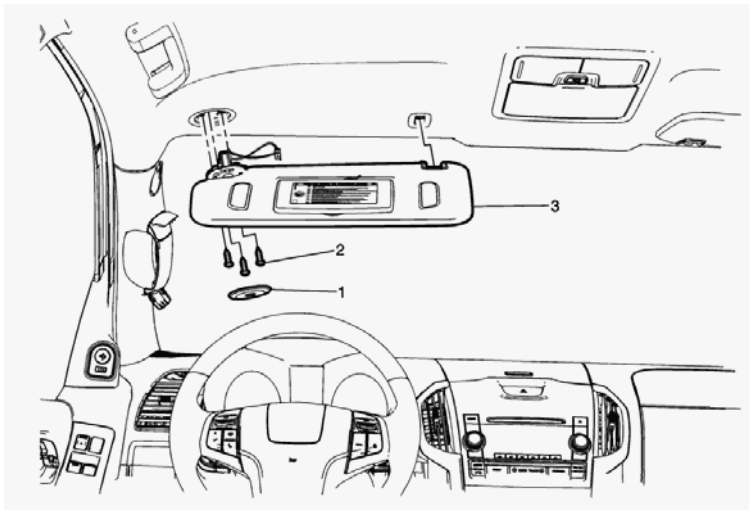


15. Install the sunshade assembly (3). Refer to Sunshade Replacement.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

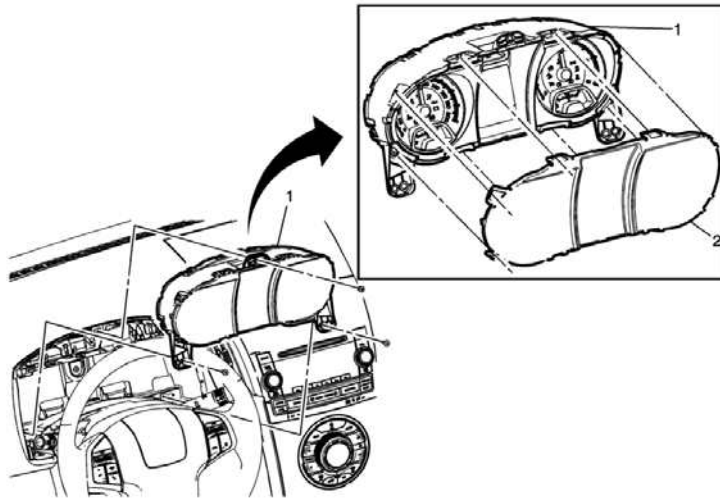

Instrument Cluster Lens Replacement

Callout

- 1 Instrument Cluster
Refer to Instrument Cluster Replacement

Instrument Cluster Lens

2


Procedure

Unsnap the instrument cluster lens from the instrument cluster assembly.

Component Name

2013 Chevrolet Colorado

Submodel: | **Engine Type:** | **Liters:**
Fuel Delivery: | **Fuel:**

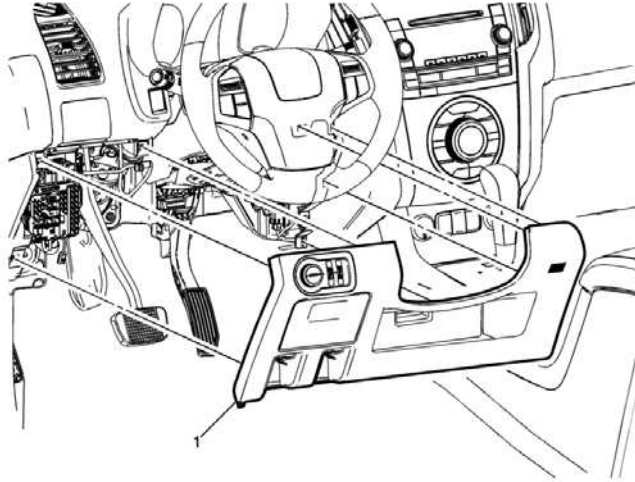

Instrument Lower Panel Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the hood primary latch release cable handle. Refer to Hood Primary Latch Release Cable Handle Replacement.
2. Remove the fuel tank filler door latch release cable level. Refer to Fuel Tank Filler Door Latch Release Cable Lever Replacement.

Instrument Lower Panel - Driver Side

Procedure


1

1. Use a flat bladed plastic trim tool in order to release the retainers securing the instrument lower panel to the instrument panel assembly.
2. Disconnect the electrical connections, the data link connector and the inside air temperature sensor.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

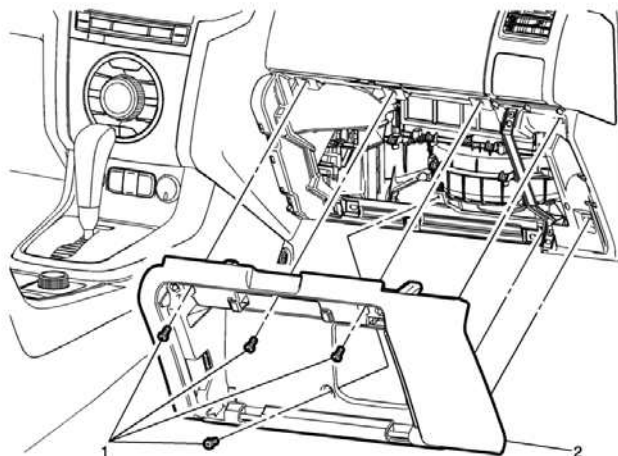

Instrument Lower Panel Replacement

Callout

Component Name

Preliminary Procedure

Remove the instrument panel compartment door. Refer to Instrument Panel Compartment Door Replacement.

1 Instrument Panel Lower Insulator Fastener (Qty: 4)


Caution: Refer to Fastener Caution.

2 Instrument Lower Panel - Passenger Side

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

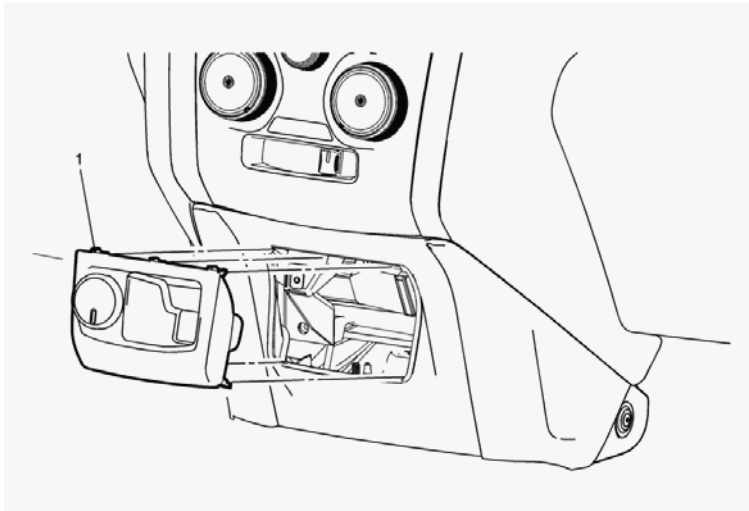

Instrument Panel Accessory Bezel Replacement

Callout

Component Name

Instrument Panel Accessory Bezel


Procedure

1

1. Use a flat bladed plastic trim tool in order to release the retainers securing the accessory bezel to the instrument panel lower extension.
2. Disconnect the electrical connections.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

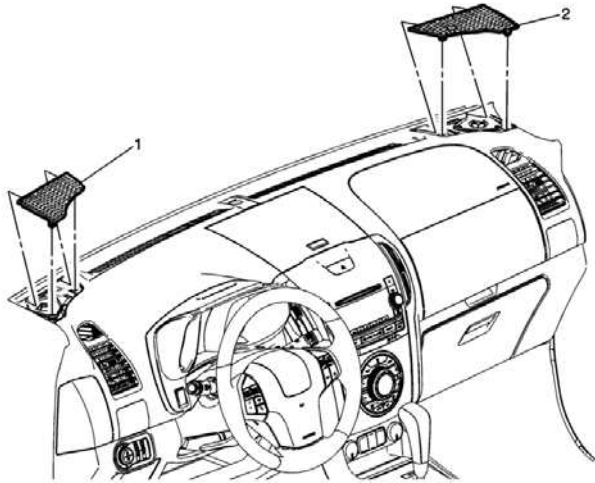

Instrument Panel Accessory Trim Plate Grille Replacement

Callout

Component Name

Instrument Panel Accessory Trim Plate Grille - Left Side

1

Procedure

Use a flat bladed plastic trim tool in order to release the retainer clips securing the grille to the instrument panel assembly.

Instrument Panel Accessory Trim Plate Grille - Right Side


Procedures

2

1. Use a flat bladed plastic trim tool in order to release the retainer clips securing the grille to the instrument panel assembly.
2. If equipped with a theft deterrent alarm indicator, disconnect electrical connection.
3. Transfer all necessary components.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

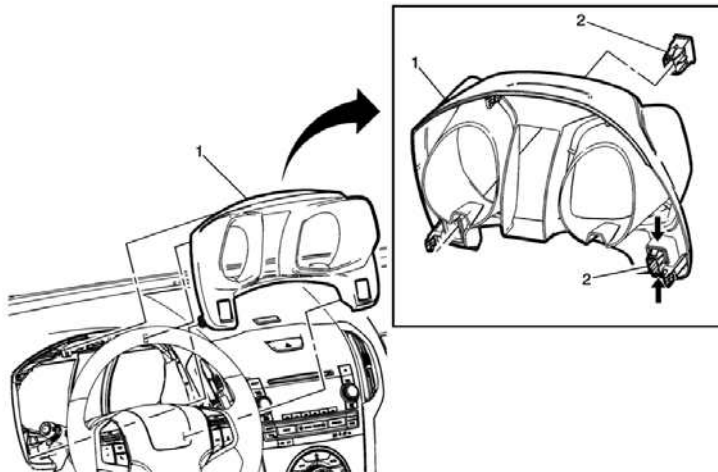

Instrument Panel Accessory Trim Plate Switch Hole Cover Replacement

Callout

1

Instrument Panel Cluster Trim Plate Assembly

Refer to Instrument Panel Cluster Trim Plate Replacement.

2

Instrument Panel Accessory Trim Plate Switch Hole Cover


Procedure

Push tabs to release the switch hole cover from the instrument panel cluster trim plate.

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

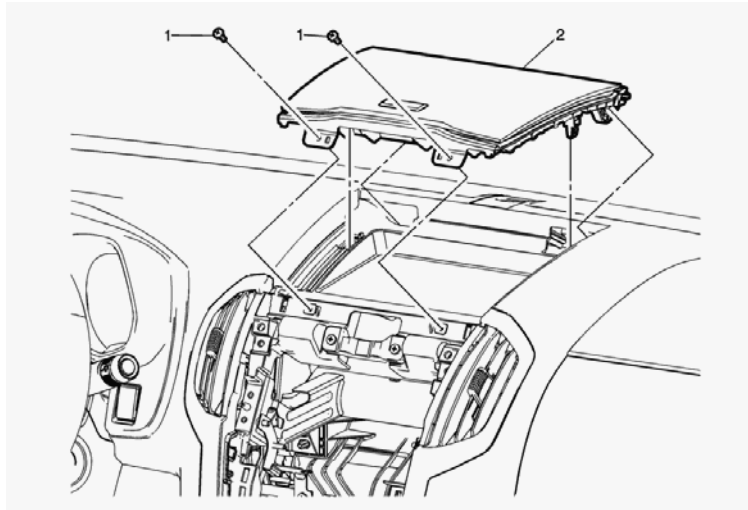

Instrument Panel Accessory Upper Trim Plate Replacement

Callout

Component Name

Preliminary Procedure

1. Remove the instrument panel center trim plate, if applicable. Refer to Instrument Panel Center Trim Plate Replacement.
2. Remove the radio, if applicable. Refer to Radio Replacement.

1

Instrument Panel Accessory Mount Plate Fastener (Qty: 2)

Caution: Refer to Fastener Caution.

Instrument Panel Accessory Upper Trim Plate

2


Procedure

Use a flat bladed plastic trim tool in order to release the retainers securing the instrument panel accessory upper trim plate to instrument panel assembly.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

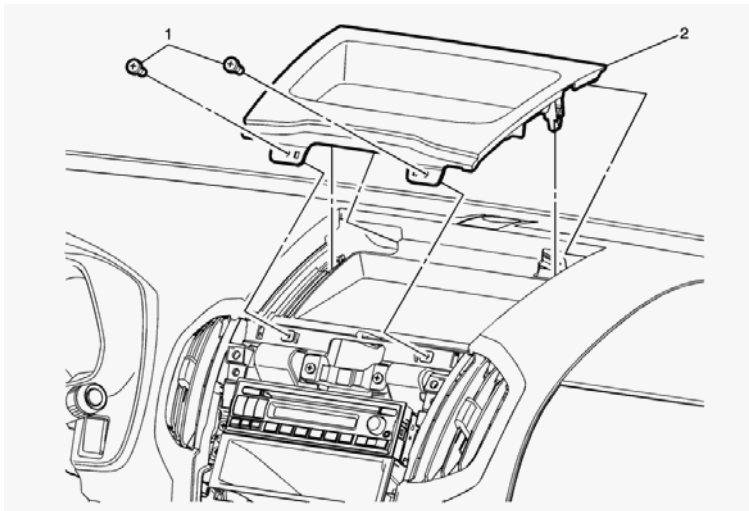

Instrument Panel Accessory Upper Trim Plate Replacement

Callout

Component Name

Preliminary Procedure

1. Remove the instrument panel center trim plate, if applicable. Refer to Instrument Panel Center Trim Plate Replacement.
2. Remove the radio, if applicable. Refer to Radio Replacement.

1

Instrument Panel Accessory Mount Plate Fastener (Qty: 2)

Caution: Refer to Fastener Caution.

Instrument Panel Accessory Upper Trim Plate

2

Procedure


Use a flat bladed plastic trim tool in order to release the retainers securing the instrument panel accessory upper trim plate to instrument panel assembly.

2013 Chevrolet Colorado


Submodel: | **Engine Type:** | **Liters:**
Fuel Delivery: | **Fuel:**

Removal Procedure


1. Disable the SIR system. Refer to SIR Disabling and Enabling.
2. Remove the radio front side door upper speaker. Refer to Radio Front Side Door Upper Speaker Replacement.
3. Remove the front floor console. Refer to Front Floor Console Replacement.
4. If equipped with a floor console without a lid, remove the instrument panel lower extension. Refer to Instrument Panel Lower Extension.
5. Remove the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement.
6. Remove the steering column. Refer to Steering Column Replacement.

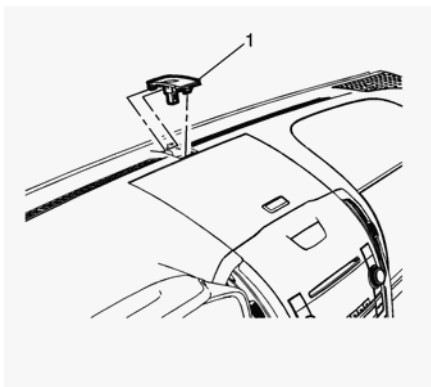


7. Remove the instrument panel upper trim panel cover (1) using a flat bladed trim tool in order to disengage the cover.
8. Disconnect the electrical connection.

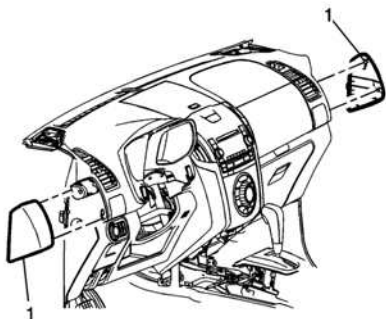

9. Remove the instrument panel outer trim covers (1) using a flat bladed trim tool in order to disengage the retainers.

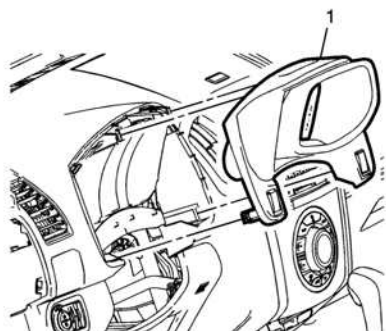


10. Remove the instrument panel cluster trim plate (1) using a flat bladed trim tool in order to disengage the retainers.
11. Disconnect electrical connections, if applicable.

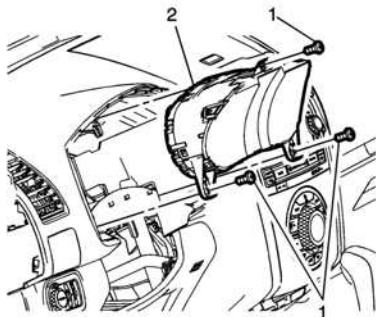


12. Remove the 3 fasteners (1) securing the instrument cluster assembly (2) to the instrument panel assembly.
13. Disconnect the electrical connector.
14. Remove the heater and air conditioning control assembly. With automatic HVAC, refer to Heater and Air Conditioning Control Replacer manual HVAC refer to Heater and Air Conditioning Control Replacement.

Note: Confirm the radio RPO (UGQ or UGP) to ensure the proper procedure is performed.


15. Remove the radio. Refer to Radio Replacement.

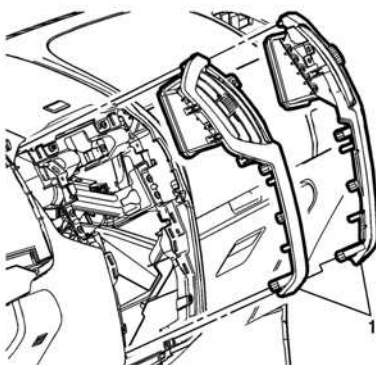


16. Remove the instrument panel center air outlet grille (1) using a flat bladed trim tool in order to disengage the retainers.

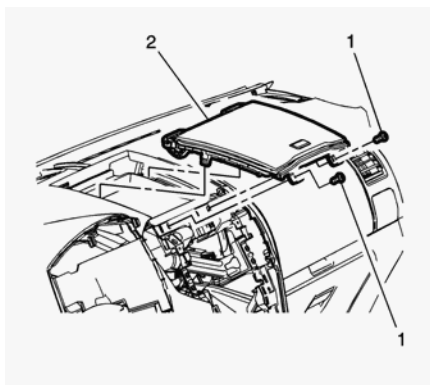


17. Remove the 2 fasteners (1) securing the instrument panel accessory upper trim plate to the instrument panel assembly.

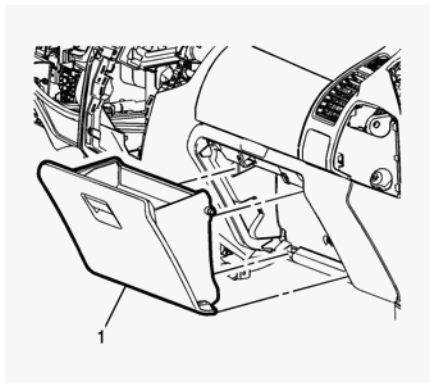


18. Open the instrument panel compartment (1) to the full open position.
19. Squeeze the sides of the compartment assembly and allow the compartment to move past the compartment stops.
20. Unsnap the compartment from the instrument panel assembly.

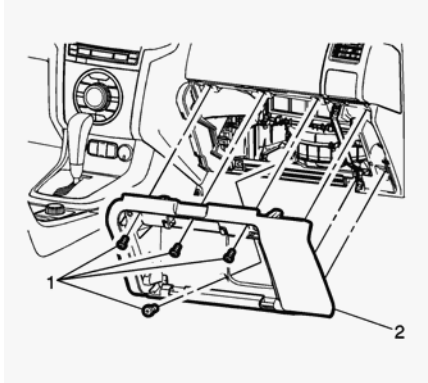


21. Remove the 4 fasteners (1) securing the passenger side instrument lower panel to the instrument panel assembly. Refer to Instrument Replacement.
22. Remove the instrument panel airbag, if equipped. Refer to Instrument Panel Airbag Replacement.

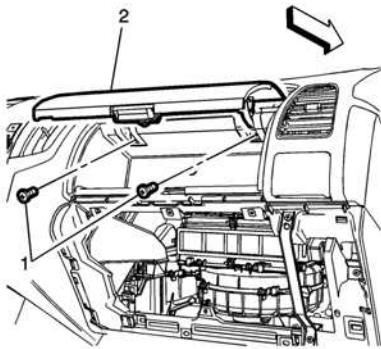

23. Remove the 2 fasteners (1) securing the instrument panel upper compartment to the instrument panel assembly (2).

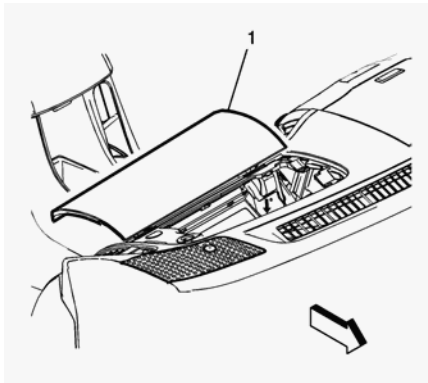


24. Release the tab holding the instrument panel upper compartment (1) to the instrument panel assembly.

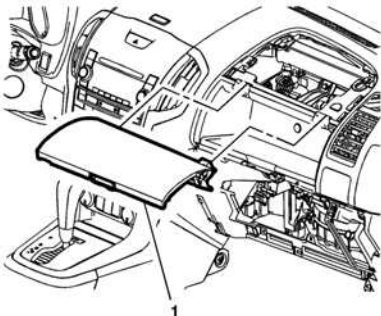


25. Pull out the instrument panel upper compartment (1).


26. Remove the hood primary latch release cable handle. Refer to Hood Primary Latch Release Cable Handle Replacement.
27. Remove the fuel tank filler door latch release cable lever. Refer to Fuel Tank Filler Door Latch Release Cable Lever Replacement.

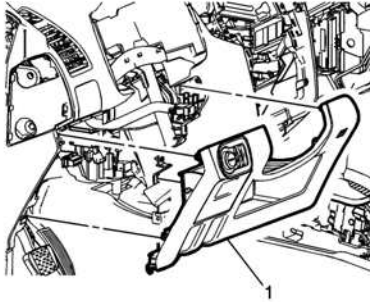


28. Remove the driver side instrument lower panel (1) using a flat bladed trim tool in order to disengage the retainers. Refer to Instrument I Replacement.

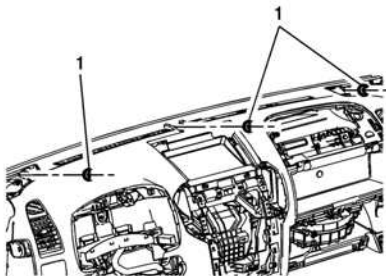


29. Remove the 3 nuts (1) securing the upper part of the instrument panel assembly.

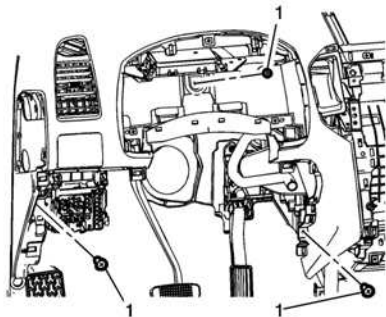

30. Remove the 3 fasteners (1) securing the driver side of the instrument panel assembly.

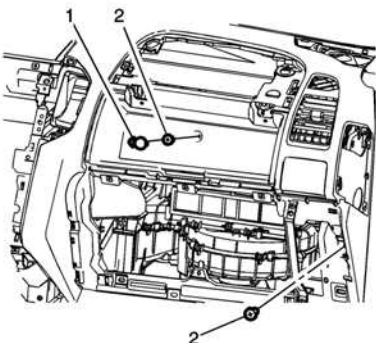


31. Release the instrument panel bolt cover (1) to access the fastener.
32. Remove the 2 fasteners (2) securing the passenger side of the instrument panel assembly.

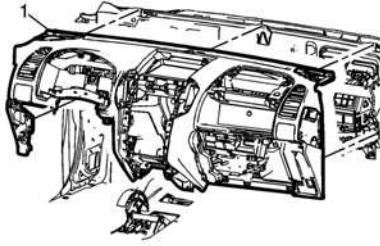


33. Note the location and routing of the instrument panel electrical harness assembly, to ensure proper reinstallation.
34. Disconnect the fasteners securing the instrument panel electrical harness assembly to the instrument panel assembly and position out
35. With the aid of an assistant lift the instrument panel assembly (1) rearward and upward away from the tie bar assembly.
36. Remove the instrument panel assembly from the vehicle.

Installation Procedure


1. With the aid of an assistant, position the instrument panel assembly into the vehicle.
2. Reposition the instrument panel wiring harness into vehicle position as was noted in the removal process and connect the fasteners to instrument panel wiring harness to the instrument panel assembly.

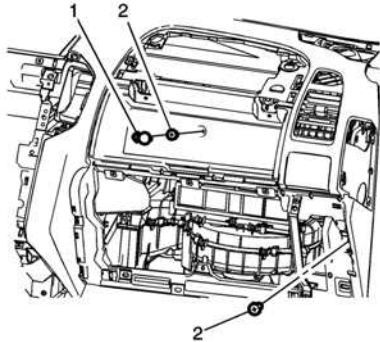

3. Install the 2 fasteners (1) securing the passenger side of the instrument panel assembly.
4. Secure the instrument panel bolt cover (1) to the instrument panel assembly.

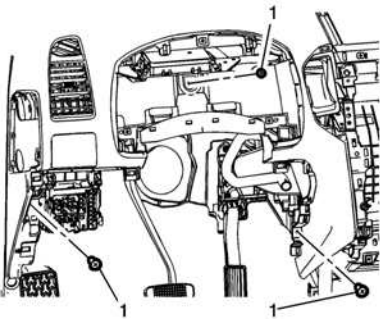


5. Install the 3 fasteners (1) securing the driver side of the instrument panel assembly.

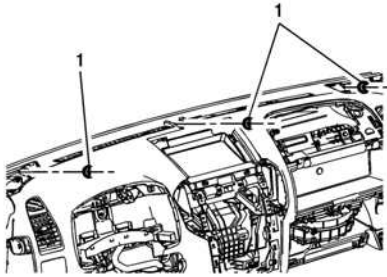


Caution: Refer to Fastener Caution.


6. Install the 3 nuts (1) securing the upper part of the instrument panel assembly and tighten to **8 Y (71 lb in)**.

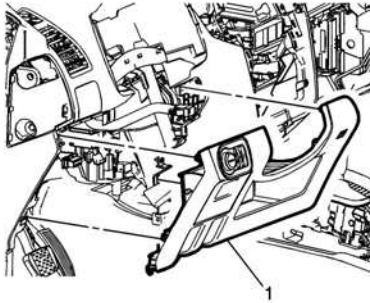


7. Install the driver side instrument lower panel (1) into the instrument panel assembly. Refer to Instrument Lower Panel Replacement.
8. Install the fuel tank filler door latch release cable level. Refer to Fuel Tank Filler Door Latch Release Cable Lever Replacement.
9. Install the hood primary latch release cable handle. Refer to Hood Primary Latch Release Cable Handle Replacement.

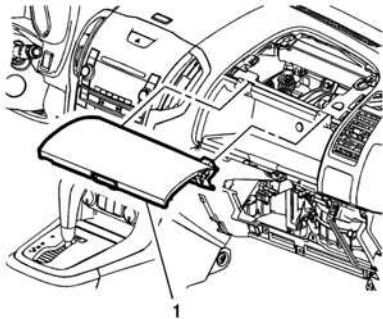


10. Install the instrument panel upper compartment (1).

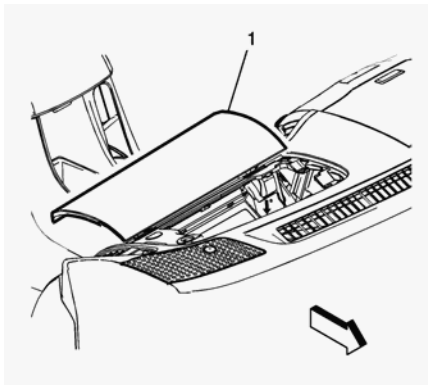


11. Engage the tab holding the instrument panel upper compartment (1) to the instrument panel assembly.

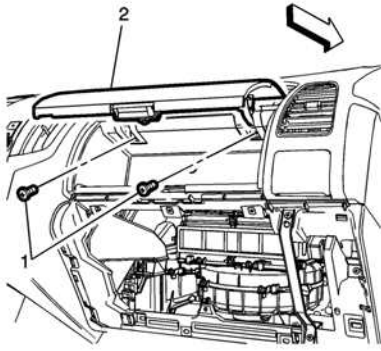


12. Install the 2 fasteners (1) securing the instrument panel upper compartment to the instrument panel assembly (2).
13. Install the instrument panel airbag, if equipped. Refer to Instrument Panel Airbag Replacement.

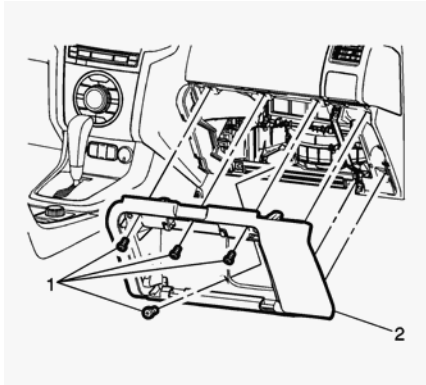


14. Install the 4 fasteners (1) securing the passenger side instrument lower panel to the instrument panel assembly. Refer to Instrument Lower Panel Replacement.
15. Snap the compartment to the instrument panel assembly.

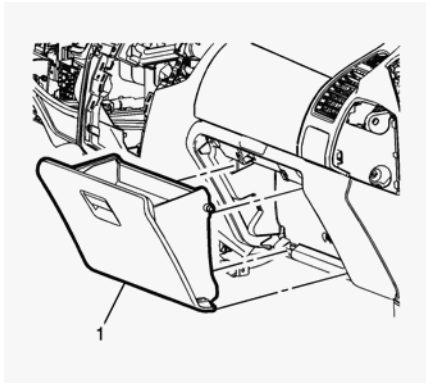


16. Squeeze the sides of the instrument compartment assembly (1) and allow the compartment to move into the compartment stops.

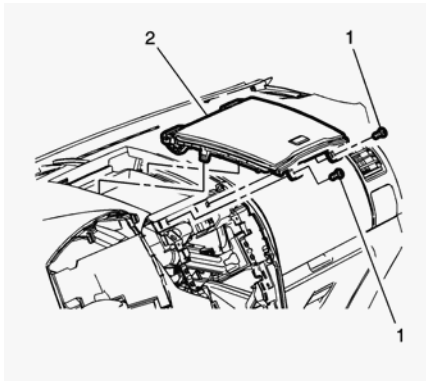


17. Install the 2 fasteners (1) securing the instrument panel accessory upper trim plate to the instrument panel assembly.

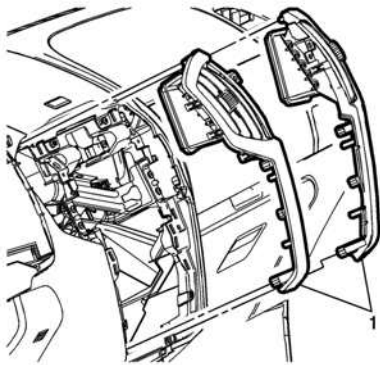


18. Install the instrument panel center air outlet grille (1) to the instrument panel assembly.
19. Install the radio. Refer to Radio Replacement.
20. Install the heater and air conditioning control assembly. With automatic HVAC, refer to Heater and Air Conditioning Control Replacement manual HVAC refer to Heater and Air Conditioning Control Replacement.
21. Connect the electrical connection.

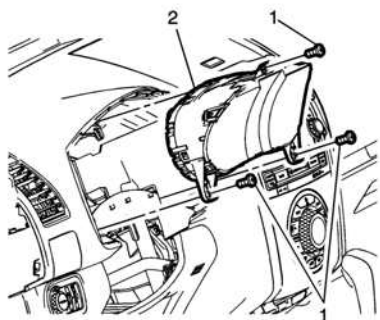


22. Install the 3 fasteners (1) securing the instrument cluster assembly (2) to the instrument panel assembly.
23. Connect electrical connections, if applicable.

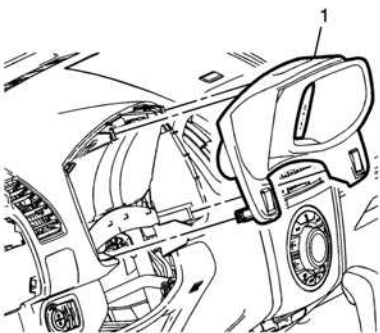

24. Install the instrument panel cluster trim plate (1) to the instrument panel assembly.

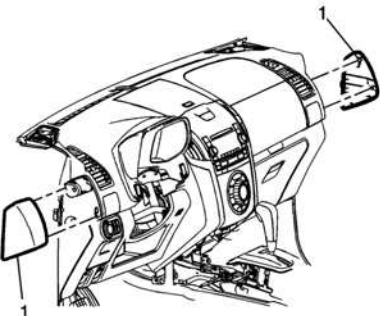

25. Install the instrument panel outer trim covers (1) to the instrument panel assembly.

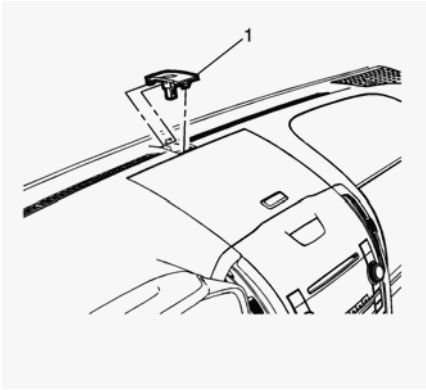


26. Connect the electrical connection.
27. Install the instrument panel upper trim panel cover (1) to the instrument panel assembly.
28. For programming and set up information refer to Control Module References.
29. Install the steering column. Refer to Steering Column Replacement.
30. Install the front floor console. Refer to Front Floor Console Replacement.
31. If equipped with a floor console without a lid, install the instrument panel lower extension. Refer to Instrument Panel Lower Extension I
32. Install the windshield side garnish molding. Refer to Windshield Side Garnish Molding Replacement.
33. Install the radio front side door upper speaker. Refer to Radio Front Side Door Upper Speaker Replacement.
34. Enable the SIR system. Refer to SIR Disabling and Enabling

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

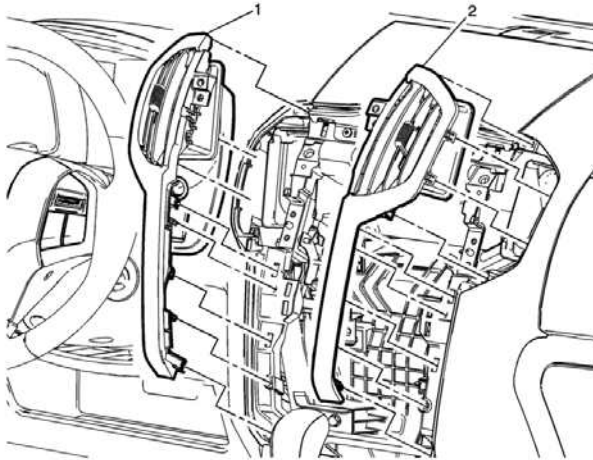

Instrument Panel Center Air Outlet Grille Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the instrument panel center trim plate, if equipped with (UGP) radio. Refer to Instrument Panel Center Trim Plate Replacement.
2. Remove the radio, if equipped with (UGQ) radio. Refer to Radio Replacement.

Instrument Panel Center Air Outlet Grille– Left Hand

1 Procedure

Use a flat bladed plastic trim tool in order to release the retainers securing the instrument panel center air outlet grille to the instrument panel assembly.


Instrument Panel Center Air Outlet Grille– Right Hand

2 Procedure

Use a flat bladed plastic trim tool in order to release the retainers securing the instrument panel center air outlet grille to the instrument panel assembly.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

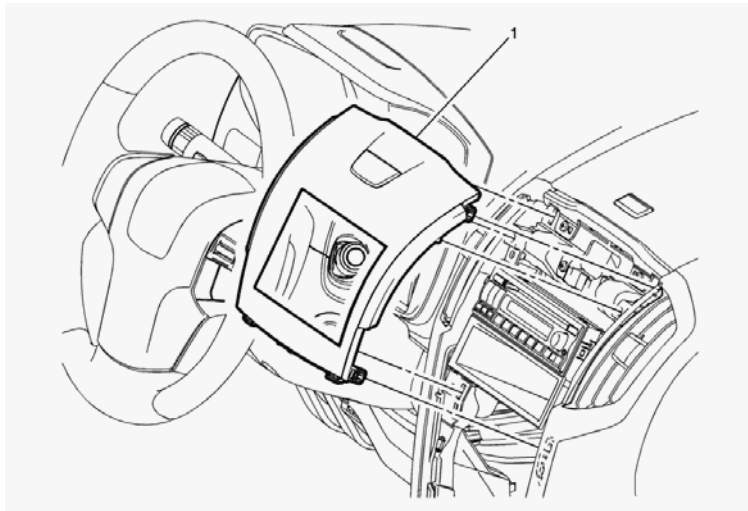

Instrument Panel Center Trim Plate Replacement

Callout

Component Name

Preliminary Procedure

1. Remove the heater and air conditioning control, if equipped with automatic HVAC. Refer to Heater and Air Conditioning Control Replacement.
2. Remove the heater and air conditioning control, if equipped with manual HVAC. Refer to Heater and Air Conditioning Control Replacement.

Instrument Panel Center Trim Plate

Procedure


1

1. Use a flat bladed plastic trim tool in order to release the retainers securing the instrument panel center trim plate to the instrument panel assembly.
2. Disconnect the electrical connections.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

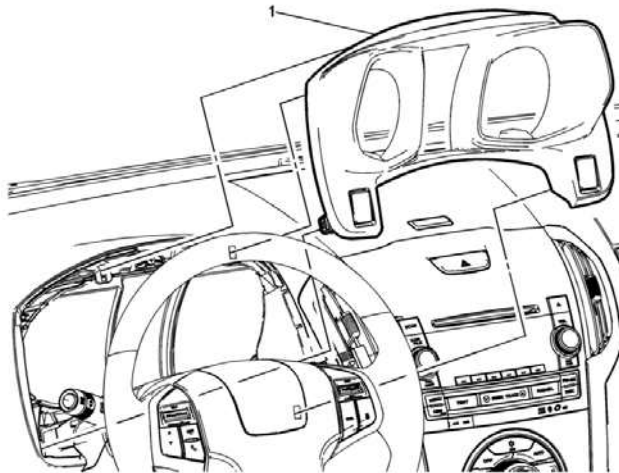

Instrument Panel Cluster Trim Plate Replacement

Callout

Component Name

Instrument Panel Cluster Trim Plate Assembly

Procedure


1

1. Use a flat bladed plastic trim tool in order to release the retainer clips securing the cluster trim plate to the instrument panel assembly.
2. Disconnect electrical connections, if applicable.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

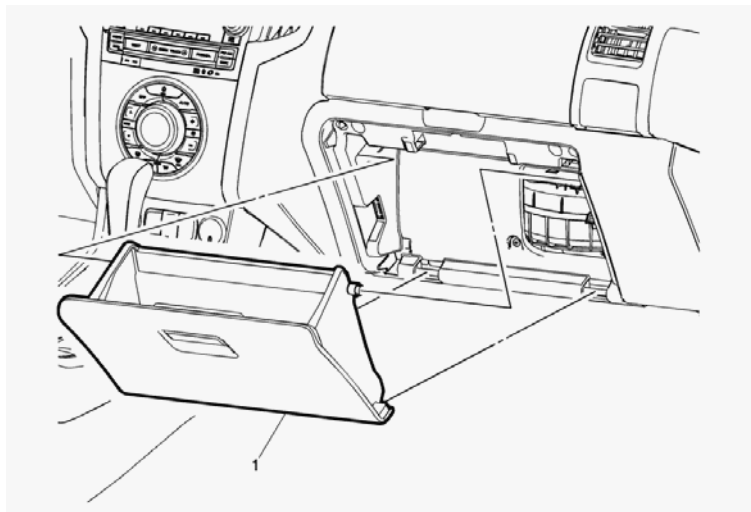

Instrument Panel Compartment Door Replacement

Callout

Component Name

Instrument Panel Compartment Door Assembly

1


Procedure

Squeeze the sides of the instrument panel compartment door assembly allowing the compartment to open past the stops.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

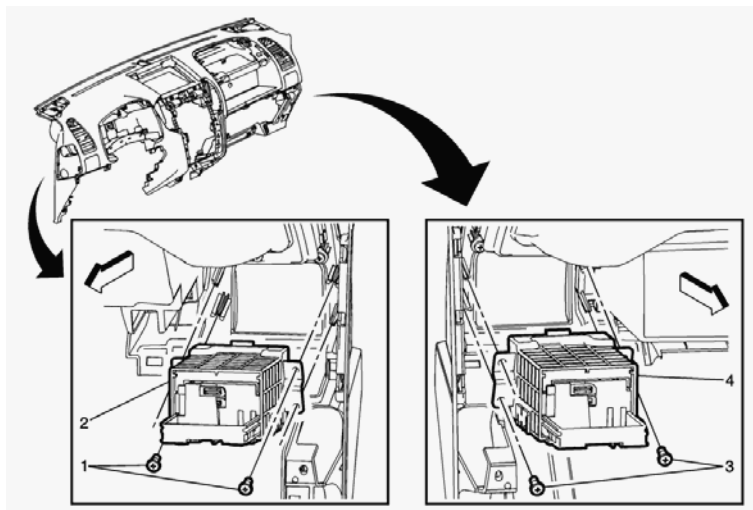

Instrument Panel Cup Holder Replacement

Callout

Component Name

Preliminary Procedure


Remove the instrument panel assembly. Refer to Instrument Panel Assembly Replacement.

- | | |
|---|--|
| 1 | Instrument Carrier Bolt (Qty: 2)
Caution: Refer to Fastener Caution. |
| 2 | Instrument Panel Cup Holder - Driver Side |
| 3 | Instrument Carrier Bolt (Qty: 2)
Caution: Refer to Fastener Caution. |
| 4 | Instrument Panel Cup Holder - Passenger Side |

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

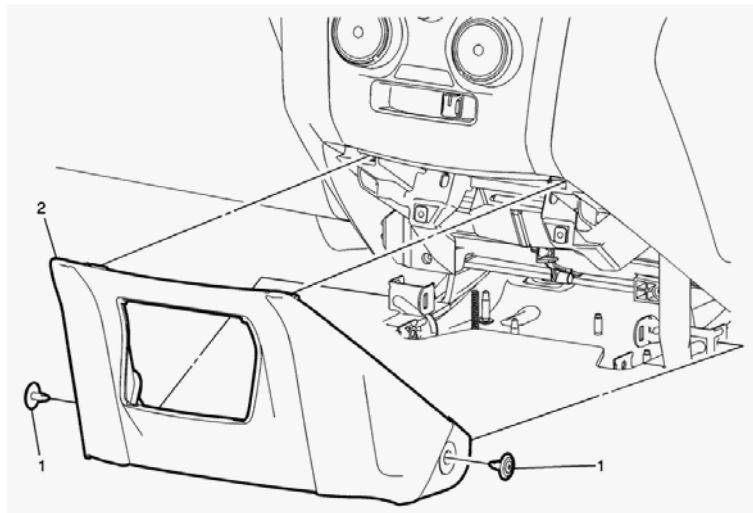

Instrument Panel Lower Extension Replacement

Callout

Component Name

Preliminary Procedure

Remove the instrument panel accessory bezel. Refer to Instrument Panel Accessory Bezel Replacement.

- 1 Instrument Panel Lower Extension Trim Panel Retainers (Qty: 2)


Caution: Refer to Fastener Caution.

- 2 Instrument Panel Lower Extension

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

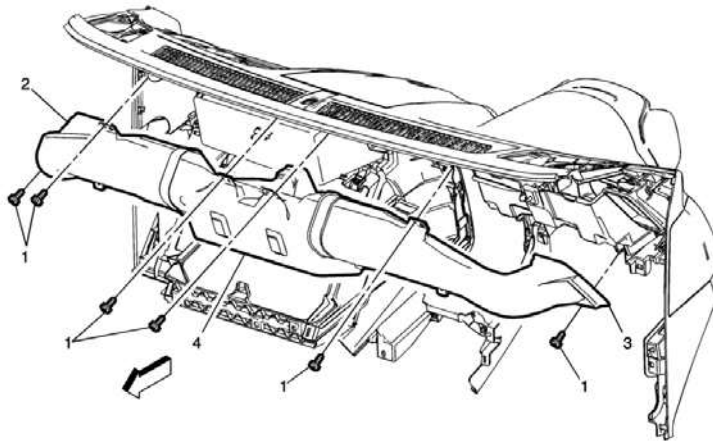

Instrument Panel Outer Air Outlet Duct Replacement

Callout

Component Name

Preliminary Procedure

Remove the windshield defroster nozzle duct. . Refer to Windshield Defroster Nozzle Duct Replacement.

1 Instrument Panel Outer Air Outlet Duct Screw (Qty: 6)

Caution: Refer to Fastener Caution.


2 Instrument Panel Outer Air Outlet Duct – Passenger

3 Instrument Panel Outer Air Outlet Duct – Driver

4 Instrument Panel Center Air Outlet Duct

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

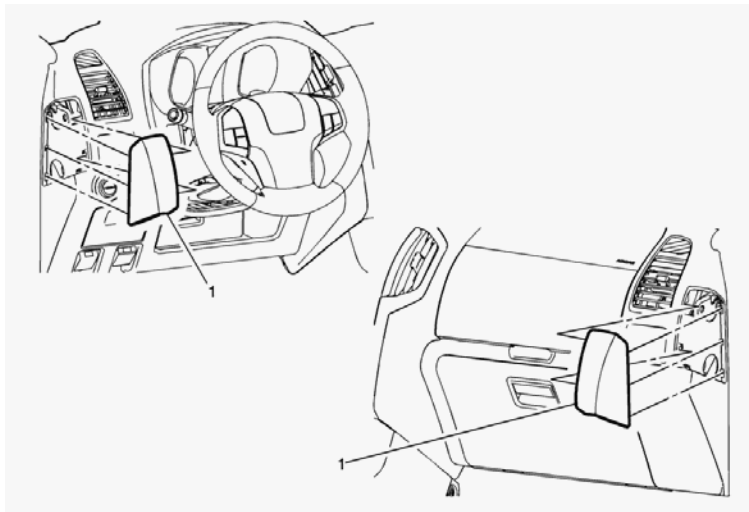

Instrument Panel Outer Trim Cover Replacement

Callout

1

Component Name


Instrument Panel Outer Trim Cover

Procedure

Use a flat bladed plastic trim tool in order to release the retainers securing the outer trim cover to the instrument panel assembl

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

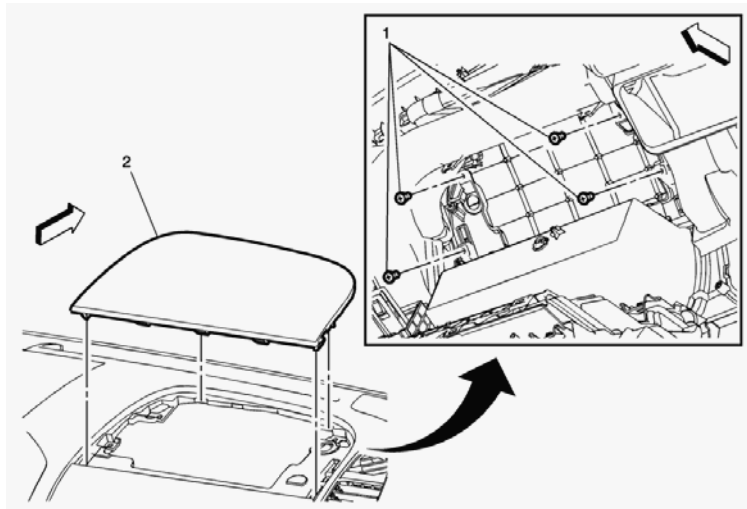

Instrument Panel Outer Trim Cover Replacement

Callout

Component Name

Preliminary Procedure

Remove the instrument panel assembly. Refer to Instrument Panel Assembly Replacement.

1

Instrument Carrier Bolt (Qty: 4)

Caution: Refer to Fastener Caution.

Instrument Panel Outer Trim Cover - Upper


2

Procedure

Use a flat bladed plastic trim tool in order to release the cover from the instrument panel assembly.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

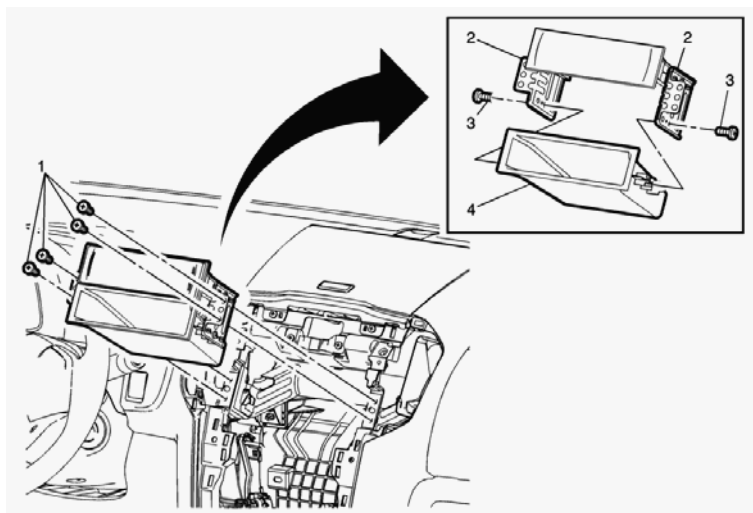

Instrument Panel Stowage Tray Replacement

Callout

Component Name

Preliminary Procedure

Remove the instrument panel center air outlet grille. Refer to Instrument Panel Center Air Outlet Grille Replacement.

Radio Bracket Bolt (Qty: 4)

Caution: Refer to Fastener Caution.

1

Tighten

8 Y (71 lb in)

2

Radio Bracket (Qty: 2)

Instrument Panel Tray Bolt (Qty: 2)

3

Tighten

2 Y (18 lb in)

4


Instrument Panel Stowage Tray

2013 Chevrolet Colorado


Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

Removal Procedure


1. Remove the Instrument panel assembly. Refer to Instrument Panel Assembly Replacement.

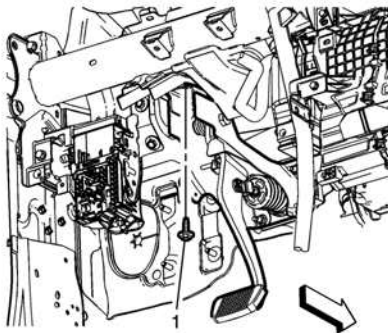


2. Remove the bolt (1) securing the instrument panel tie bar to the break pedal assembly.

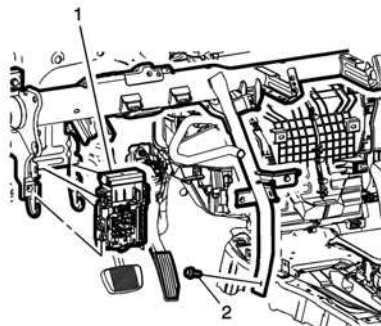


3. Unsnap the instrument panel fuse block (1) from the instrument panel tie bar assembly and position out of the way.
4. Remove the bolt (2) securing the instrument panel tie bar brace to the floor panel.

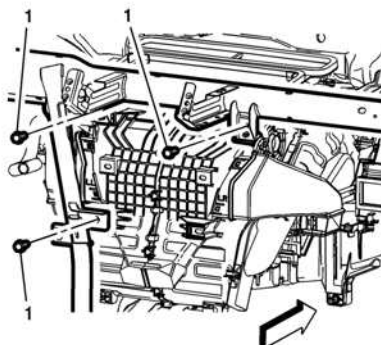

5. Remove the 3 bolts (1) securing the instrument panel tie bar assembly to the heater module.

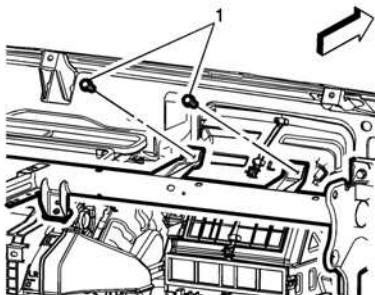


6. Remove the 2 bolts (1) securing the instrument panel tie bar assembly to the blower module.

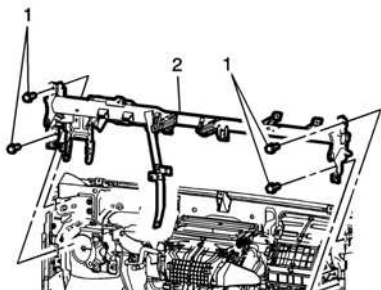


7. Remove the bolts (1) securing the instrument panel tie bar assembly (2) to the vehicle body.
8. Note the location and routing of the instrument panel wiring harness in order to ensure proper installation.
9. Support the HVAC module in order to prevent damage.
10. With the aid of an assistant remove the instrument panel tie bar assembly (2) from the vehicle.

Installation Procedure


1. With the aid of an assistant position the instrument panel tie bar assembly into the vehicle.
2. Install the instrument panel wiring harness assembly to its in vehicle position as it was noted in the removal procedure.

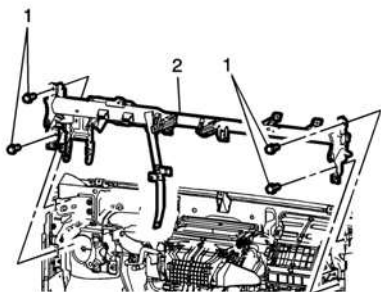


3. Loosely install the bolts (1) securing the instrument panel tie bar assembly (2) to the vehicle body.

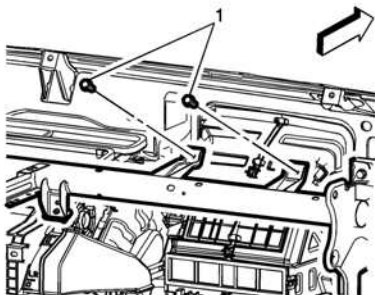


4. Loosely install the bolts (1) securing the instrument panel tie bar assembly to the blower module.

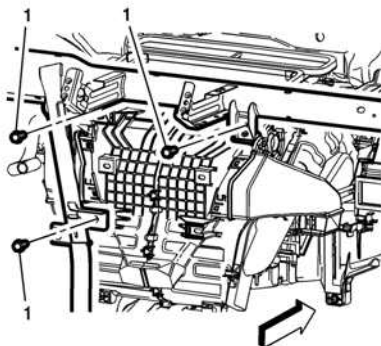

5. Loosely install the bolts (1) securing the instrument panel tie bar assembly to the heater module.

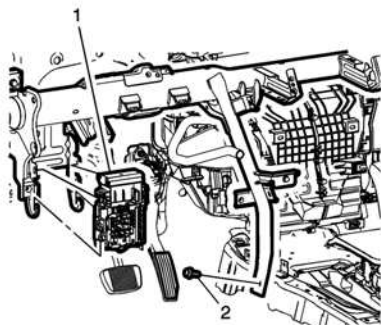

6. Loosely install the bolt (2) securing the instrument panel tie bar brace to the floor panel.
7. Install the instrument panel fuse block (1) onto the instrument panel tie bar assembly.

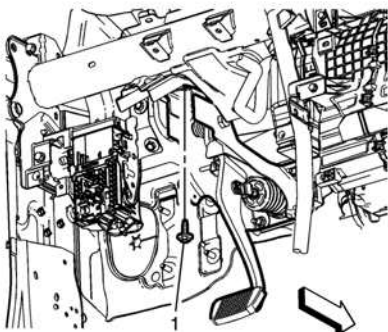

8. Loosely install the bolt (1) securing the instrument panel tie bar to the brake pedal assembly.

Caution: Refer to Fastener Caution.


9. Tighten the instrument panel tie bar to vehicle body bolts to **19Y (14 lb ft)**.
10. Tighten the instrument panel tie bar to heater module bolts to **6.6Y (58 lb in)**.
11. Tighten the instrument panel tie bar assembly to the blower bolts to **6.6Y (58 lb in)**.

12. Tighten the instrument panel tie bar brace to the floor panel bolt to **8Y (71 lb in)** .
13. Tighten the instrument panel tie bar assembly to the break pedal assembly **22Y (16 lb ft)** .
14. Install the Instrument panel assembly. Refer to Instrument Panel Assembly Replacement.


2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

Removal Procedure

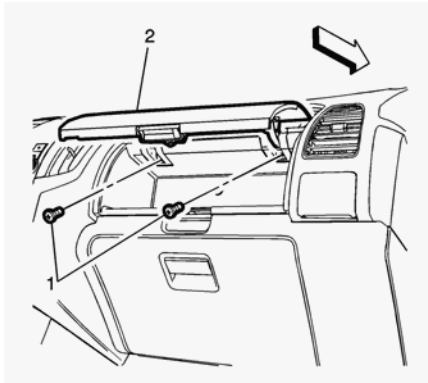


1. Remove the 2 fasteners (1) securing the instrument panel upper compartment to the instrument panel assembly (2).

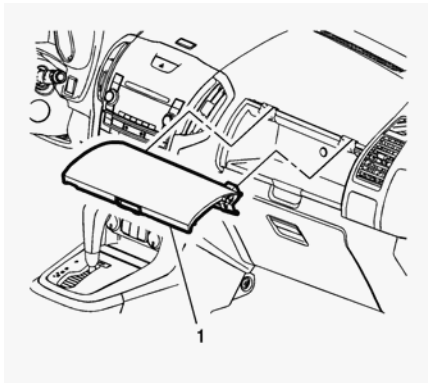


2. Pull out the instrument panel upper compartment (1).

Installation Procedure

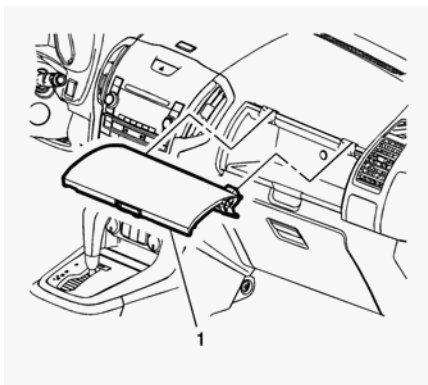

1. Push in the instrument panel upper compartment (1) till the tabs engage.

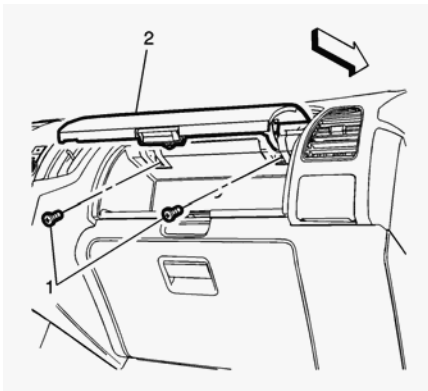


Caution: Refer to Fastener Caution.

2. Install the 2 fasteners (1) securing the instrument panel upper compartment to the instrument panel assembly (2).

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

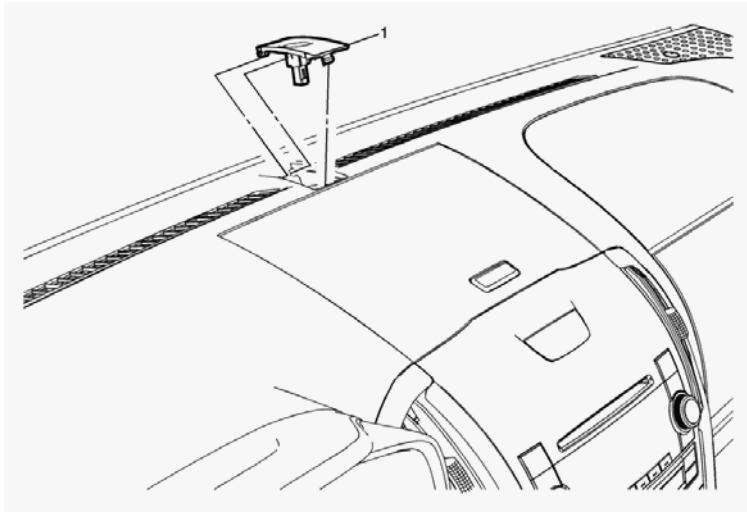

Instrument Panel Upper Trim Panel Cover Replacement

Callout

Component Name

Instrument Panel Upper Trim Panel Cover


Procedure

1

1. Use a flat bladed plastic trim tool in order to release the retainer securing the upper trim panel cover to the instrument panel assembly.
2. Disconnect the electrical connections.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

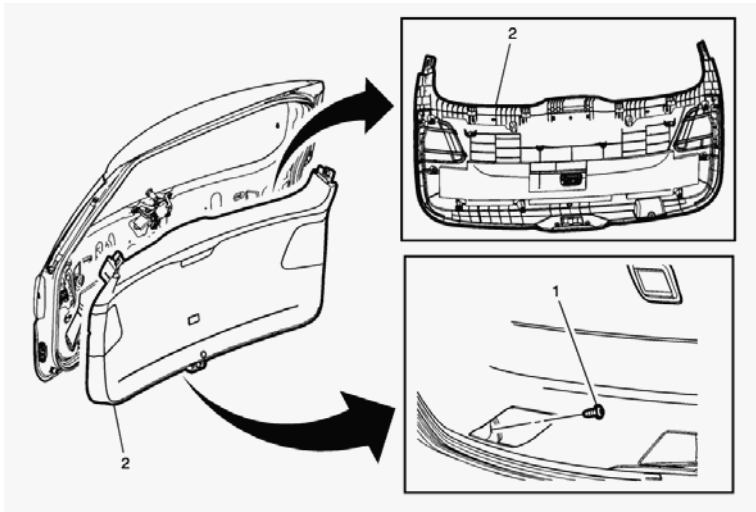


Liftgate Lower Trim Finish Panel Replacement

Callout	Component Name
Preliminary Procedure	
Remove the liftgate upper trim finish panel. Refer to Liftgate Upper Trim Finish Panel Replacement.	
1	Liftgate Lower Trim Finish Panel Fastener Caution: Refer to Fastener Caution.
	Liftgate Lower Trim Finish Panel Assembly
Procedure	
2	1. Use a trim panel removal tool to aid in the removal of the trim panel from the liftgate assembly. 2. Start at the top clip on the right-hand side of liftgate lower trim finish panel. 3. Disconnect the electrical connector, if equipped.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

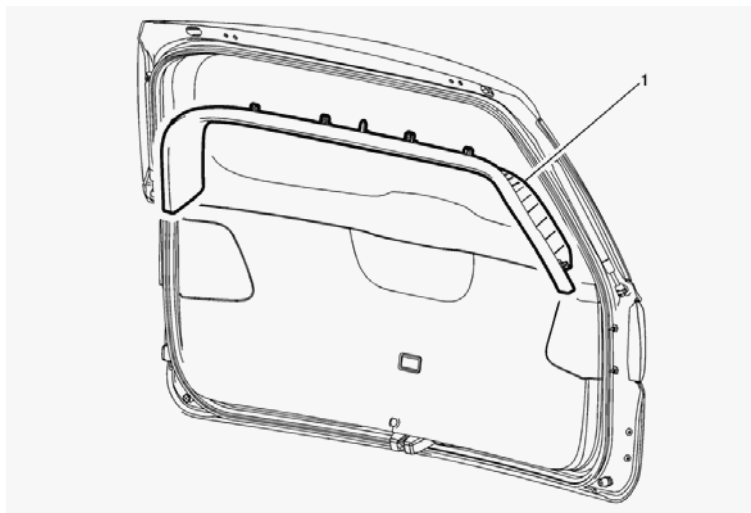

Liftgate Upper Trim Finish Panel Replacement

Callout

1

Component Name


Liftgate Upper Trim Finish Panel Assembly

Procedure

The left and right outboard lower ends of the trim finish panel snap into the liftgate lower trim finish panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

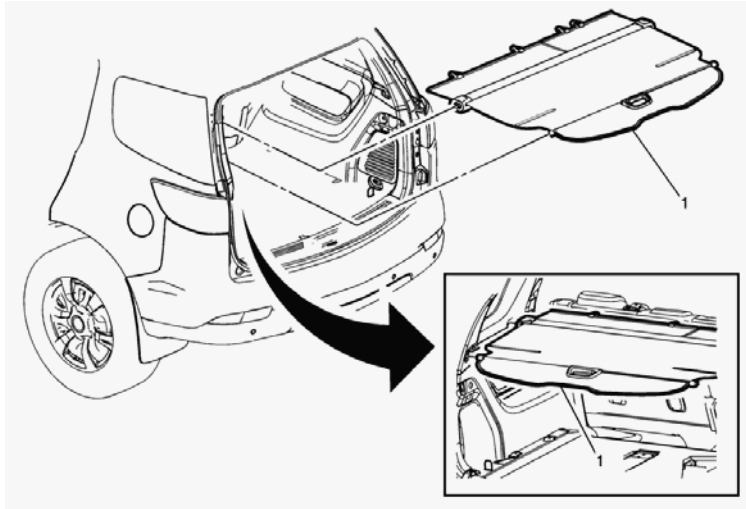

Luggage Shade Replacement

Callout

Luggage Shade Assembly

Component Name


Procedure

1. To remove the cover, do the following:
 1. If the cover is open, pull up on the cover handle to release the cover posts from the retaining slots in the quarter trim panel.
 2. Let the cover move forward to the full retracted position.
 3. Unhook the tabs in the front of the cover from the rear seat back.
 4. Grasping the driver side cover end cap, push the cover end cap toward the passenger side of the vehicle.
 5. Swing the cover rearward and remove it from the vehicle.
2. To install the cover, do the following:
 1. Place the passenger end cap of the cover in the position of the rear quarter trim panel behind the rear seat.
 2. Grasping the driver side cover end cap, push the cover end cap toward the passenger side of the vehicle and lower into place.
 3. Secure the front tabs of the cover into the rear seat back.
 4. Pull the cover rearward and hook into the rear slots in the quarter trim panel to fully extend the cover.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

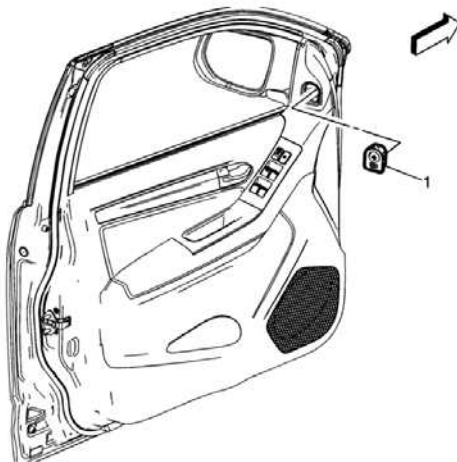

Outside Rearview Mirror Remote Control Switch Bezel Replacement

Callout

Component Name

Outside Rearview Mirror Remote Control Switch Bezel

Procedure


1

1. Use the appropriate plastic trim tool to release the outside rearview mirror remote control switch bezel from the front side door upper trim panel.
2. Disconnect the electrical connector from the switch assembly.
3. Transfer parts as necessary.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

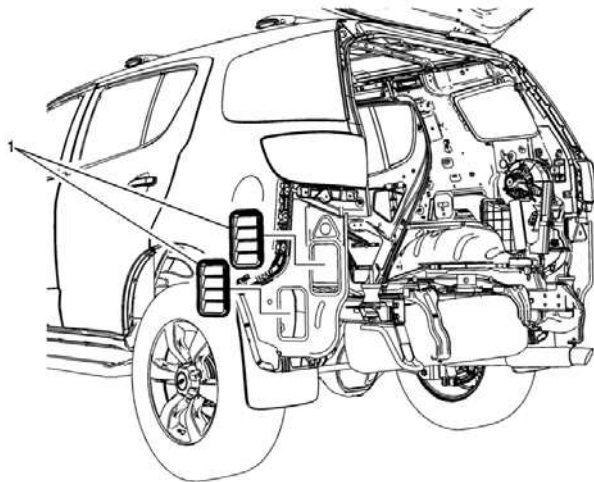

Quarter Outer Panel Pressure Relief Valve Replacement

Callout

Component Name

Preliminary Procedure

Remove the rear bumper fascia. Refer to Rear Bumper Fascia Replacement.

Quarter Outer Panel Pressure Relief Valve (Qty: 2)


1

Procedure

Release the tabs attaching the valves to the inner rear quarter panel to remove the quarter outer panel pressure relief valves.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

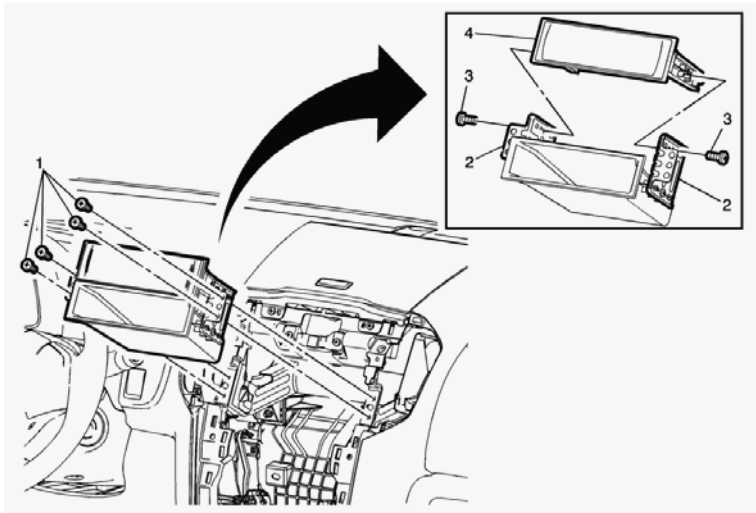


Radio Installation Opening Cover Replacement

Callout	Component Name
Preliminary Procedure	
Remove the instrument panel center air outlet grille. Refer to Instrument Panel Center Air Outlet Grille Replacement.	
Radio Bracket Bolt (Qty: 4)	
1	Caution: Refer to Fastener Caution.
	Tighten
8 Y (71 lb in)	
2	Radio Bracket (Qty: 2)
Radio Opening Cover Bolt (Qty: 2)	
3	Tighten
	2 Y (18 lb in)
4	Radio Opening Cover

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

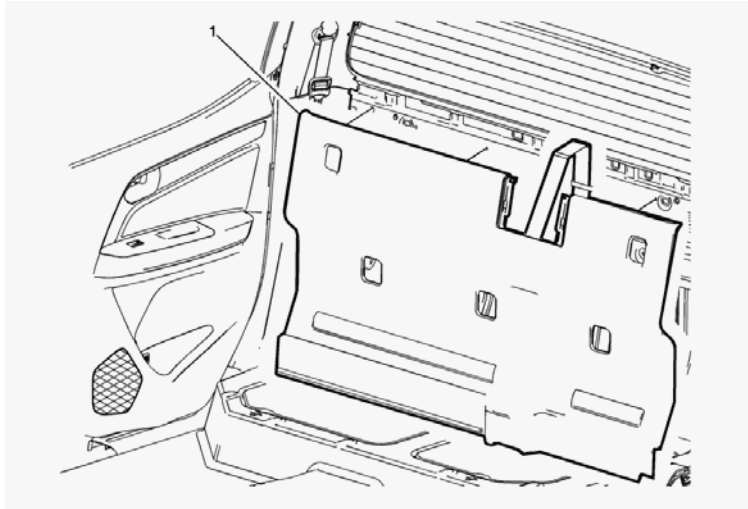

Rear End Trim Finish Panel Replacement

Callout

Component Name

Preliminary Procedure

Remove the rear seat shoulder belt guide cover. Refer to Rear Seat Shoulder Belt Guide Cover Replacement.

Rear End Trim Finish Panel Assembly


Procedure

1

1. Fold the seat back forward.
2. Grasp the lower edge of the rear end trim finish panel and pull to release the retainers from the sheet metal.
3. Raise the panel to unhook it from the sheet metal along the lower edge of the rear window.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

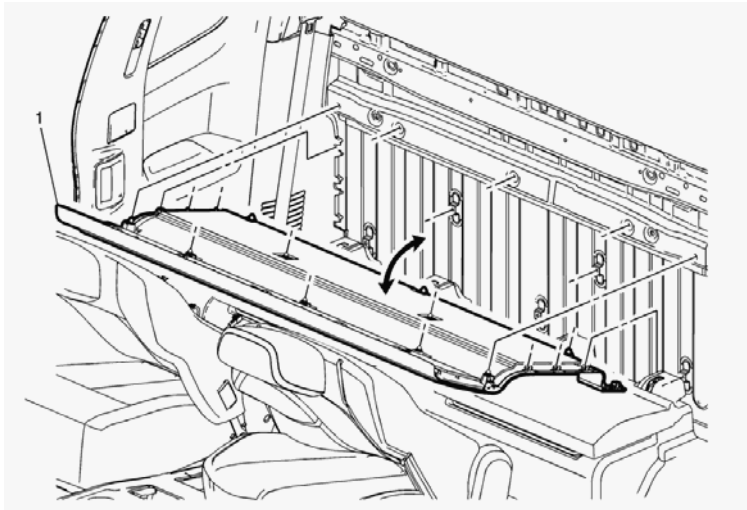

Rear End Trim Finish Panel Replacement

Callout

Component Name

Rear End Trim Finish Panel Assembly


Procedure

1

1. Fold the seat back forward.
2. Grasp the lower edge of the rear end trim finish panel and pull to release the retainers from the sheet metal.
3. Raise the panel to unhook it from the sheet metal along the lower edge of the rear window.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

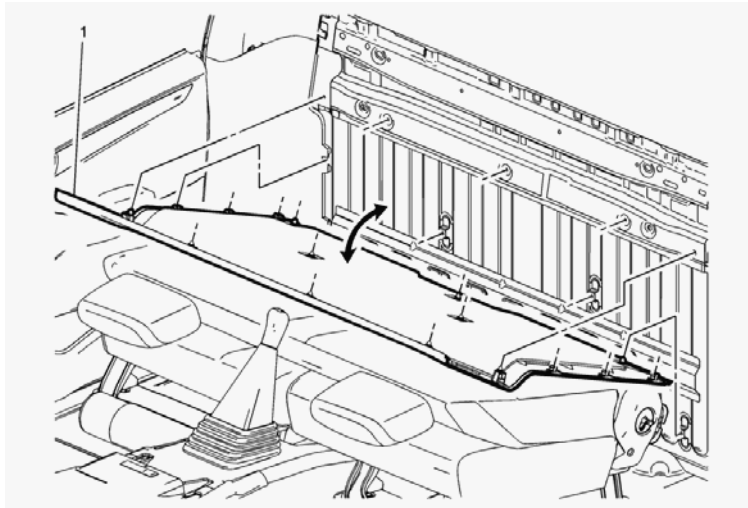

Rear End Trim Finish Panel Replacement

Callout

Component Name

Rear End Trim Finish Panel Assembly


Procedure

1

1. Fold the seat back forward.
2. Grasp the lower edge of the rear end trim finish panel and pull to release the retainers from the sheet metal.
3. Raise the panel to unhook it from the sheet metal along the lower edge of the rear window.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

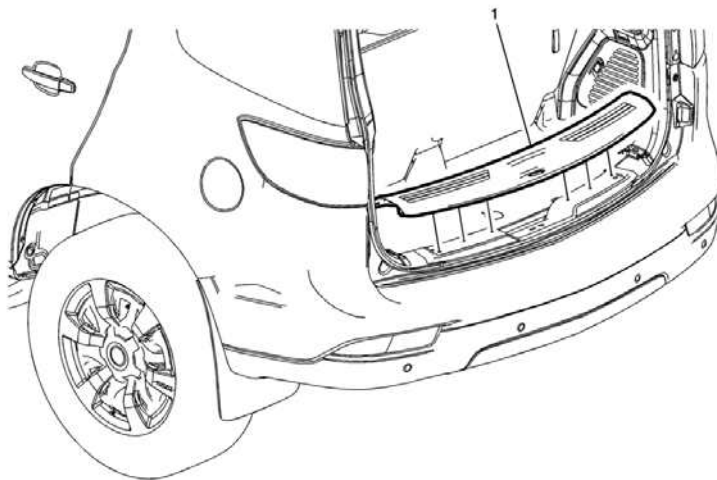

Rear End Trim Finish Panel Replacement

Callout

1

Rear End Trim Finish Panel Assembly


Component Name

Procedure

Grasp and gently pull up on the rear end trim finish panel in order to release the integral retaining clips.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

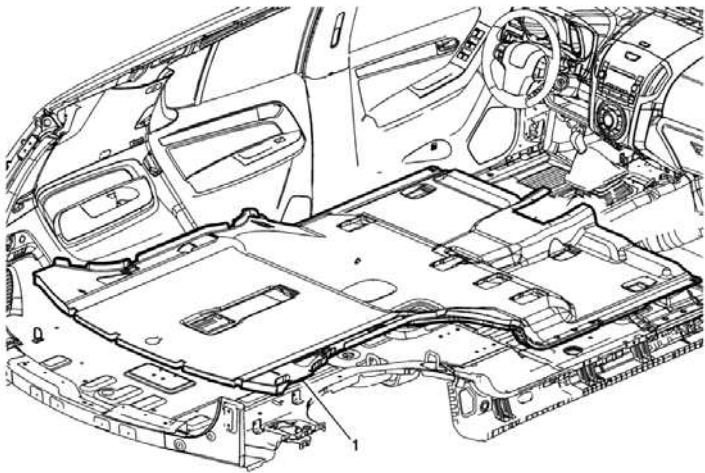

Rear Floor Panel Carpet Replacement

Callout

Component Name

Preliminary Procedures

1. Remove the body hinge pillar trim. Refer to Body Hinge Pillar Trim Replacement.
2. Remove the front seats. Refer to Driver or Passenger Seat Removal and Installation.
3. Remove the center pillar lower trim panel. Refer to Center Pillar Lower Trim Panel Replacement.
4. Remove the rear seat. Refer to Rear Seat Removal and Installation.
5. Remove the 3rd row seat. Refer to 3rd Row Seat Removal and Installation.
6. Remove the left side body side trim panel. Refer to Body Side Trim Panel Replacement - Left Side.
7. Remove the right side body side trim panel. Refer to Body Side Trim Panel Replacement - Right Side.
8. Remove the front floor console. Refer to Front Floor Console Replacement.
9. Remove the fire extinguisher bracket, if equipped. Refer to Fire Extinguisher Bracket Replacement.

Rear Floor Panel Carpet Assembly

1


Procedure

The front floor panel carpet must be installed prior to the rear floor panel carpet.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

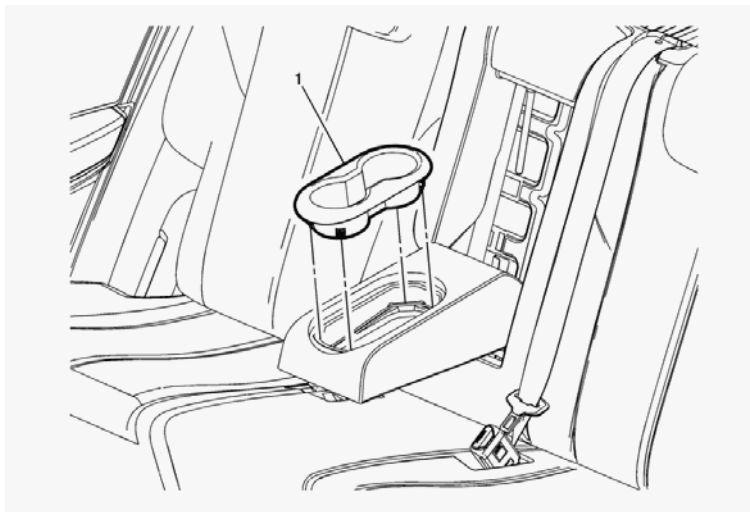

Rear Seat Armrest Cup Holder Replacement

Callout

1

Rear Seat Armrest Cup Holder

Component Name


Procedure

Disengage the rear seat armrest cup holder by pulling upward.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

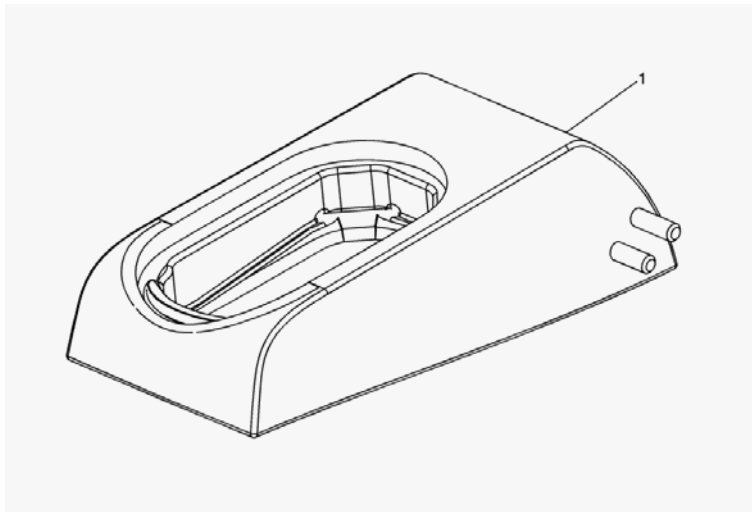

Rear Seat Armrest Frame Replacement

Callout

Component Name

Preliminary Procedure

1. Remove the rear seat armrest cup holder. Refer to Rear Seat Armrest Cup Holder Replacement.
2. Remove the rear seat armrest. Refer to Rear Seat Armrest Replacement.

Rear Seat Armrest Frame

1


Procedure

Transfer components as necessary.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

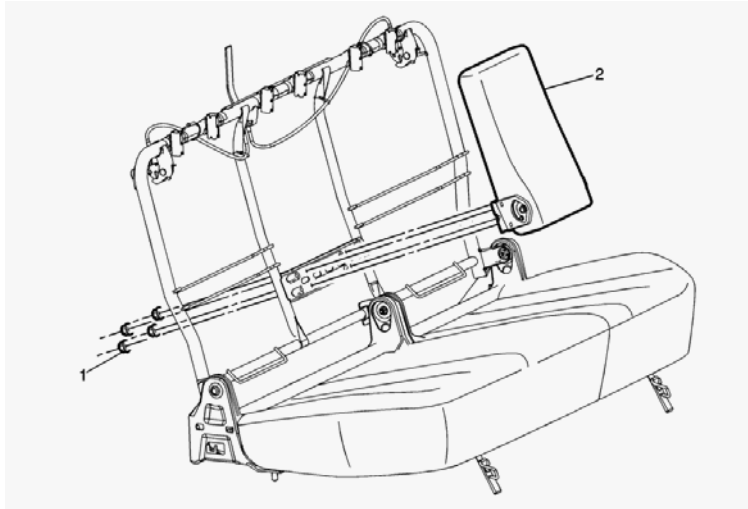

Rear Seat Armrest Replacement

Callout

Component Name

Preliminary Procedure

Open the rear seat back cushion cover. Refer to Rear Seat Back Cushion Cover and Pad Replacement.

Rear Seat Armrest Fastener (Qty: 4)

Caution: Refer to Fastener Caution.

Procedure

1

Fold the rear seat back cushion down to gain access to open the rear seat back cushion cover.

Tighten


20 Y (15 lb ft)

2

Rear Seat Armrest

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

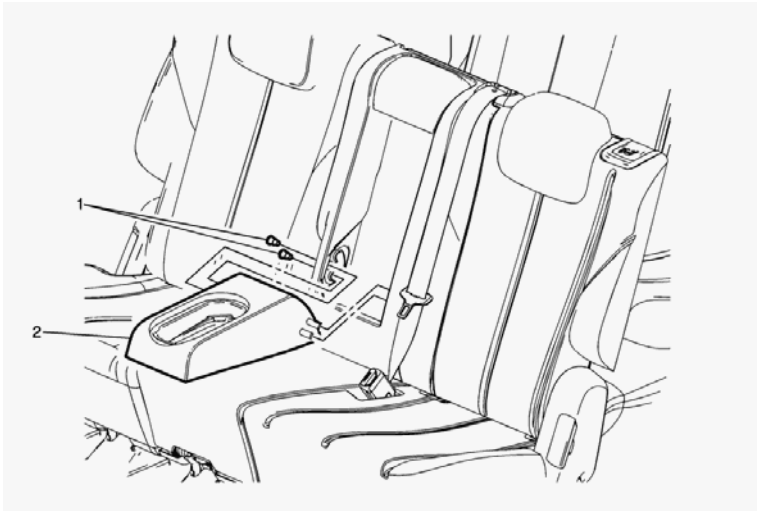


Rear Seat Armrest Replacement

Callout	Component Name
Preliminary Procedure	
1.	Remove the rear seat armrest cup holder. Refer to Rear Seat Armrest Cup Holder Replacement.
2.	Remove the rear seat recliner inner finish cover. Refer to Rear Seat Recliner Inner Finish Cover Replacement.
	Rear Seat Armrest Support Fastener (Qty: 2)
1	Caution: Refer to Fastener Caution.
	Tighten
	9 Y (80 lb in)
2	Rear Seat Armrest Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

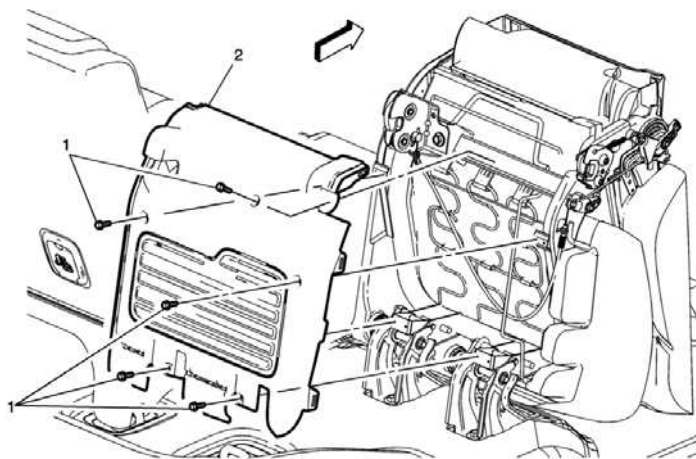

Rear Seat Cushion Trim Panel Replacement

Callout

Component Name


Preliminary Procedure

Remove the rear seat back cushion latch cover. Refer to Rear Seat Back Cushion Latch Cover Replacement.

- | | |
|---|--|
| 1 | Rear Seat Cushion Trim Panel Fastener (Qty: 5)
Caution: Refer to Fastener Caution. |
| 2 | Rear Seat Cushion Trim Panel |

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

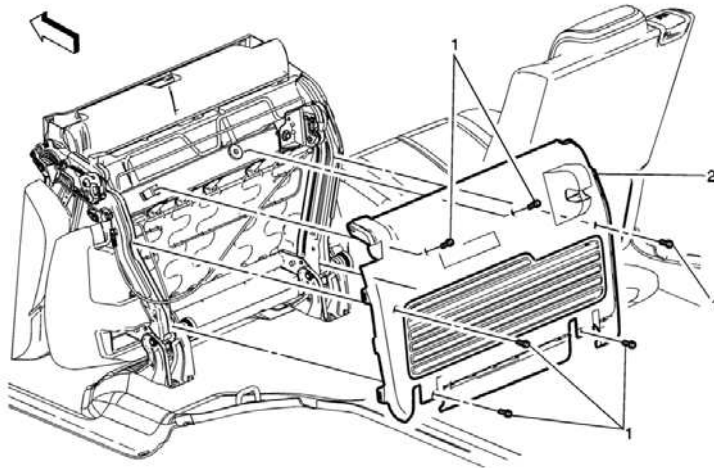

Rear Seat Cushion Trim Panel Replacement

Callout

Component Name

Preliminary Procedure

Remove the rear seat back cushion latch cover. Refer to Rear Seat Back Cushion Latch Cover Replacement.


- 1 Rear Seat Cushion Trim Panel Fastener (Qty: 6)

Caution: Refer to Fastener Caution.

- 2 Rear Seat Cushion Trim Panel

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

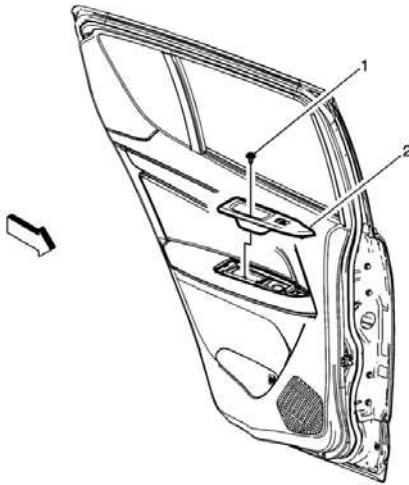

Rear Side Door Armrest Pull Cup Replacement


Callout

Component Name

- | | |
|---|---|
| | Rear Side Door Armrest Pull Cup Fastener |
| 1 | Caution: Refer to Fastener Caution.
Procedure
Use a small flat-bladed tool to open the rear side door trim integral cap to access the fastener. |
| | Rear Side Door Armrest Pull Cup Assembly |
| 2 | Procedure
Disconnect the electrical connector. |

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

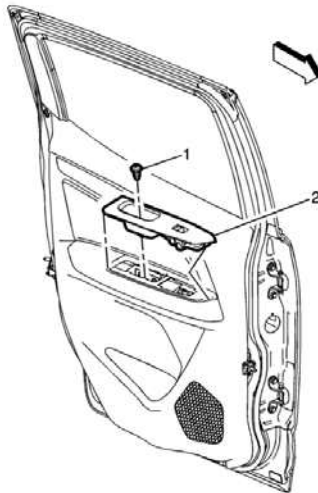

Rear Side Door Pull Handle Trim Finish Panel Replacement

Callout

Component Name

Rear Side Door Trim Panel Fastener

Caution: Refer to Fastener Caution.

Procedure

Use a small flat bladed tool to open the rear side door trim integral cap to access the fastener.

Rear Side Door Pull Handle Trim Finish Panel Assembly


Procedure

Disconnect electrical connector.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

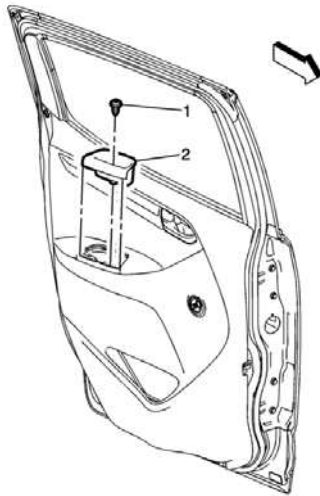

Rear Side Door Pull Handle Trim Finish Panel Replacement

Callout

Component Name

Rear Side Door Trim Panel Fastener

Caution: Refer to Fastener Caution.

Procedure

Use a small flat bladed tool to open the rear side door trim integral cap to access the fastener.

1


2

Rear Side Door Pull Handle Trim Finish Panel Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

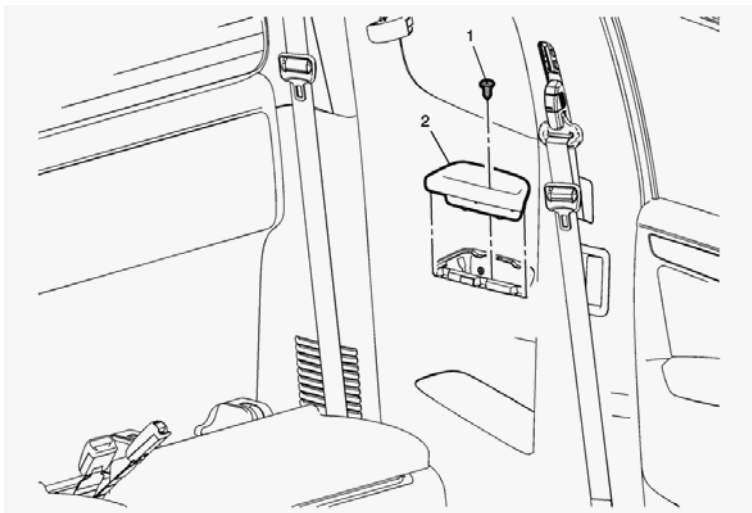

Rear Side Door Pull Handle Trim Finish Panel Replacement

Callout

Component Name

Rear Side Door Trim Panel Fastener

Caution: Refer to Fastener Caution.

Procedure

Use a small flat bladed tool to open the rear side door trim integral cap to access the fastener.

1


2

Rear Side Door Pull Handle Trim Finish Panel Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

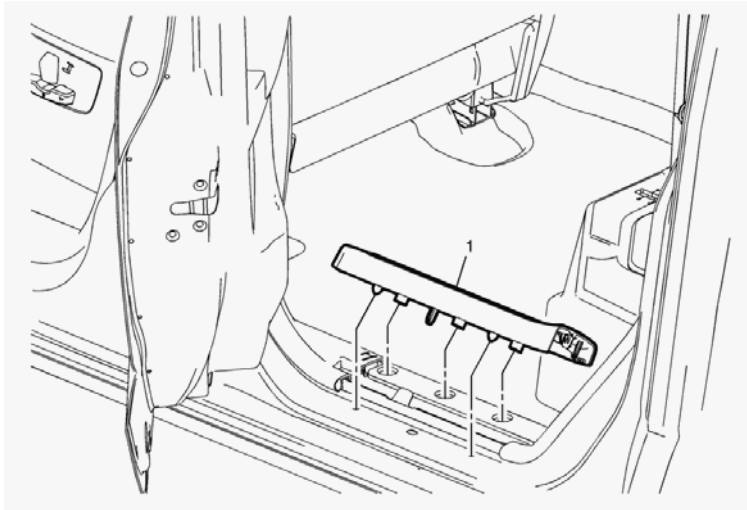

Rear Side Door Sill Trim Plate Replacement

Callout

1

Rear Side Door Sill Trim Plate Assembly

Procedure


Grasp the rear side door sill trim plate and pull the sill plate away from the body to release the fasteners.

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

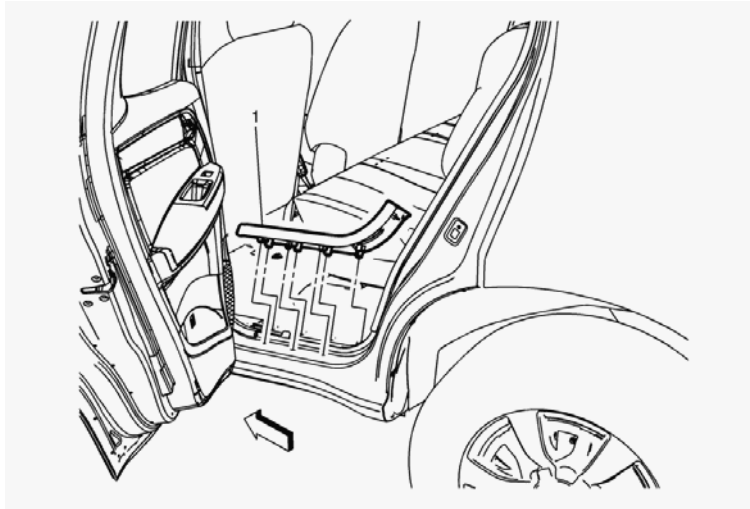

Rear Side Door Sill Trim Plate Replacement

Callout

1

Rear Side Door Sill Trim Plate Assembly

Procedure


Grasp the rear side door sill trim plate and pull the sill plate away from the body to release the retaining clips.

Component Name

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

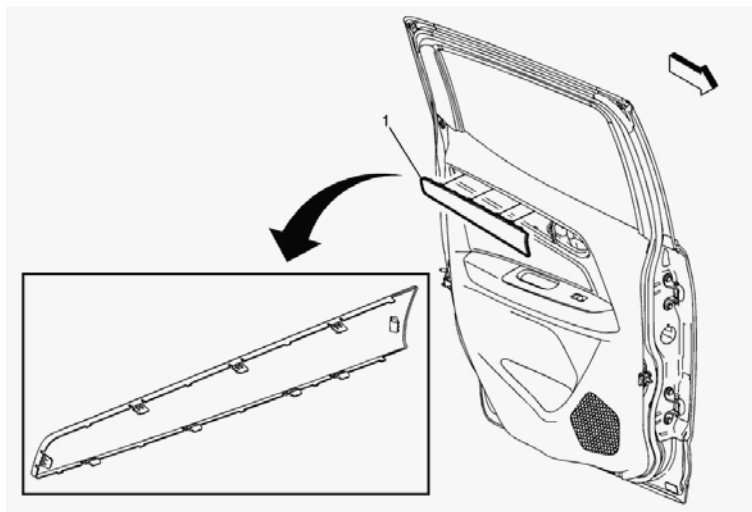

Rear Side Door Trim Panel Applique Replacement

Callout

Component Name

Rear Side Door Trim Panel Applique Assembly


Procedure

Use a small flat-bladed tool to release the integral clips from the rear side door trim panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

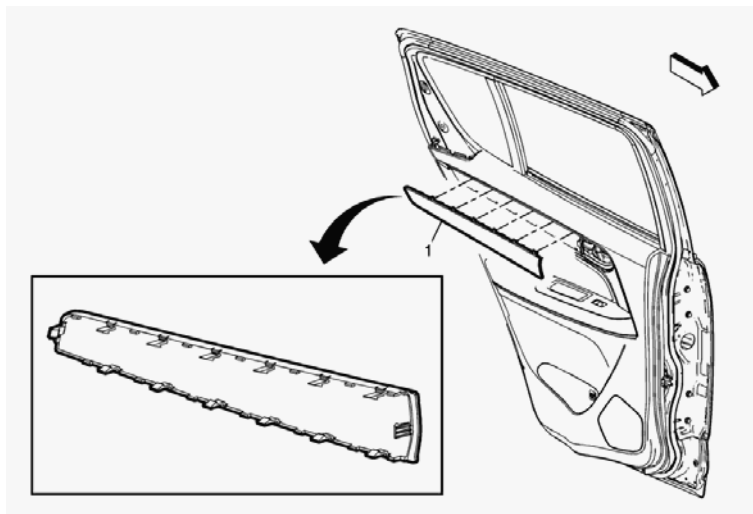

Rear Side Door Trim Panel Applique Replacement

Callout

Component Name

Rear Side Door Trim Panel Applique Assembly


1

Procedure

Use a small flat-bladed tool to release the integral clips from the rear side door trim panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

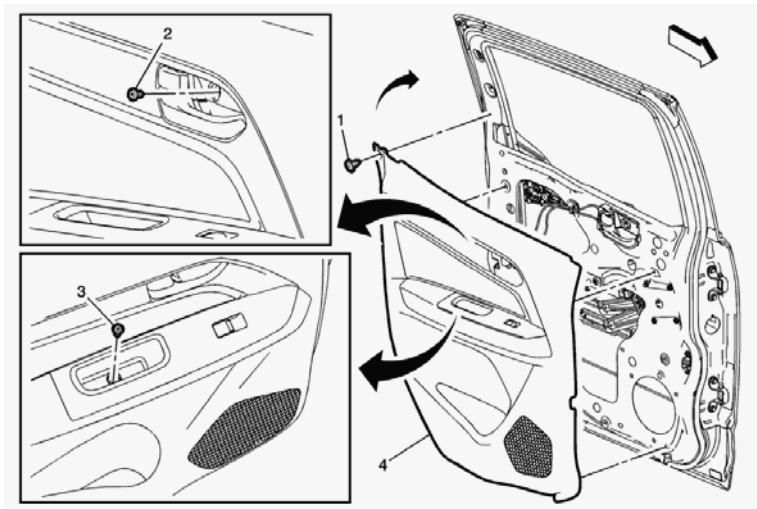


Rear Side Door Trim Panel Replacement

Callout	Component Name
Preliminary Procedures	
1. Place window in full down position.	
2. Remove the rear side door upper rear trim panel. Refer to Rear Side Door Upper Rear Trim Panel Replacement.	
3. Remove the rear side door window regulator handle, if equipped. Refer to Rear Side Door Window Regulator Handle Replacement.	
1	Rear Side Door Trim Panel (Push-in) Retainer Procedure Use a small flat-bladed tool to aid in removal.
2	Rear Side Door Inside Handle Fastener Caution: Refer to Fastener Caution. Procedure Use a small flat-bladed tool to open the rear side door inside handle integral cover to access the fastener.
3	Rear Side Door Trim Panel Fastener Procedure Use a small flat-bladed tool to open the rear side door pull handle integral cover to access the fastener.
Rear Side Door Trim Panel Assembly Procedure	
4	1. Use the appropriate plastic trim tool to aid in the removal of the door trim. 2. Pull upwards on the door lock retainer cable to disengage. 3. Disconnect the electrical connector.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

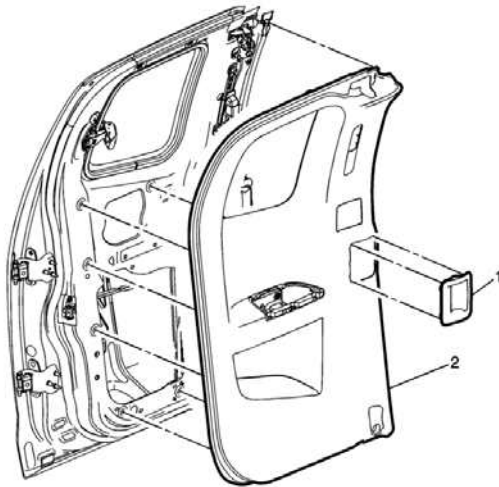

Rear Side Door Trim Panel Replacement

Callout

Component Name

Preliminary Procedure

1. Place window in full down position.
2. Remove the rear side door pull handle trim finish panel. Refer to Rear Side Door Pull Handle Trim Finish Panel Replacement.
3. Remove the seat belt retractor pretensioner. Refer to Seat Belt Retractor Pretensioner Replacement - Front.

Rear Side Door Handle Bezel

1

Procedure

Use a small flat-bladed tool to aid in removal.

Rear Side Door Trim Panel Assembly


2

Procedure

Use the appropriate plastic trim tool to aid in the removal of the door trim panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

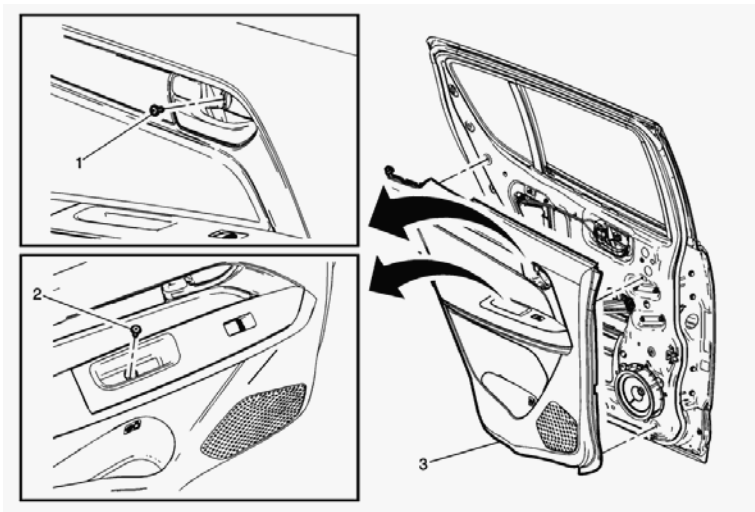


Rear Side Door Trim Panel Replacement

Callout	Component Name
Preliminary Procedures	
1. Place window in full down position. 2. Remove the rear side door upper rear trim panel. Refer to Rear Side Door Upper Rear Trim Panel Replacement. 3. Remove the rear side door window regulator handle, if equipped. Refer to Rear Side Door Window Regulator Handle Replacement.	
1	Rear Side Door Inside Handle Fastener
	Caution: Refer to Fastener Caution.
	Procedure Use a small flat-bladed tool to open the rear side door inside handle integral cover to access the fastener.
2	Rear Side Door Trim Panel Fastener
	Procedure Use a small flat-bladed tool to open the rear side door pull handle integral cover to access the fastener.
3	Rear Side Door Trim Panel Assembly
	Procedure
	1. Use the appropriate plastic trim tool to aid in the removal of the door trim. 2. Pull upwards on the door lock retainer cable to disengage. 3. Disconnect the electrical connector.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

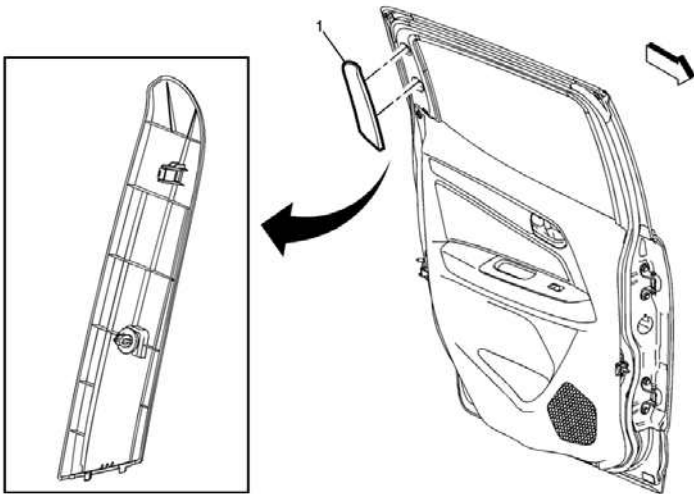

Rear Side Door Upper Rear Trim Panel Replacement

Callout

Component Name

Rear Side Door Upper Rear Trim Panel Assembly

1


Procedure

Use the appropriate plastic trim tool to release the rear side door upper rear trim panel from the rear side door inner panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

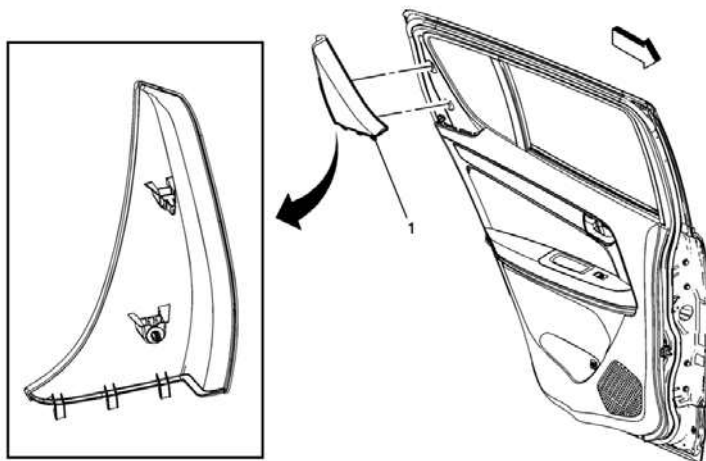

Rear Side Door Upper Rear Trim Panel Replacement

Callout

Component Name

Rear Side Door Upper Rear Trim Panel Assembly

1

Procedure

Use the appropriate plastic trim tool to release the rear side door upper rear trim panel from the rear side door inner panel.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

If the wire insulation has been chafed, or broken, enough to show the conductive portion of the wire, and the wire is not damaged, determine the length of insulation that needs to be repaired. If the repair is less than 280 mm (11 in), cut the wire within the damaged area. Then slide the appropriate heat shrink tubing (listed below) over the wire, and repair the wire by splicing the wires together. Refer to Splicing Copper Wire Using Splice Sleeves. Once the wire is spliced together slide heat shrink tubing over the damaged area and apply heat to seal the repaired wire.

If the wire is damaged, or the damaged area is larger than 280 mm (11 in), then replace the damaged wire by splicing in a new section of wire. Refer to Splicing Copper Wire Using Splice Sleeves.

Heat Shrink Tubing Selection

GM Part Number	Diameter		Description	Color	Length	
	Metric	English			Metric	English
12355003	9.5 mm	0.375 in	Tubing, Shrink 3/8	Black	305 mm	12 in
12355005	12.7 mm	0.5 in	Tubing, Shrink 1/2	Black	305 mm	12 in
12355011	19.1 mm	0.75 in	Tubing, Shrink 3/4	Black	305 mm	12 in
12355008	25.4 mm	1.0 in	Tubing, Shrink 1.00	Black	305 mm	12 in


Wire Size Conversion

Metric Wire Sizes (mm 2)	AWG Sizes
0.13	26
0.21	24
0.32	22
0.52	20
0.83	18
1.31	16
2.09	14
3.31	12
5.27	10
8.37	8
13.3	6
21.2	4
33.6	2
53.5	1/0

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

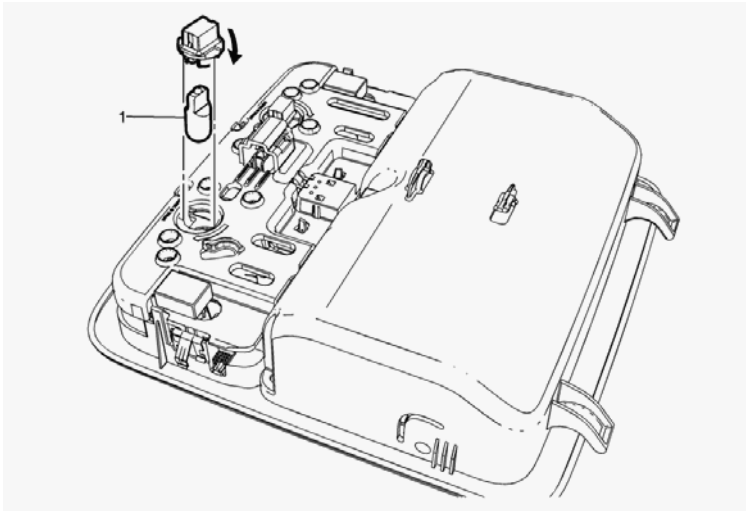

Roof Console Lamp Bulb Replacement

Callout

Component Name

Preliminary Procedure

Remove the roof console. Refer to Roof Console Replacement.

Roof Console Lamp Bulb


1

Procedure

Twist bulb socket and gently pull on bulb to remove.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

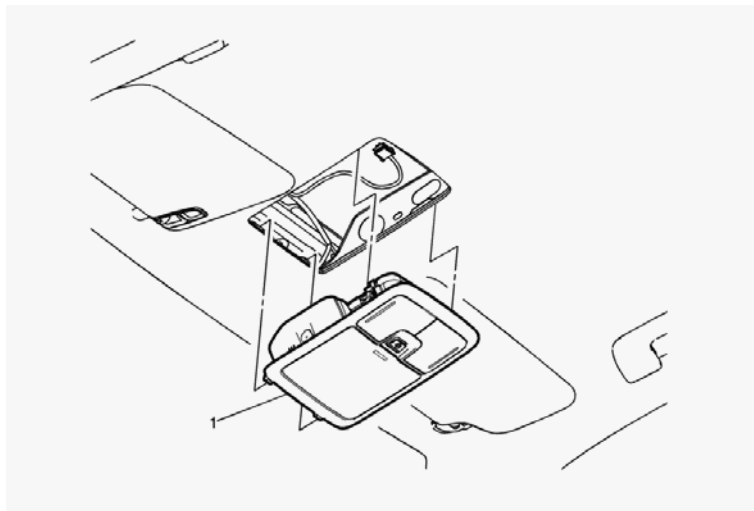

Roof Console Replacement

Callout

Component Name

Roof Console Assembly

Caution: Do not exert downward force at the forward or rearward edge of the roof console assembly as irreversible damage will occur.

Procedures


1

1. Grasp the right and left sides of the roof console assembly where the retainer clips are located and pull downward with equal force on each side in order to release the retainer clips securing the overhead console assembly to the headliner assembly.
2. Disconnect the electrical connectors.
3. If replacing roof console assembly, transfer all necessary components.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

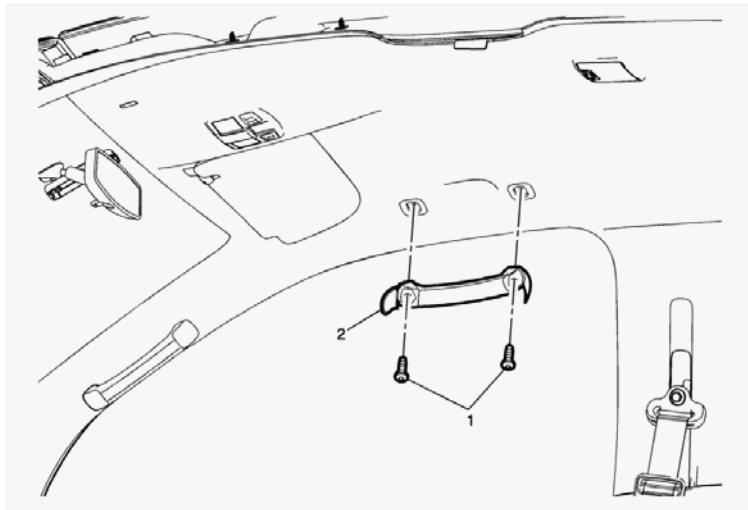

Roof Rail Front Assist Handle Replacement

Callout

Component Name

Roof Rail Front Assist Handle Fastener (Qty: 2)

Caution: Refer to Fastener Caution.

Procedure

Use appropriate trim tool to open integral roof rail front assist handle cover to access fastener.

1


2

Roof Rail Front Assist Handle Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

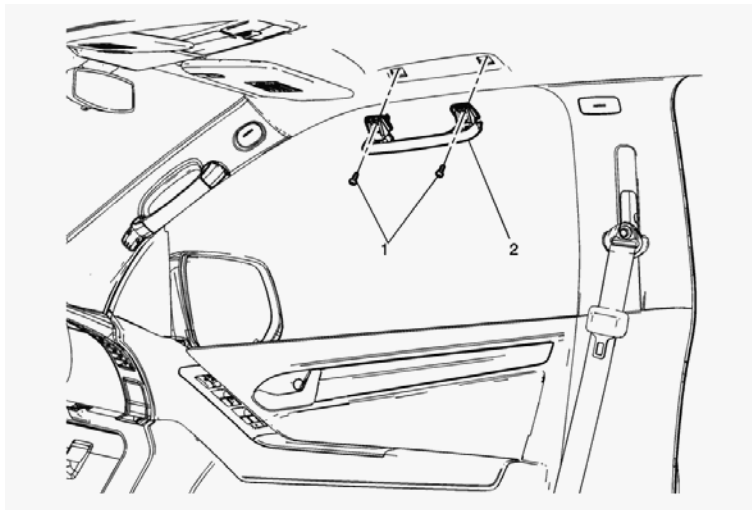

Roof Rail Front Assist Handle Replacement

Callout

Component Name

Roof Rail Front Assist Handle Fastener (Qty: 2)

Caution: Refer to Fastener Caution.

Procedure

1

1. Fold the assist handle downward and hold.
2. Use a small flat-bladed tool to open integral roof rail front assist handle cover to access fastener.


2

Roof Rail Front Assist Handle Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

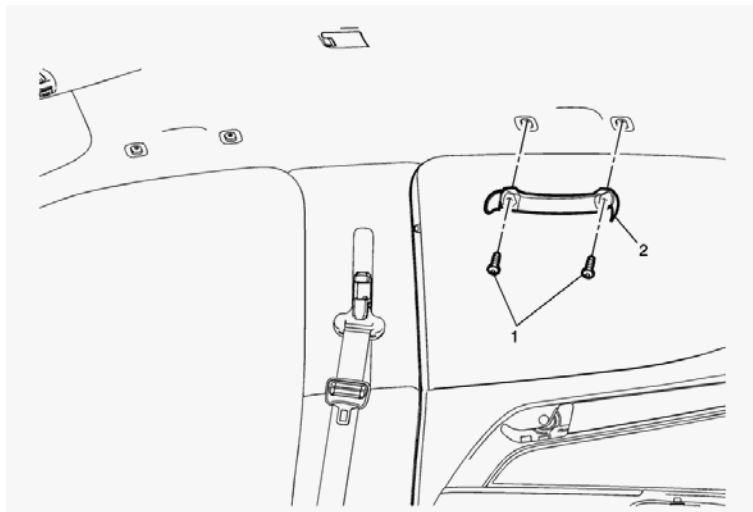

Roof Rail Rear Assist Handle Replacement

Callout

Component Name

1

Roof Rail Rear Assist Handle Fastener (Qty: 2)

Caution: Refer to Fastener Caution.

2

Roof Rail Front Assist Handle Assembly


Procedure

Use a small flat-bladed tool to open the assist handle covers to access the fasteners.

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

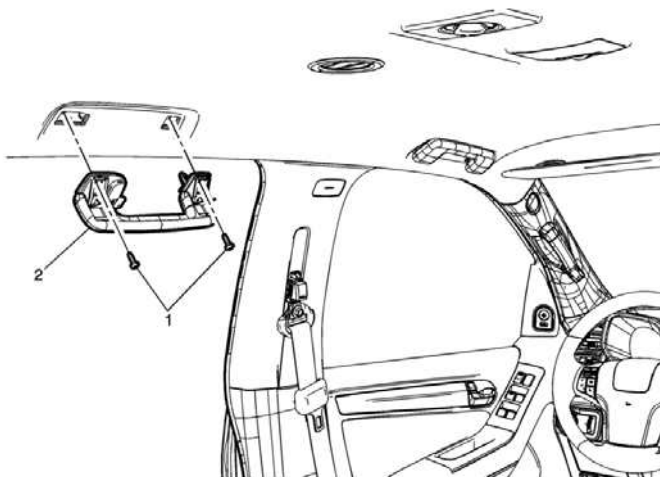

Roof Rail Rear Assist Handle Replacement

Callout

Component Name

Roof Rail Rear Assist Handle Fastener (Qty: 2)

Caution: Refer to Fastener Caution.

Procedure

1

1. Fold the assist handle downward and hold.
2. Use a small flat-bladed tool to open integral roof rail front assist handle cover to access fastener.

2

Roof Rail Front Assist Handle Assembly

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

Warning: When carrying an undeployed inflator module:

- Do not carry the inflator module by the wires or connector.
- Make sure the air bag opening points away from you.

When storing an undeployed inflator module:

- Make sure the air bag opening points away from the surface on which the inflator module rests.
- Provide free space for the air bag to expand in case of an accidental deployment.
- When storing a steering column, do not rest the column with the air bag opening facing down and the column vertical. Lay the column on its side.


Failure to observe these guidelines may result in personal injury.

2013 Chevrolet Colorado


Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

Removal Procedure

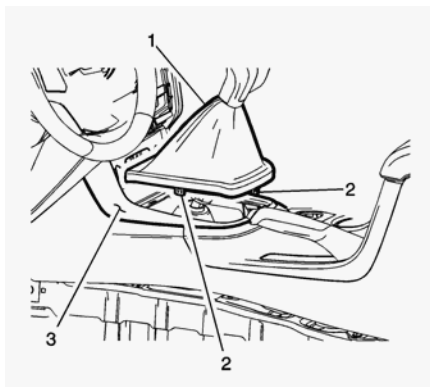


1. Using a flat bladed trim tool, carefully release the four retaining tabs on each side of the boot (1) in order to disengage the boot retainers from the floor console (3).
2. Pull the boot upward to access the control lever set screw.

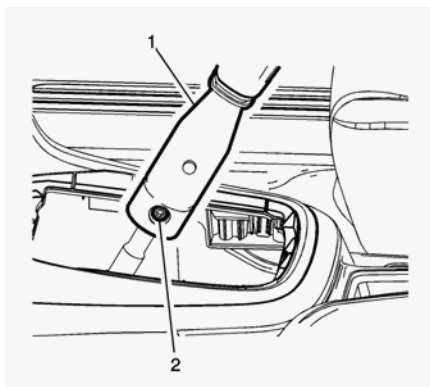

3. Remove the set screw (2) from the shift lever (1).
4. Remove the shift lever assembly from the transmission control lever.
5. Remove the shift lever boot from the control lever.

Installation Procedure

1. Install the shift lever boot to the control lever.

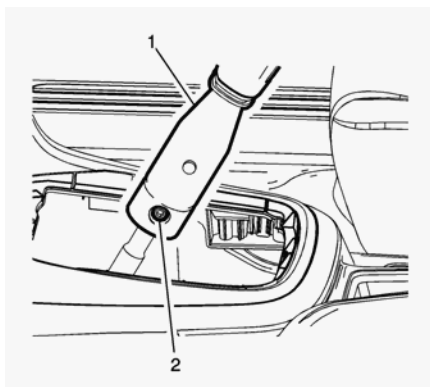


2. Install the control lever and boot assembly to the transmission control lever, aligning the set screw (2) threaded hole with the flat on the control lever.

3. Apply threadlock to the shift lever set screw threads. Refer to Adhesives, Fluids, Lubricants, and Sealers.

Caution: Refer to Fastener Caution.

4. Install the shift lever set screw and tighten to **25 Y (18 lb ft)**.

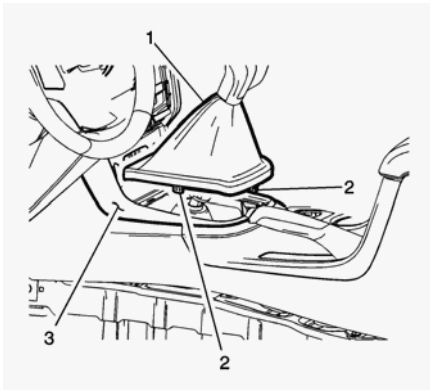


5. Position the boot tabs (2) flat on the console opening.
6. Push downward on all four sides of the boot (1) in order to engage the boot retainers (2) with the floor console (3).

2013 Chevrolet Colorado


Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

Removal Procedure

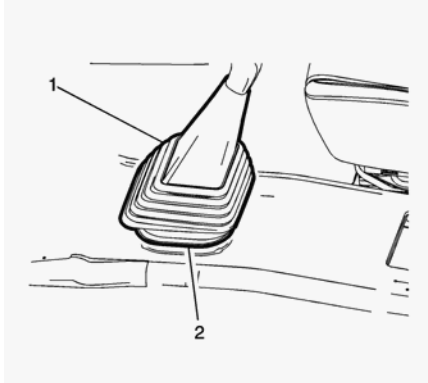


1. Carefully pull the shift boot (1) sideways, then upward to release the boot from the floor panel retaining flange (2).
2. Pull the boot upward to access the control lever set screw.

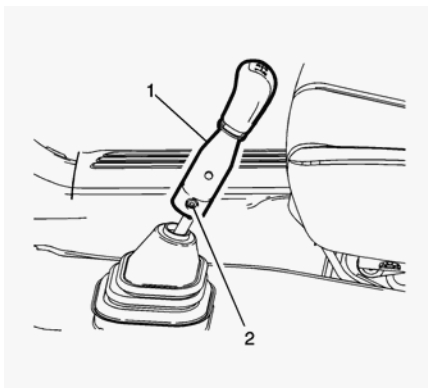

3. Remove the set screw (2) from the shift lever (1).
4. Remove the shift lever assembly from the transmission control lever.
5. If necessary, remove the shift lever boot from the control lever.

Installation Procedure

1. If removed, install the shift lever boot to the control lever.

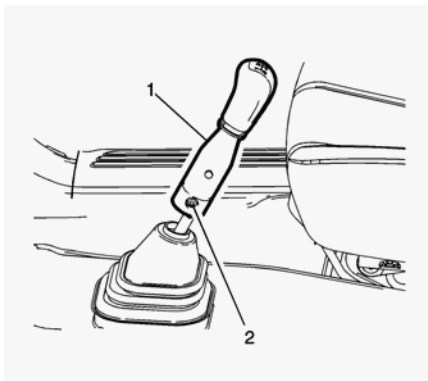

2. Install the control lever and boot assembly to the transmission control lever, aligning the set screw (2) threaded hole with the flat on the control lever.
3. Apply threadlock to the shift lever set screw threads. Refer to Adhesives, Fluids, Lubricants, and Sealers.

Caution: Refer to Fastener Caution.

4. Install the shift lever set screw and tighten to **25 Y (18 lb ft)**.




5. Carefully pull the shift boot (1) sideways, then downward to secure the boot to the floor panel retaining flange (2).

2013 Chevrolet Colorado


Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

Removal Procedure

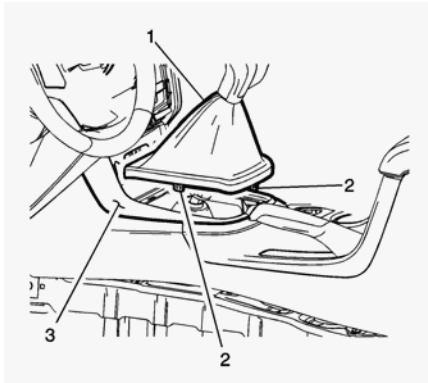


1. Using a flat bladed trim tool, carefully release the four retaining tabs on each side of the boot (1) in order to disengage the boot retainers from the floor console (3).
2. Pull the boot upward to access the control lever set screw.

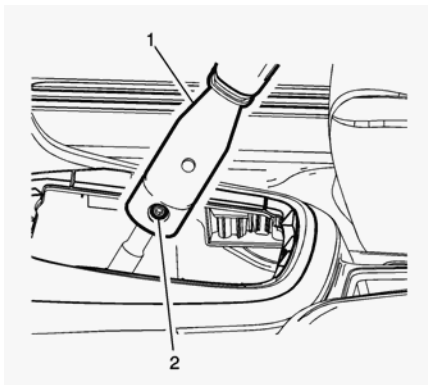

3. Remove the set screw (2) from the shift lever (1).
4. Remove the shift lever assembly from the transmission control lever.
5. If necessary, remove the shift lever boot from the control lever.

Installation Procedure

1. If removed, install the shift lever boot to the control lever.

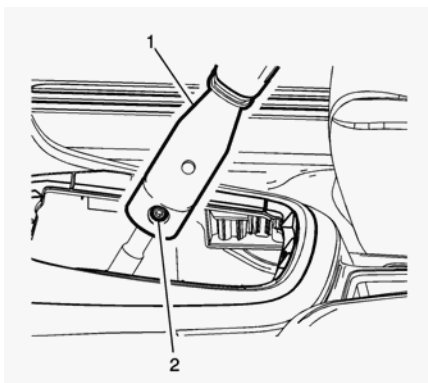


2. Install the control lever and boot assembly to the transmission control lever, aligning the set screw (2) threaded hole with the flat on the control lever.

3. Apply threadlock to the shift lever set screw threads. Refer to Adhesives, Fluids, Lubricants, and Sealers.

Caution: Refer to Fastener Caution.

4. Install the shift lever set screw and tighten to **25 Y (18 lb ft)**.

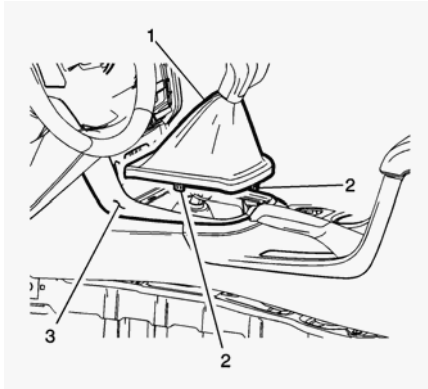


5. Position the boot tabs (2) flat on the console opening.
6. Push downward on all four sides of the boot (1) in order to engage the boot retainers (2) with the floor console (3).

2013 Chevrolet Colorado


Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

Removal Procedure

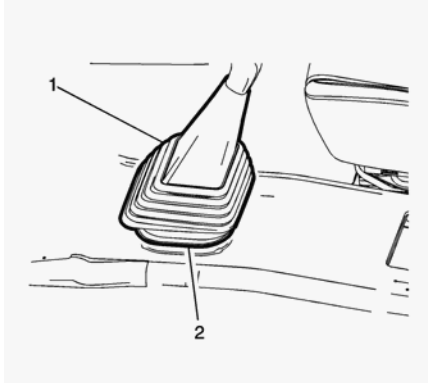


1. Carefully pull the shift boot (1) sideways, then upward to release the boot from the floor panel retaining flange (2).
2. Pull the boot upward to access the control lever set screw.

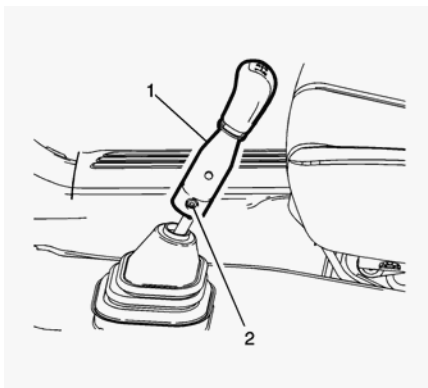

3. Remove the set screw (2) from the shift lever (1).
4. Remove the shift lever assembly from the transmission control lever.
5. If necessary, remove the shift lever boot from the control lever.

Installation Procedure


1. If removed, install the shift lever boot to the control lever.

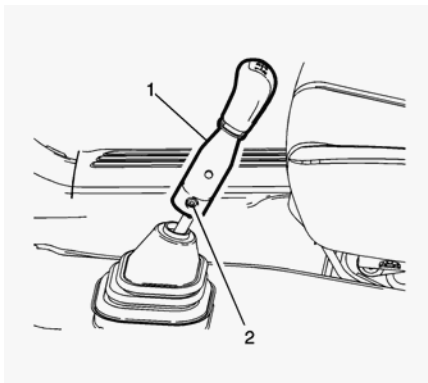

2. Install the control lever and boot assembly to the transmission control lever, aligning the set screw (2) threaded hole with the flat on the control lever.
3. Apply threadlock to the shift lever set screw threads. Refer to Adhesives, Fluids, Lubricants, and Sealers.

Caution: Refer to Fastener Caution.

4. Install the shift lever set screw and tighten to **25 Y (18 lb ft)**.

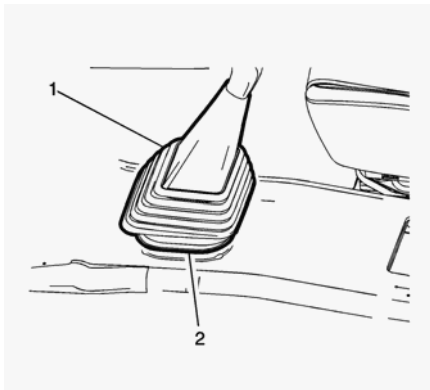


5. Carefully pull the shift boot (1) sideways, then downward to secure the boot to the floor panel retaining flange (2).

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:

Fuel Delivery: | Fuel:

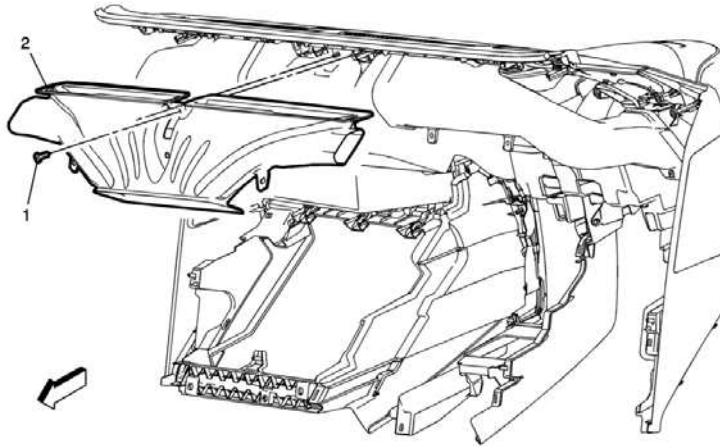

Windshield Defroster Nozzle Duct Replacement

Callout Preliminary Procedure

Component Name

1. Remove the instrument panel assembly. Refer to Instrument Panel Assembly Replacement.
2. Remove left side window defroster. Refer to Side Window Defogger Outlet Duct Replacement - Left Side
3. Remove right side window defroster. Refer to. Side Window Defogger Outlet Duct Replacement - Right Side


1 Windshield Defroster Nozzle Duct Fastener

Caution: Refer to Fastener Caution.

2 Windshield Defroster Nozzle Duct

2013 Chevrolet Colorado

Submodel: | Engine Type: | Liters:
Fuel Delivery: | Fuel:

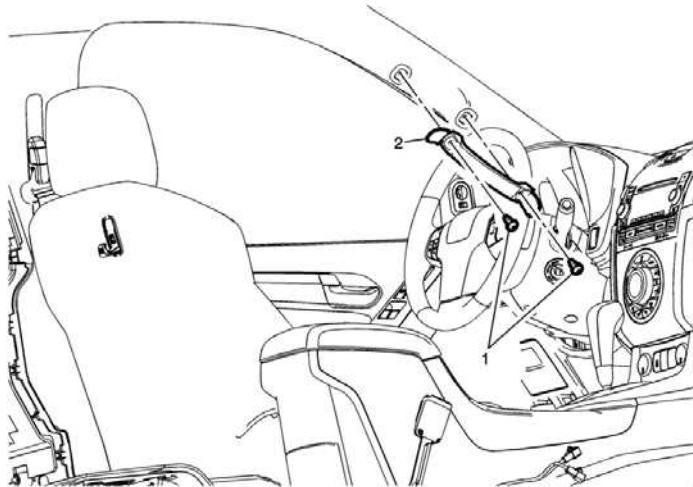

Windshield Pillar Assist Handle Replacement

Callout

Component Name

Windshield Pillar Assist Handle Fastener (Qty: 2)

Caution: Refer to Fastener Caution.

1

Tighten

6 Y (53 lb in)

Windshield Pillar Assist Handle Assembly

2

Procedure

Use appropriate trim tool to open integral windshield pillar assist handle cover to access fastener.