



Illustrated Index

Left Side Cover/Transmission

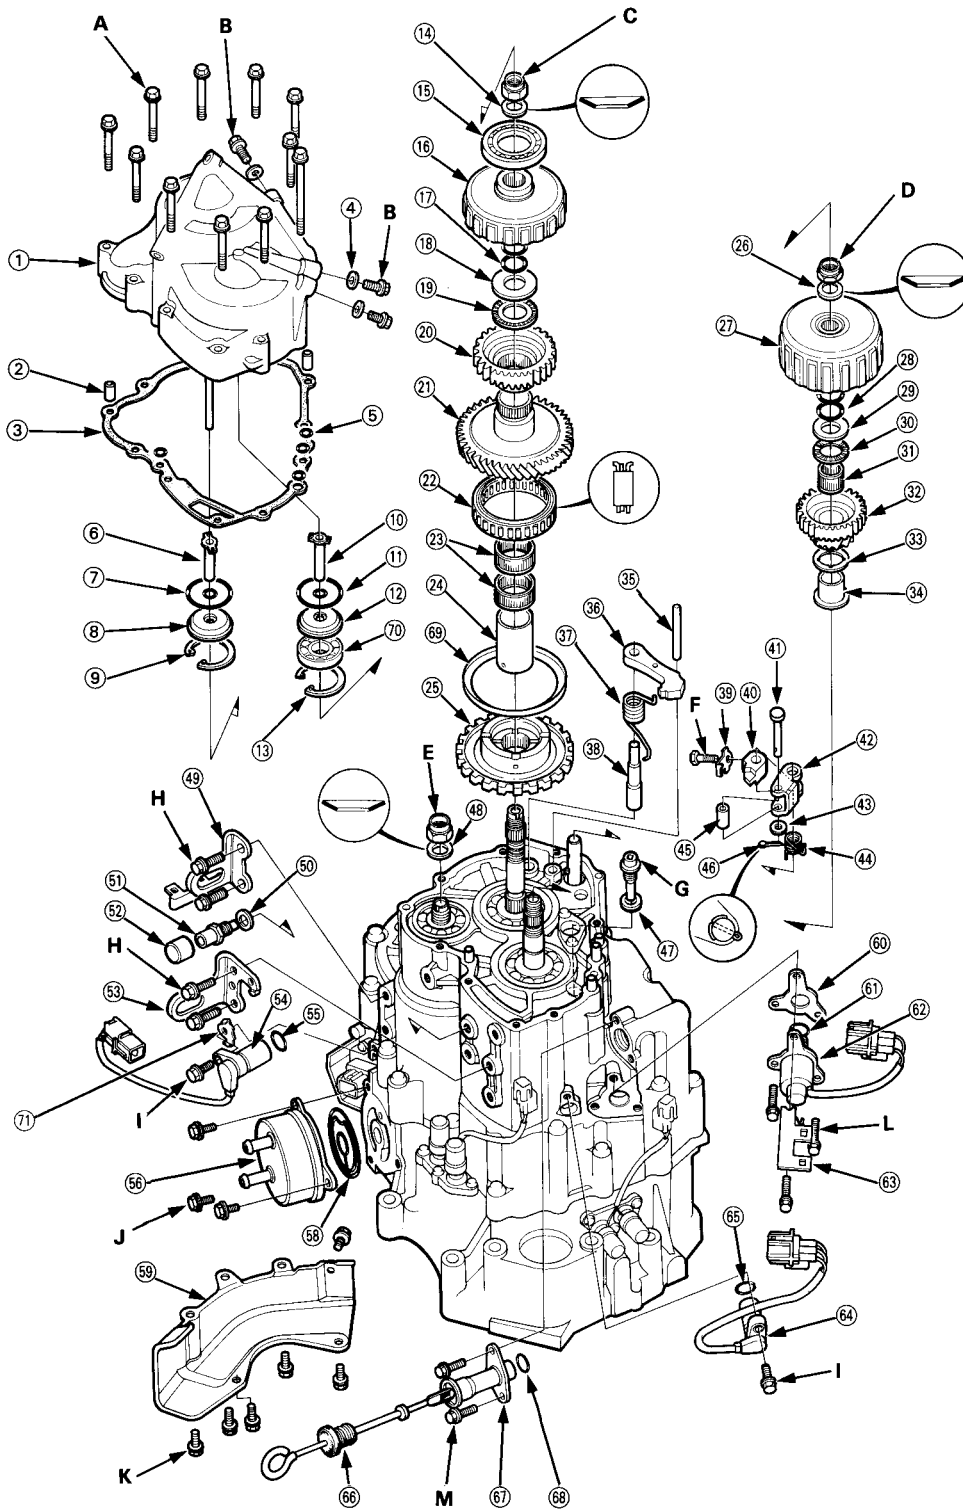



①	LEFT SIDE COVER	③⑥	PARKING BRAKE PAWL
②	DOWEL PIN	③⑦	PARKING BRAKE PAWL SPRING
③	GASKET Replace.	③⑧	PARKING BRAKE PAWL SHAFT
④	SEALING WASHER Replace.	③⑨	LOCK WASHER Replace.
⑤	O-RING Replace.	④①	PARKING BRAKE STOPPER Selective part
⑥	1ST-HOLD CLUTCH FEED PIPE	④②	ROLLER PIN
⑦	O-RING Replace.	④③	PARKING BRAKE LEVER
⑧	FEED PIPE FLANGE	④④	WASHER
⑨	SNAP RING	④⑤	PARKING BRAKE SPRING
⑩	1ST CLUTCH FEED PIPE	④⑥	ROLLER
⑪	O-RING Replace.	④⑦	COTTER PIN Replace.
⑫	FEED PIPE FLANGE	④⑧	SEALING WASHER Replace.
⑬	SNAP RING	④⑨	CONICAL SPRING WASHER Replace.
⑭	CONICAL SPRING WASHER Replace.	⑤①	TRANSMISSION HANGER/CONNECTOR STAY
⑮	BALL BEARING	⑤②	SEALING WASHER Replace.
⑯	1ST-HOLD CLUTCH ASSEMBLY	⑤③	BREATHER JOINT
⑰	O-RING Replace.	⑤④	BREATHER CAP
⑱	THRUST WASHER	⑤⑤	TRANSMISSION HANGER
⑲	THRUST NEEDLE BEARING	⑤⑥	COUNTERSHAFT SPEED SENSOR
⑳	1ST-HOLD CLUTCH HUB	⑤⑦	O-RING Replace.
㉑	COUNTERSHAFT 1ST GEAR	⑤⑧	ATF COOLER
㉒	ONE-WAY CLUTCH	⑤⑨	ATF COOLER FILTER/GASKET Replace.
㉓	NEEDLE BEARINGS	⑥①	SPEED SENSOR COVER
㉔	COUNTERSHAFT 1ST GEAR COLLAR	⑥②	LINEAR SOLENOID SHIM Selective part
	Selective part	⑥③	O-RING Replace.
㉕	PARKING GEAR	⑥④	LINEAR SOLENOID
㉖	CONICAL SPRING WASHER Replace.	⑥⑤	CONNECTOR STAY
㉗	1ST CLUTCH ASSEMBLY	⑥⑥	MAINSHAFT SPEED SENSOR
㉘	O-RING Replace.	⑥⑦	O-RING Replace.
㉙	THRUST WASHER	⑥⑧	ATF DIPSTICK
㉚	THRUST NEEDLE BEARING	⑥⑨	ATF DIPSTICK PIPE
㉛	NEEDLE BEARING	⑦①	O-RING Replace.
㉜	MAINSHAFT 1ST GEAR		RETAINER PLATE
㉝	THRUST WASHER		BALL BEARING
㉞	MAINSHAFT 1ST GEAR COLLAR		COUNTERSHAFT SPEED SENSOR WASHER
㉟	PARKING BRAKE PAWL STOPPER		

TORQUE SPECIFICATION

No.	TORQUE VALUE	BOLT SIZE	REMARKS
A	12 N·m (1.2 kgf·m, 8.7 lbf·ft)	6 x 1.0 mm	
B	18 N·m (1.8 kgf·m, 13 lbf·ft)	8 x 1.25 mm	
C	137 N·m (14.0 kgf·m, 101 lbf·ft)	24 x 1.25 mm	OIL PRESSURE CHECK BOLT COUNTERSHAFT LOCKNUT (Left-hand threads) Replace.
D	137 N·m (14.0 kgf·m, 101 lbf·ft)	23 x 1.25 mm	MAINSHAFT LOCKNUT Replace.
E	137 N·m (14.0 kgf·m, 101 lbf·ft)	24 x 1.25 mm	SECONDARY SHAFT LOCKNUT Replace.
F	14 N·m (1.4 kgf·m, 10 lbf·ft)	6 x 1.0 mm	
G	49 N·m (5.0 kgf·m, 36 lbf·ft)	18 x 1.5 mm	DRAIN PLUG
H	29 N·m (3.0 kgf·m, 22 lbf·ft)	8 x 1.25 mm	
I	12 N·m (1.2 kgf·m, 8.7 lbf·ft)	6 x 1.0 mm	
J	29 N·m (3.0 kgf·m, 22 lbf·ft)	8 x 1.25 mm	ATF COOLER BOLT
K	12 N·m (1.2 kgf·m, 8.7 lbf·ft)	6 x 1.0 mm	
L	9.8 N·m (1.0 kgf·m, 7.2 lbf·ft)	6 x 1.0 mm	LINEAR SOLENOID BOLT