




Exhaust Pipe and Muffler

Replacement

NOTE: Use new gaskets and self-locking nuts when reassembling.

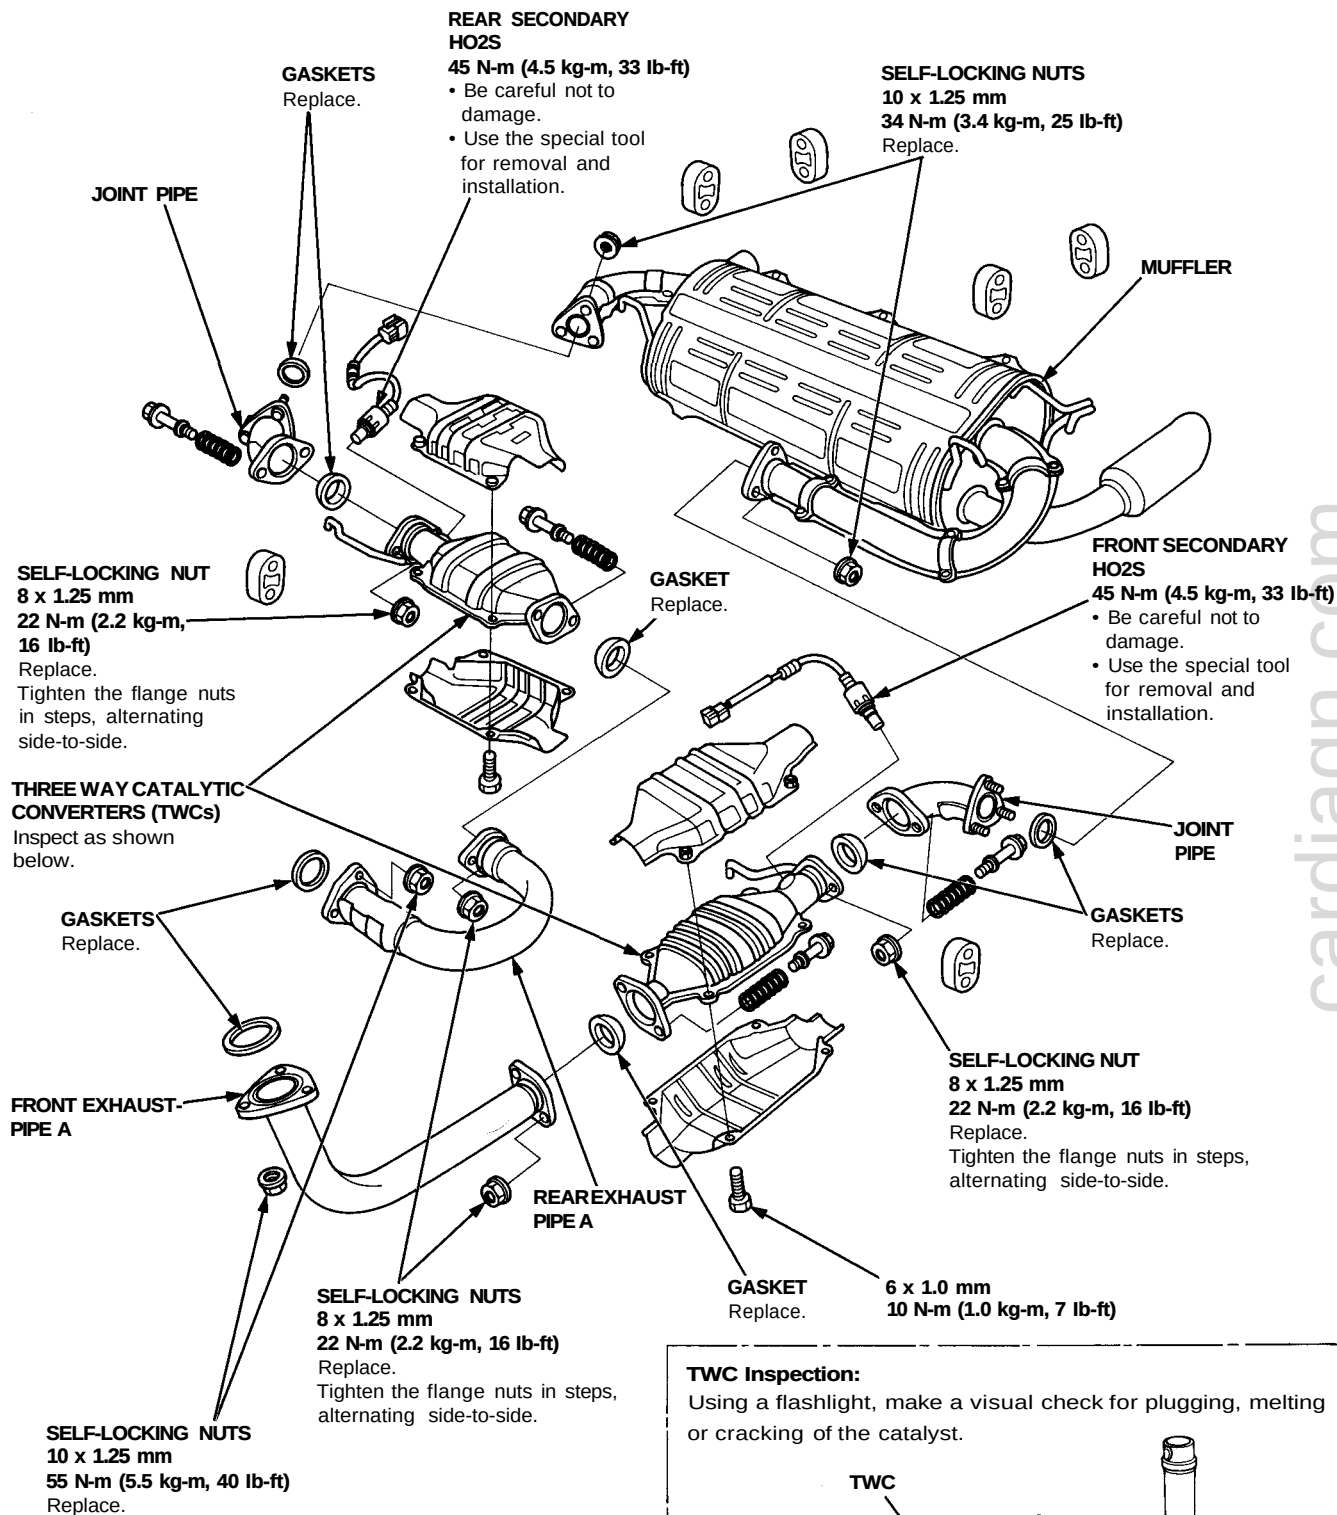

TWC Inspection:

Using a flashlight, make a visual check for plugging, melting or cracking of the catalyst.

