




Illustrated Index


Cylinder Head/Valve Train

Illustrated Index (cont'd)

NOTE:

- Use new O-rings and gaskets when reassembling.
- Replace rubber seals, if damaged or deteriorated.

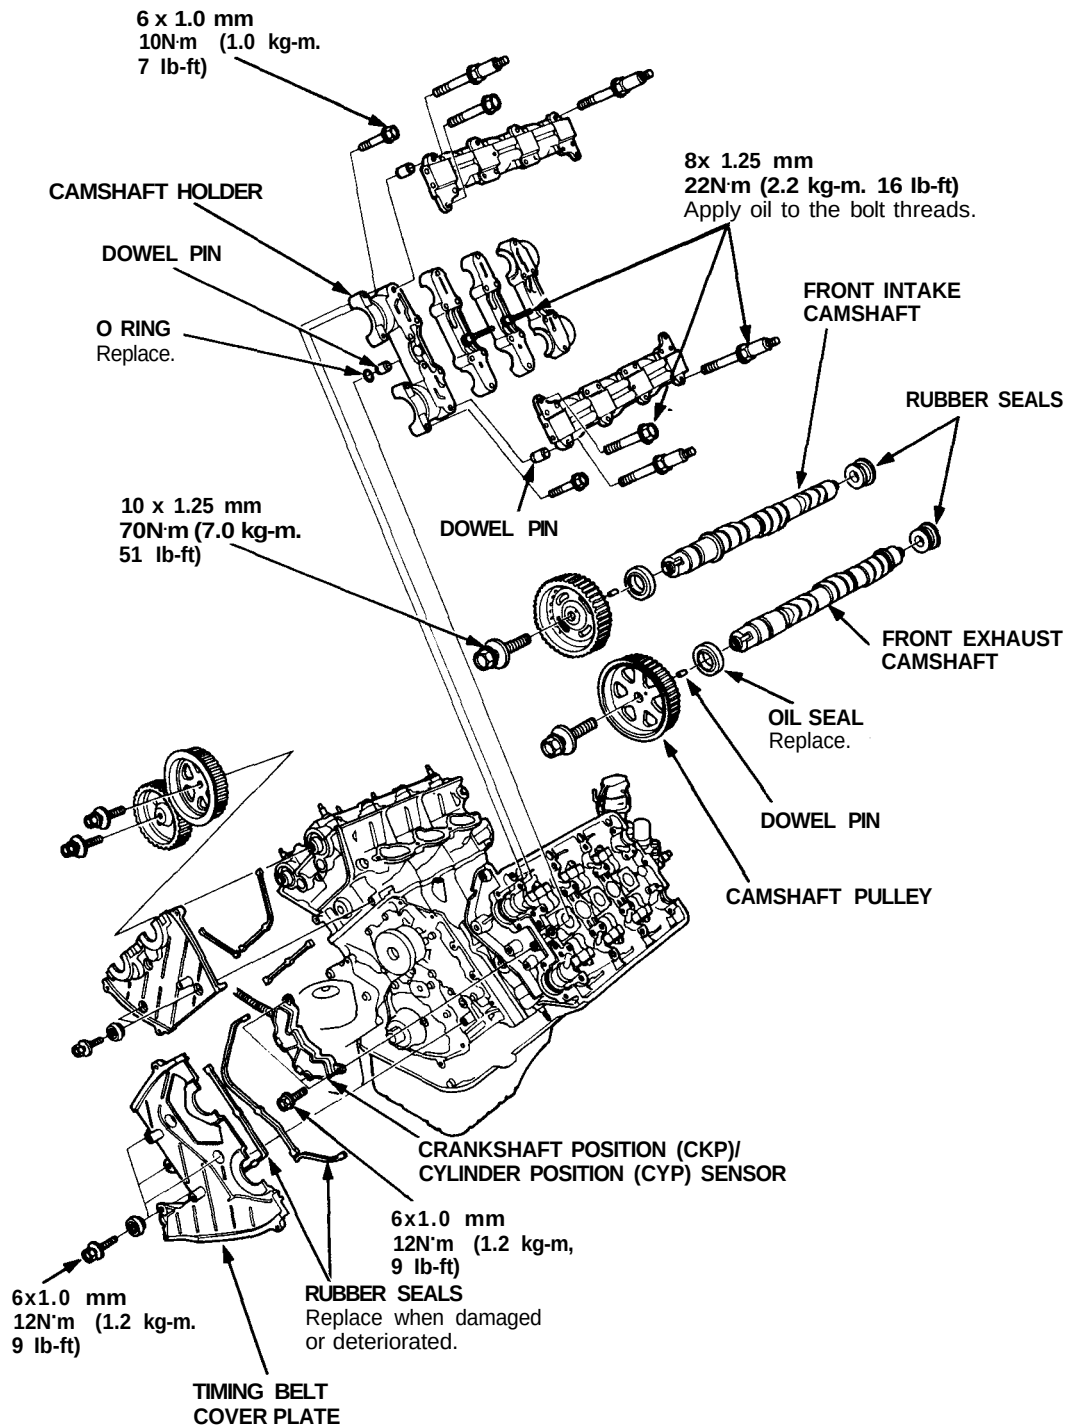

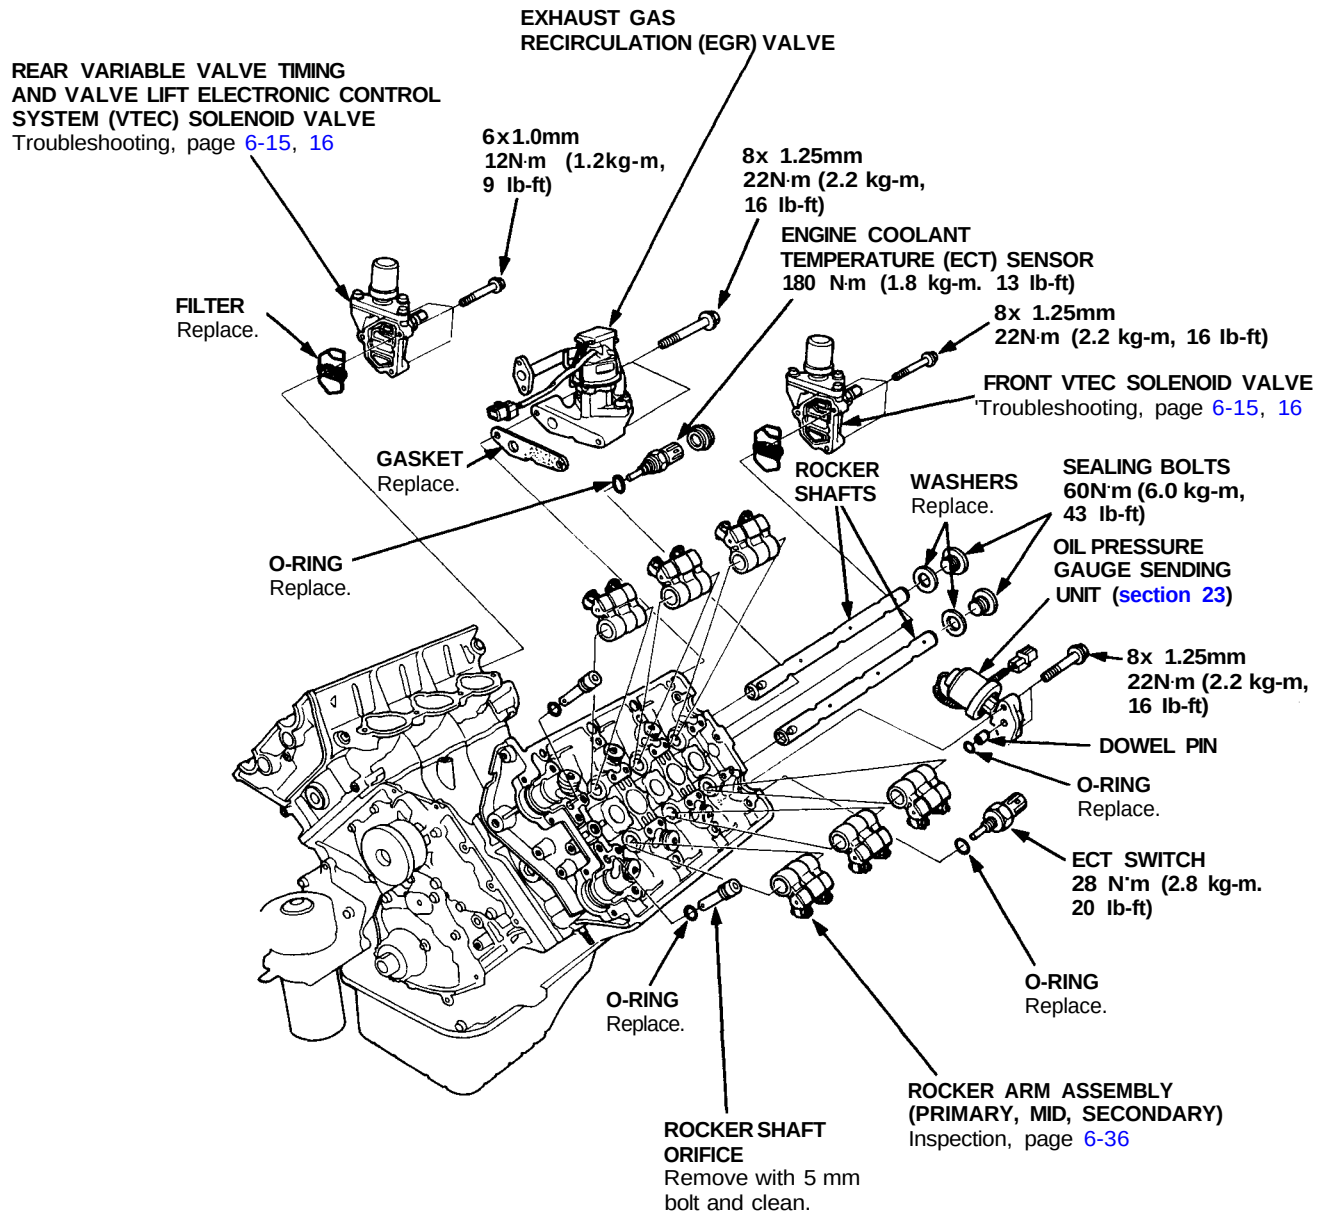

(cont'd)

Cylinder Head/Valve Train

Illustrated Index (cont'd)

CAUTION:

- To avoid damaging the cylinder head, wait until the engine coolant temperature drops below 100°F (38°C) before removing it.
- In handling a metal gasket, care should be taken not to fold it or damage the contact surface of the gasket.

NOTE: Use new O-rings and gaskets when reassembling.



Prior to reassembling, clean all the parts in solvent, dry them, and apply lubricant to any contact parts.

