


Illustrated Index

Left Side Cover



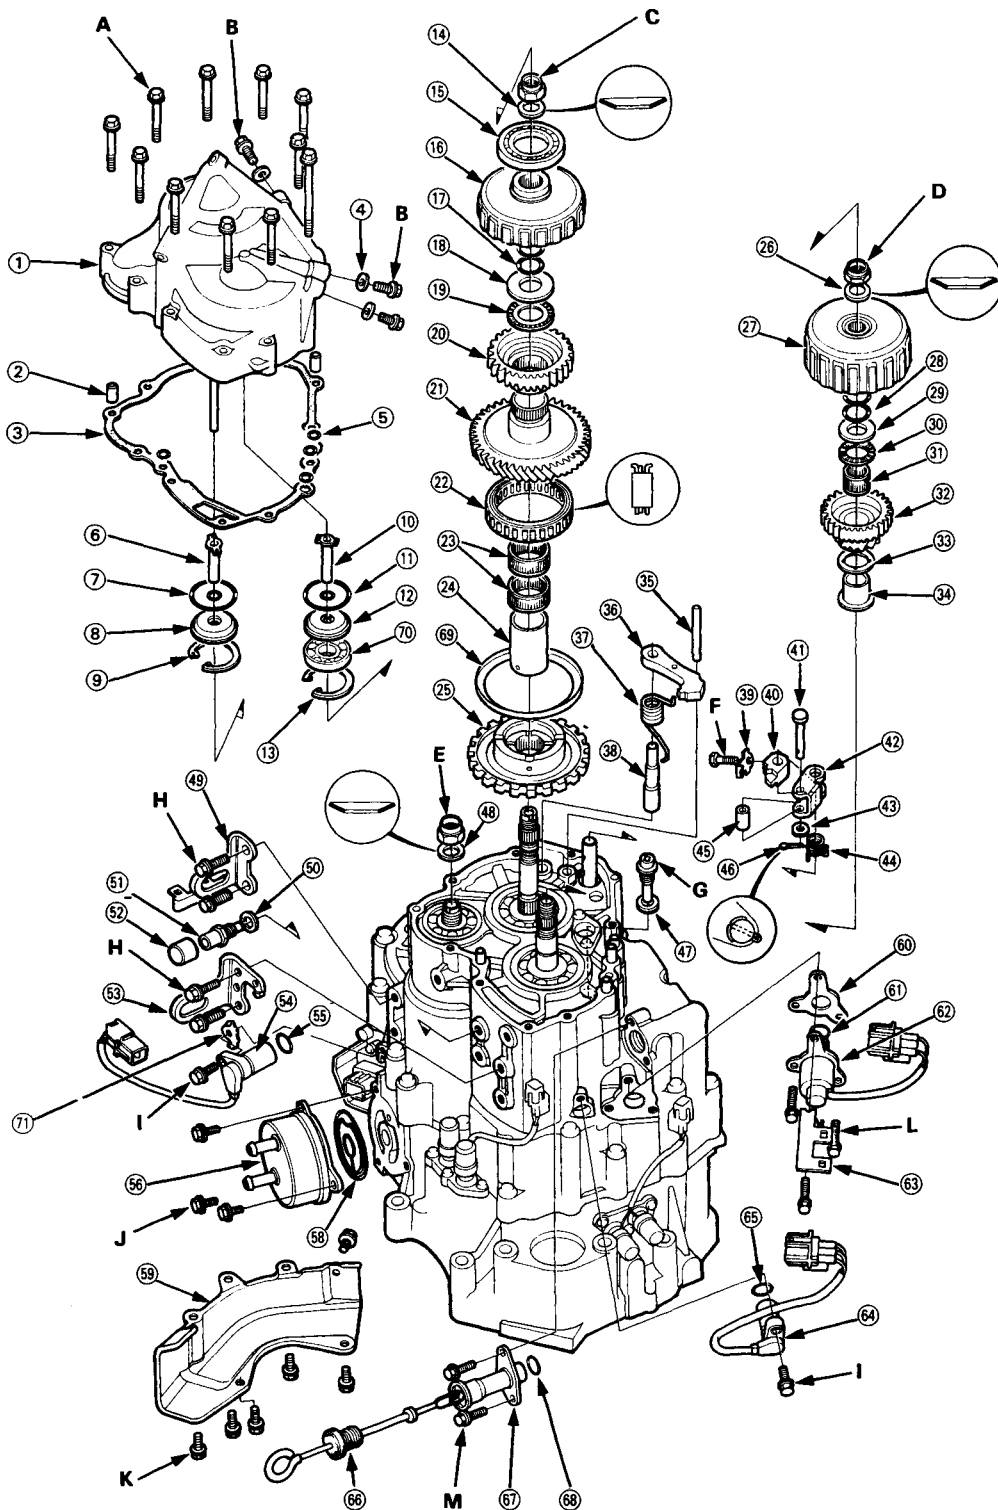

- | | | | |
|---|--------------------------------|----|------------------------------------|
| ① | LEFT SIDE COVER | ③⑥ | PARKING BRAKE PAWL |
| ② | DOWEL PIN | ③⑦ | PARKING BRAKE PAWL SPRING |
| ③ | GASKET Replace. | ③⑧ | PARKING BRAKE PAWL SHAFT |
| ④ | SEALING WASHER Replace. | ③⑨ | LOCK WASHER Replace. |
| ⑤ | O-RING Replace. | ④① | PARKING BRAKE STOPPER |
| ⑥ | 1ST-HOLD CLUTCH FEED PIPE | ④② | ROLLER PIN |
| ⑦ | O-RING Replace. | ④③ | PARKING BRAKE LEVER |
| ⑧ | FEED PIPE FLANGE | ④④ | WASHER |
| ⑨ | SNAP RING | ④⑤ | PARKING BRAKE SPRING |
| ⑩ | 1ST CLUTCH FEED PIPE | ④⑥ | ROLLER |
| ⑪ | O-RING Replace. | ④⑦ | COTTER PIN Replace. |
| ⑫ | FEED PIPE FLANGE | ④⑧ | SEALING WASHER Replace. |
| ⑬ | SNAP RING | ④⑨ | CONICAL SPRING WASHER Replace. |
| ⑭ | CONICAL SPRING WASHER Replace. | ⑤① | TRANSMISSION HANGER/CONNECTOR STAY |
| ⑮ | BALL BEARING | ⑤② | SEALING WASHER Replace. |
| ⑯ | 1ST-HOLD CLUTCH ASSEMBLY | ⑤③ | BREATHER JOINT |
| ⑰ | O-RING Replace. | ⑤④ | BREATHER CAP |
| ⑱ | THRUST WASHER | ⑤⑤ | TRANSMISSION HANGER |
| ⑲ | THRUST NEEDLE BEARING | ⑤⑥ | COUNTERSHAFT SPEED SENSOR |
| ⑳ | 1ST-HOLD CLUTCH HUB | ⑤⑦ | O-RING Replace. |
| ㉑ | COUNTERSHAFT 1ST GEAR | ⑤⑧ | ATF COOLER |
| ㉒ | ONE-WAY CLUTCH | ⑤⑨ | ATF COOLER FILTER/GASKET Replace. |
| ㉓ | NEEDLE BEARINGS | ⑥① | SPEED SENSOR COVER |
| ㉔ | COUNTERSHAFT 1ST GEAR COLLAR | ⑥② | LINEAR SOLENOID SHIM |
| ㉕ | PARKING GEAR | ⑥③ | O-RING Replace. |
| ㉖ | CONICAL SPRING WASHER Replace. | ⑥④ | LINEAR SOLENOID |
| ㉗ | 1ST CLUTCH ASSEMBLY | ⑥⑤ | CONNECTOR STAY |
| ㉘ | O-RING Replace. | ⑥⑥ | MAINSHAFT SPEED SENSOR |
| ㉙ | THRUST WASHER | ⑥⑦ | O-RING Replace. |
| ㉚ | THRUST NEEDLE BEARING | ⑥⑧ | ATF LEVEL GAUGE |
| ㉛ | NEEDLE BEARING | ⑥⑨ | ATF LEVEL GAUGE PIPE |
| ㉜ | MAINSHAFT 1ST GEAR | ⑦① | O-RING Replace. |
| ㉝ | THRUST WASHER | | RETAINER PLATE |
| ㉞ | MAINSHAFT 1ST GEAR COLLAR | | BALL BEARING |
| ㉟ | PARKING BRAKE PAWL STOPPER | | COUNTERSHAFT SPEED SENSOR WASHER |

TORQUE SPECIFICATION

No.	TORQUE VALUE	BOLT SIZE	REMARKS
A	12 N·m (1.2 kg-m, 9 lb-ft)	6 x 1.0 mm	
B	18 N·m (1.8 kg-m, 13 lb-ft)	8 x 1.25 mm	OIL PRESSURE CHECK BOLT
C	140 N·m (14.0 kg-m, 101 lb-ft)	24 x 1.25 mm	COUNTERSHAFT LOCKNUT (Left-hand threads) Replace.
D	140 N·m (14.0 kg-m, 101 lb-ft)	23 x 1.25 mm	MAINSHAFT LOCKNUT Replace.
E	140 N·m (14.0 kg-m, 101 lb-ft)	24 x 1.25 mm	SECONDARY SHAFT LOCKNUT Replace.
F	14 N·m (1.4 kg-m, 10 lb-ft)	6 x 1.0 mm	Special bolt (Replace.)
G	50 N·m (5.0 kg-m, 36 lb-ft)	18 x 1.5 mm	DRAIN PLUG
H	30 N·m (3.0 kg-m, 22 lb-ft)	8 x 1.25 mm	
I	12 N·m (1.2 kg-m, 9 lb-ft)	6 x 1.0 mm	
J	30 N·m (3.0 kg-m, 22 lb-ft)	8 x 1.25 mm	ATF COOLER BOLT
K	12 N·m (1.2 kg-m, 9 lb-ft)	6 x 1.0 mm	
L	10 N·m (1.0 kg-m, 7 lb-ft)	6 x 1.0 mm	LINEAR SOLENOID BOLT
M	12 N·m (1.2 kg-m, 9 lb-ft)	6 x 1.0 mm	