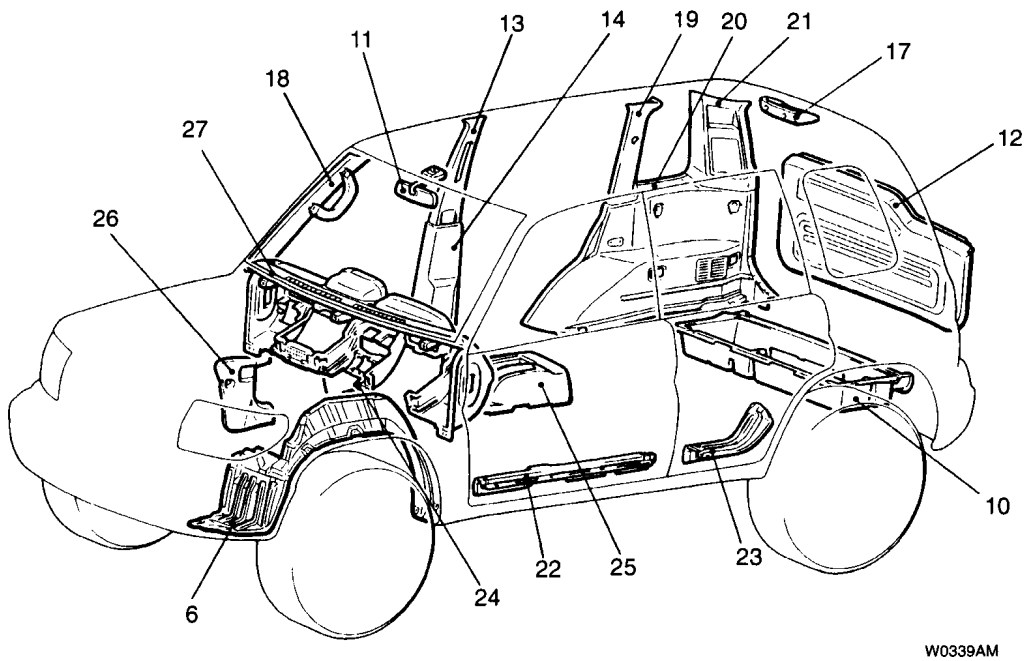
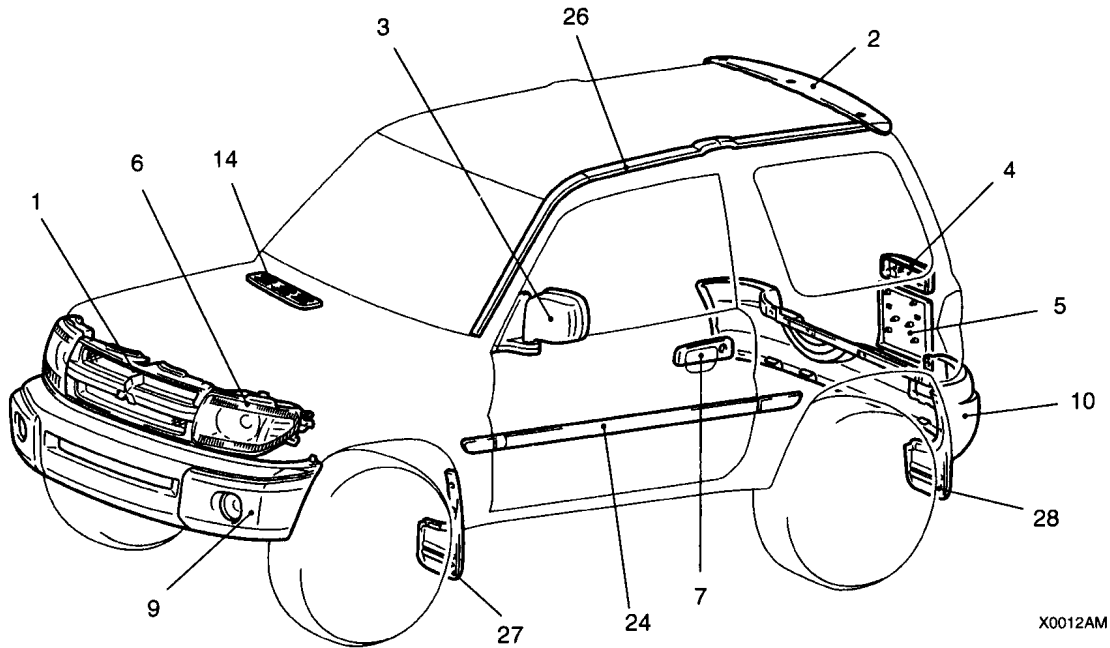

5 SYNTHETIC-RESIN PARTS

LOCATION OF SYNTHETIC-RESIN PARTS . . 5-2

LOCATION OF SYNTHETIC-RESIN PARTS



No.	Part name	Name of resin	Abbreviation	Heat-withstand temp. (°C)
1 2	Radiator grille Rear spoiler	Acrylonitrile butadiene styrene	ABS	80 – 110
3 4 5	Door mirror License lamp garnish License plate garnish	Acrylonitrile styrene acrylate	ASA (AAS)	80 – 100
6	Headlamp	Polycarbonate	PC	130 – 140
7	Door outside handle	Polycarbonate + Polyethylene terephthalate	PC + PET	140 – 150
8	Splash shield	Polyethylene	PE	70 – 90
9 10 11 12 13	Front bumper face Rear bumper face Luggage floor box Inside rear view mirror Back door trim	Polypropylene	PP	80 – 120
14 15	Front deck garnish High mounted stop lamp cover	Talc filled Polypropylene	PP – TD (PPF)	110 – 140
16 17 18 19 20 21 22 23	Front pillar trim Center pillar trim, upper Quarter trim Rear pillar trim Front scuff plate Rear floor console Floor console Cowl side trim	10% talc filled Polypropylene	PP – TD10 (PPF)	110 – 120
24	side protector moulding	15% talc filled Polypropylene	PP – TD15 (PPF)	110 – 120
25	Instrument panel	20% talc filled Polypropylene	PP – TD20 (PPF)	120 – 130
26	Roof moulding	Polyvinyl chloride	PVC	70 – 90
27 28	Front mud guard Rear mud guard	Ethylene vinyl acetate	E/VAC (EVA)	60

NOTES

- (1) The indicated heat-resistance temperature for parts which are composed of two or more types or material is the value for the material with the lowest heat-resistance temperature.
- (2) If the new material symbols designated by the ISO differ from the old symbols, both are given, with the old symbol being enclosed in brackets.
- (3) The material symbols for synthetic-resin parts are embossed on the parts in hidden places.
- (4) A slash (/) in the material symbol indicates that two different materials make 2-layer construction. A plus sign (+) indicates that the two different materials mix each other.