Steering Wheel Control Switch Assembly Replacement

Removal Procedure

Warning: Refer to Battery Disconnect Warning in the Preface section.

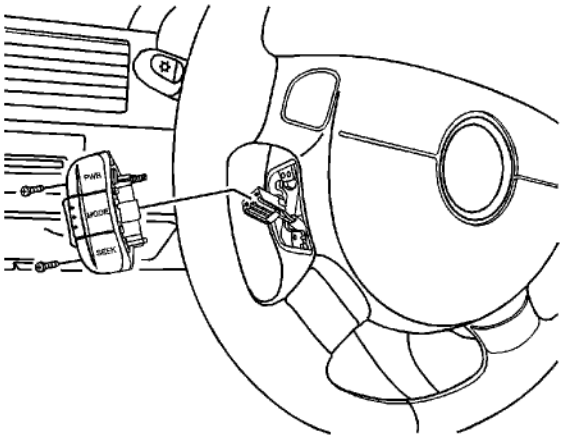

1. Disconnect the negative battery cable.
2. Remove the screws and the audio remote controller.

Installation Procedure

© 2010 General Motors Corporation. All rights reserved.

cardiagn.com

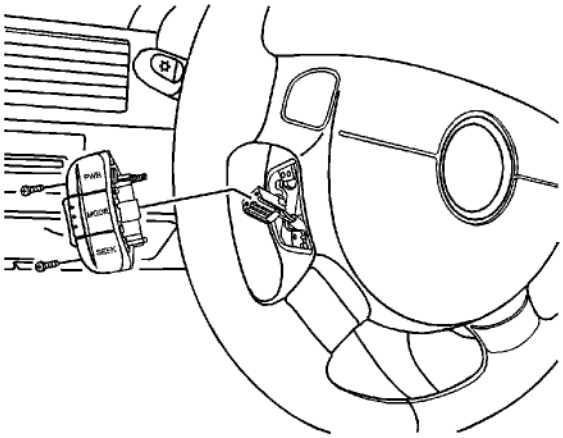

1. Install the audio remote controller with the screws.
2. Connect the negative battery cable.

cardiagn.com