

2007-2008 ACCESSORIES AND EQUIPMENT

Horns - TL

COMPONENT LOCATION INDEX

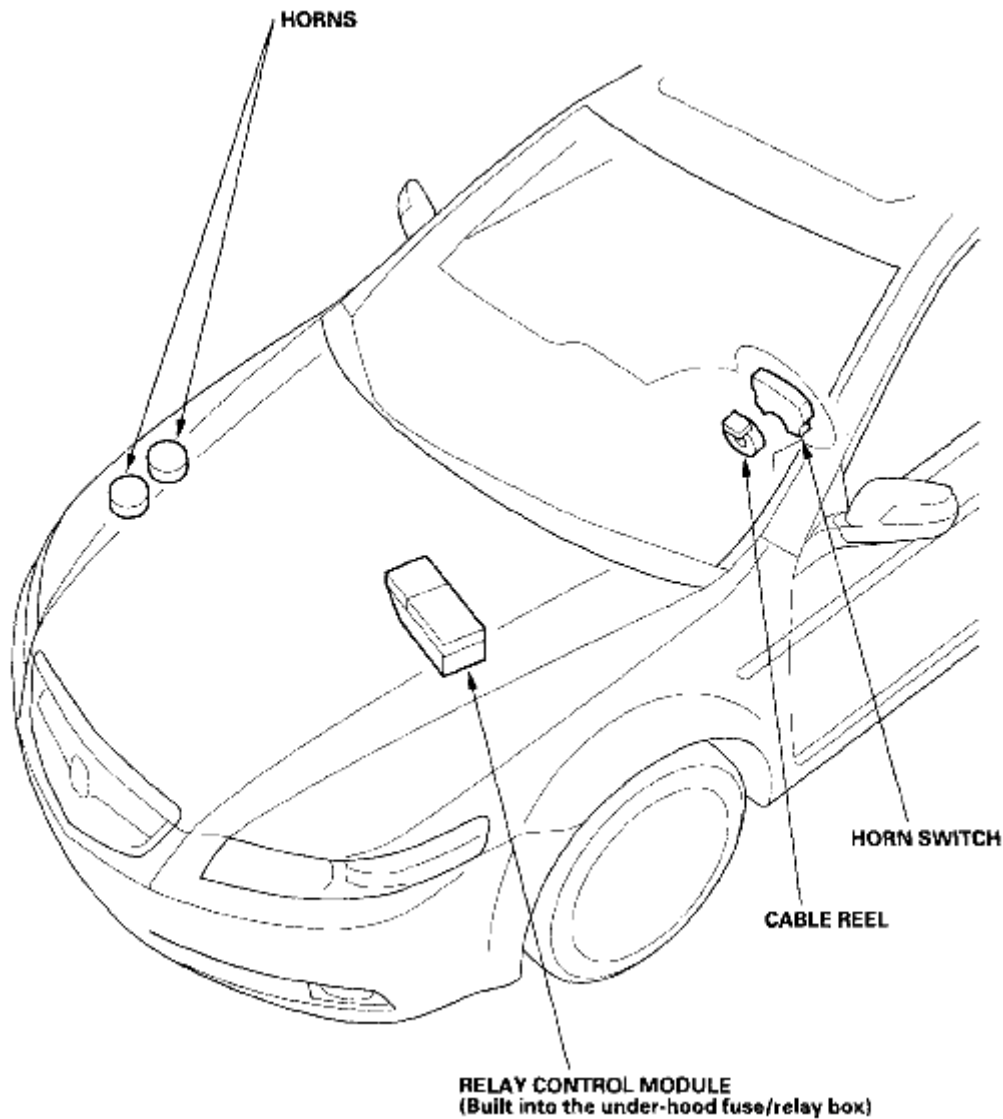


Fig. 1: Identifying Horns Components Location
Courtesy of AMERICAN HONDA MOTOR CO., INC.

CIRCUIT DIAGRAM



Courtesy of AMERICAN HONDA MOTOR CO., INC.

1. Remove the front bumper (see **FRONT BUMPER REMOVAL/INSTALLATION**).
2. Disconnect the 1P connector (A) from each horn (B).

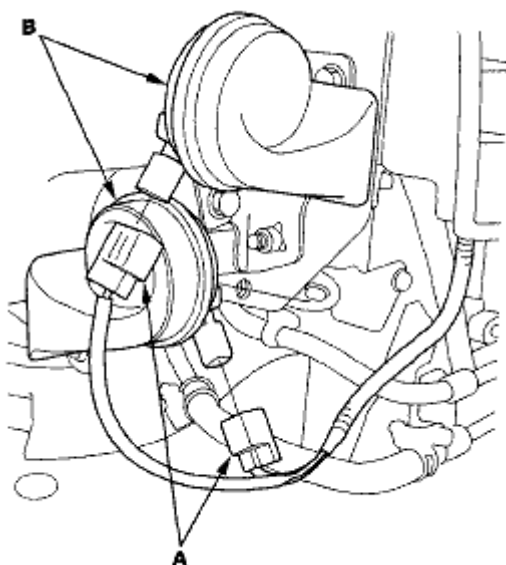


Fig. 3: Identifying Horn 1P Connector

Courtesy of AMERICAN HONDA MOTOR CO., INC.

3. Remove the mounting bolts and horn.
4. Test the horn by connecting battery power to the terminal (A) and grounding the bracket (B). The horn should sound.

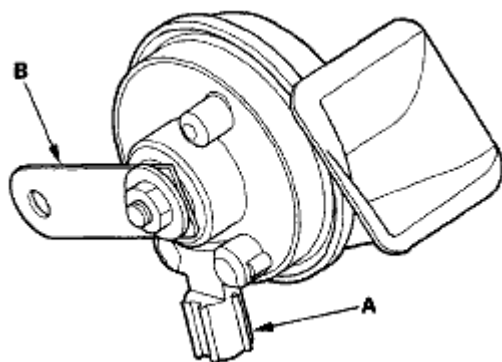


Fig. 4: Identifying Horn Battery Power Connecting Terminal And Grounding Bracket

Courtesy of AMERICAN HONDA MOTOR CO., INC.

5. If it fails to sound, replace it.

HORN SWITCH TEST

1. Remove the steering column covers (see **STEERING COLUMN REMOVAL AND INSTALLATION**).
2. Disconnect the dashboard wire harness 20P connector (A) from the cable reel.

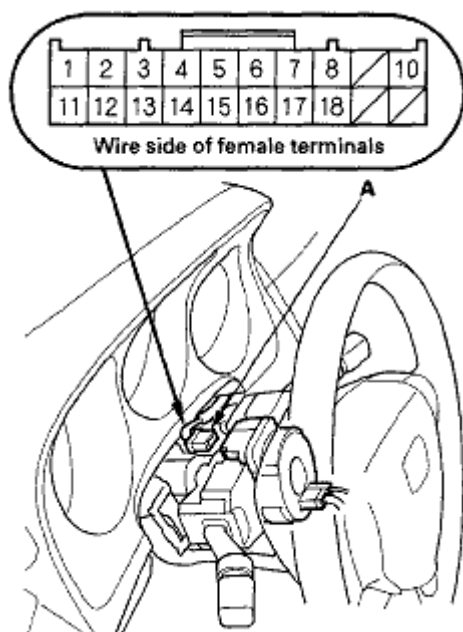


Fig. 5: Identifying Dashboard Wire Harness 20P Connector
Courtesy of AMERICAN HONDA MOTOR CO., INC.

3. Using a jumper wire, connect the No. 4 terminal of the dashboard wire harness 20P connector to body ground.
 - If the horns sound, go to step 4.
 - If the horns don't sound, check these items:
 - No. 13 (20 A) fuse in the under-hood fuse/relay box.
 - Relay control module in the under-hood fuse/relay box.
 - Horns (see **HORN TEST/REPLACEMENT**).
 - An open in the wire.
4. Reconnect the dashboard wire harness 20P connector (A) to the cable reel.

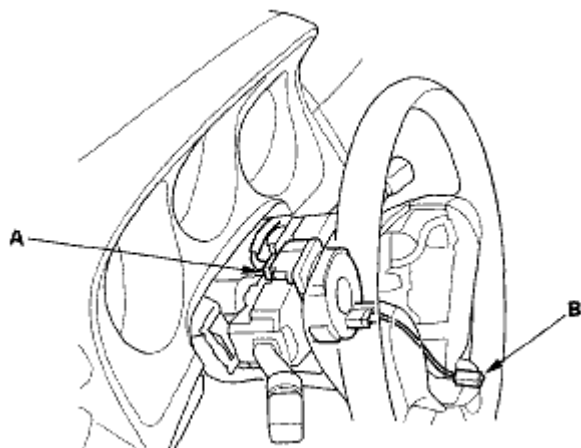


Fig. 6: Identifying Dashboard Wire Harness 20P Connector
Courtesy of AMERICAN HONDA MOTOR CO., INC.

5. Remove the driver's airbag assembly (see **DRIVER'S AIRBAG REPLACEMENT**), and disconnect

the horn switch IP positive terminal from the driver's airbag assembly.

6. Using a jumper wire, connect the cable reel side 1P connector (B) to body ground.
 - If the horns sound, replace the driver's airbag assembly.
 - If the horns do not sound, check these items:
 - Cable reel.
 - An open in the wire (cable reel subharness).