

2013 ACCESSORIES & EQUIPMENT

Exterior Trim - Malibu

REPAIR INSTRUCTIONS

FRONT LICENSE PLATE BRACKET REPLACEMENT

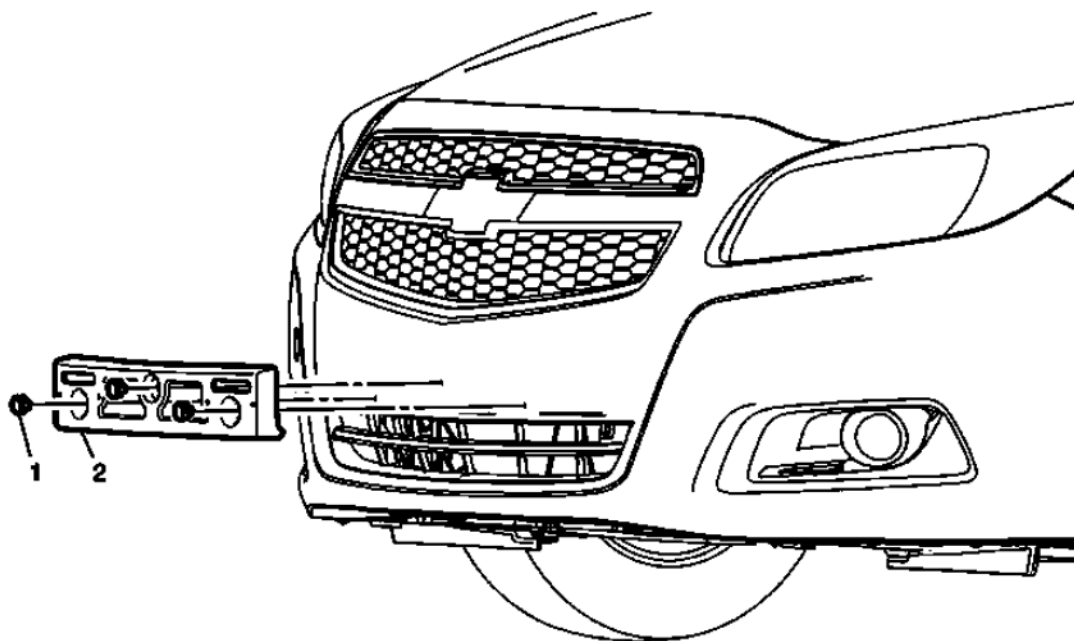


Fig. 1: Front License Plate Bracket
Courtesy of GENERAL MOTORS COMPANY

Front License Plate Bracket Replacement

Callout	Component Name
Preliminary Procedure Remove the front license plate if equipped.	
1	Front License Plate Bracket Rivet (Qty: 3) WARNING: Refer to <u>Eye Protection Warning</u> . CAUTION: Refer to <u>Fastener Caution</u> .

	Procedure Drill out the rivets.
2	Front License Plate Bracket

FRONT END FASCIA EMBLEM REPLACEMENT

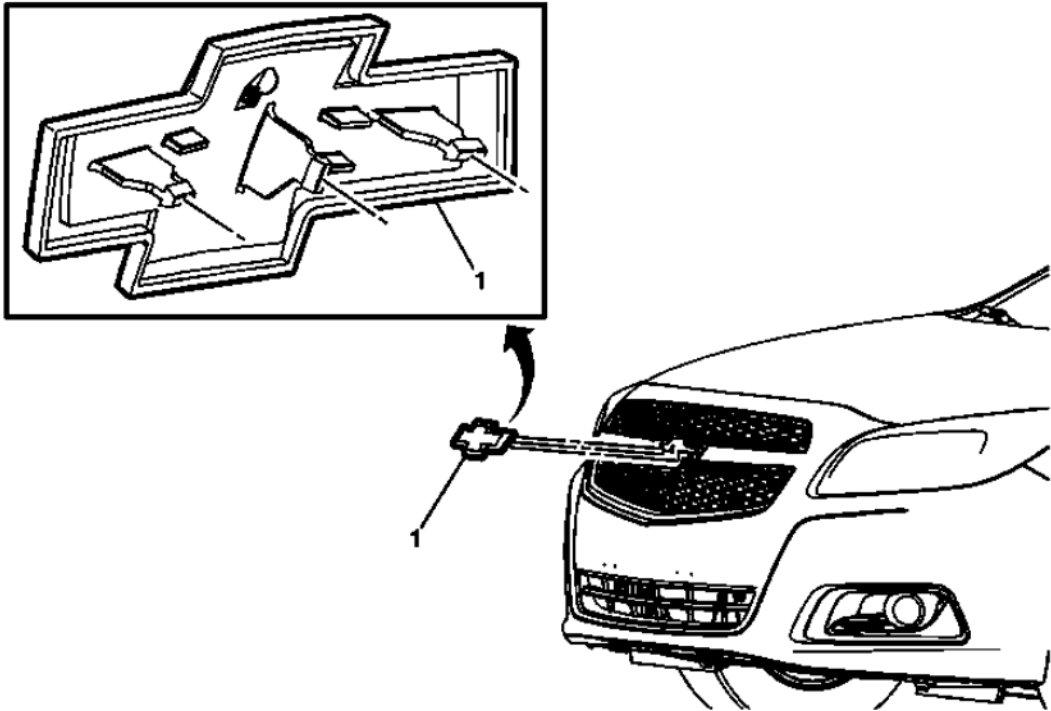


Fig. 2: Front End Fascia Emblem
Courtesy of GENERAL MOTORS COMPANY

Front End Fascia Emblem Replacement

Callout	Component Name
1	Front End Fascia Emblem WARNING: Refer to <u>Eye Protection Warning</u> . Procedure 1. Apply two layers of masking tape at each end of the front fascia emblem. 2. Using a small flat-bladed tool, release the three locking retainers on the front fascia emblem.

REAR COMPARTMENT LID EMBLEM/NAMEPLATE REPLACEMENT

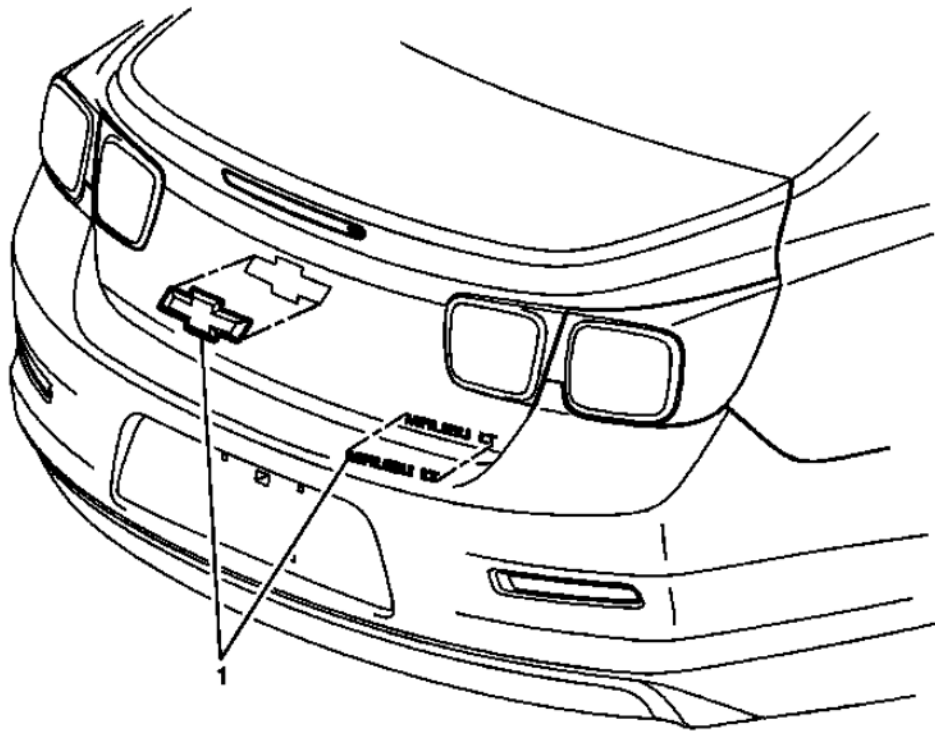


Fig. 3: Rear Compartment Lid Emblem/Nameplate
 Courtesy of GENERAL MOTORS COMPANY

Rear Compartment Lid Emblem/Nameplate Replacement

Callout	Component Name
1	Rear Compartment Lid Emblem/Nameplate CAUTION: Refer to <u>Exterior Trim Emblem Removal Caution</u> . Procedure 1. The part and surface should be 21°C (70°F) prior to installation. The vehicle should remain 21°C (70°F) for 1 hour after assembly to allow adhesive to develop sufficient bond strength. 2. Measure and mark positions of old emblems before removing. 3. Apply two layers of masking tape at each end of the emblem/nameplate. 4. Use a heat gun or equivalent heat the emblem/nameplate to soften the adhesive. Remove the old emblem/nameplate; a flat-bladed plastic tool can assist in the removal process. Clean all adhesive from the rear compartment lid panel and wipe the surface dry with a clean lint-free towel prior to installing the new emblem/nameplate. 5. Remove the protective liners from the adhesive tape, being careful not to touch tape with hands and not allowing the tape to come in contact with

- dirt or any foreign matter prior to installation of the emblem/nameplate.
6. Close the rear compartment lid prior to installation of the emblem/nameplate.
7. Using the palm of the hand, and a dry clean lint-free towel to ensure proper adhesion is made to the rear compartment lid emblem/nameplate.

FRONT CENTER GRILLE REPLACEMENT

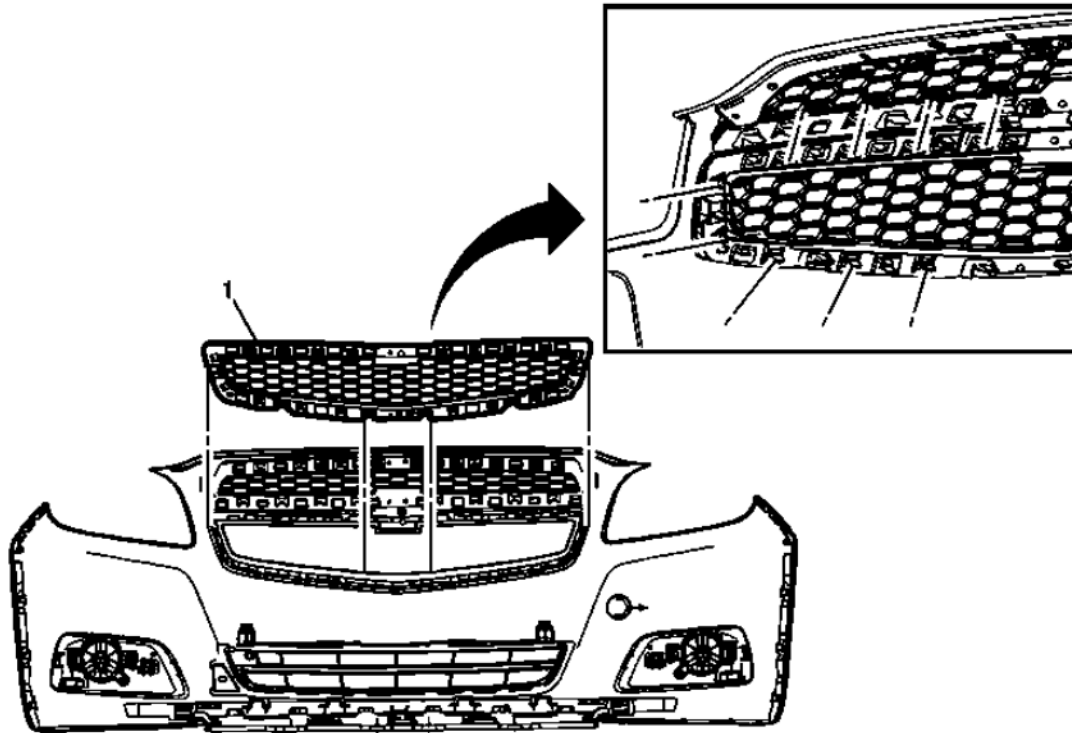


Fig. 4: Front Center Grille
Courtesy of GENERAL MOTORS COMPANY

Front Center Grille Replacement

Callout	Component Name
Preliminary Procedure Remove the radiator grille water deflector. Refer to <u>Radiator Grille Water Deflector Replacement</u> .	
1	Radiator Center Grille Procedure Release the retainer tabs while pulling the center grille from the center grille bezel.

RADIATOR GRILLE WATER DEFLECTOR REPLACEMENT

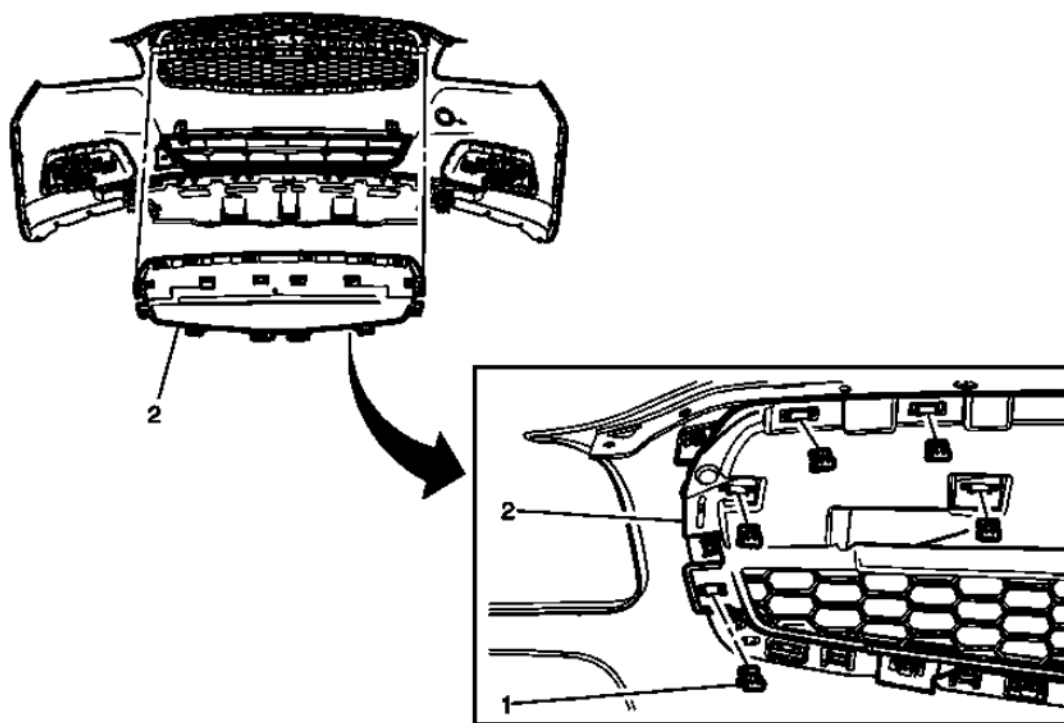


Fig. 5: Radiator Grille Water Deflector
 Courtesy of GENERAL MOTORS COMPANY

Radiator Grille Water Deflector Replacement

Callout	Component Name
Preliminary Procedure Remove the front bumper fascia. Refer to Front Bumper Fascia Replacement .	
1	Radiator Grille Water Deflector Retainer (Qty: 24) Procedure With a suitable tool, release the retainers from the radiator grille water deflector retainer tabs.
2	Radiator Grille Water Deflector

FRONT UPPER GRILLE REPLACEMENT

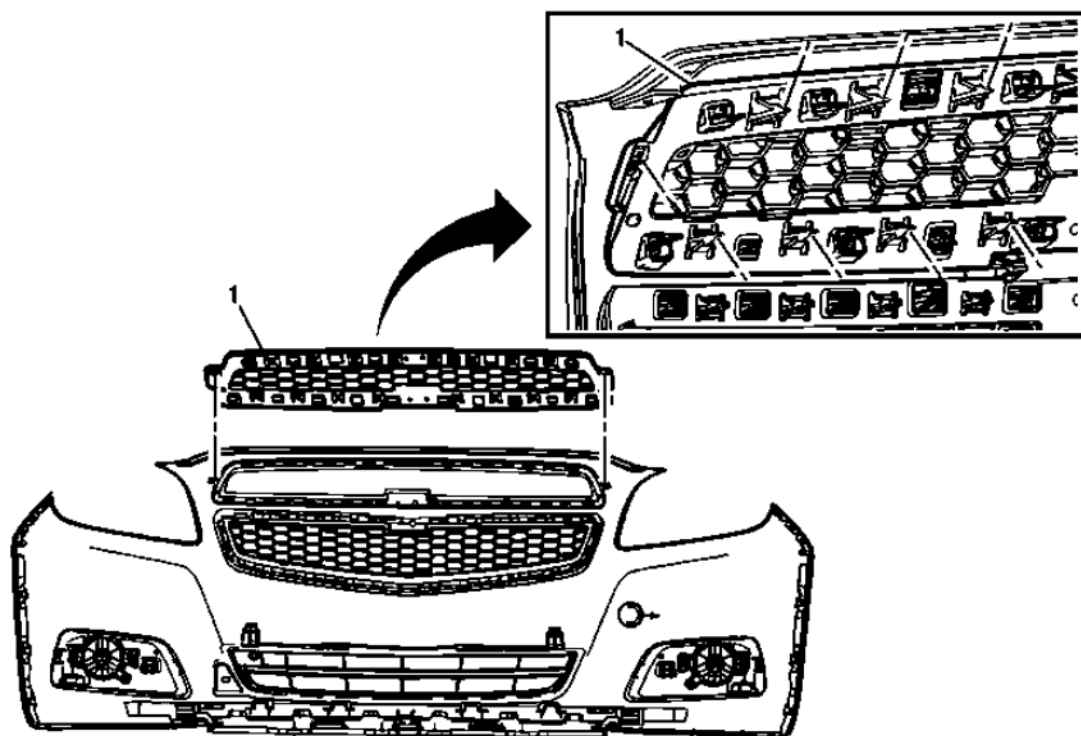


Fig. 6: Front Upper Grille

Courtesy of GENERAL MOTORS COMPANY

Front Upper Grille Replacement

Callout	Component Name
Preliminary Procedure Remove the radiator grille water deflector. Refer to Radiator Grille Water Deflector Replacement .	
1	Radiator Upper Grille Procedure Release the retainer tabs while pulling the upper grille from the upper grille bezel.

FRONT LOWER GRILLE REPLACEMENT

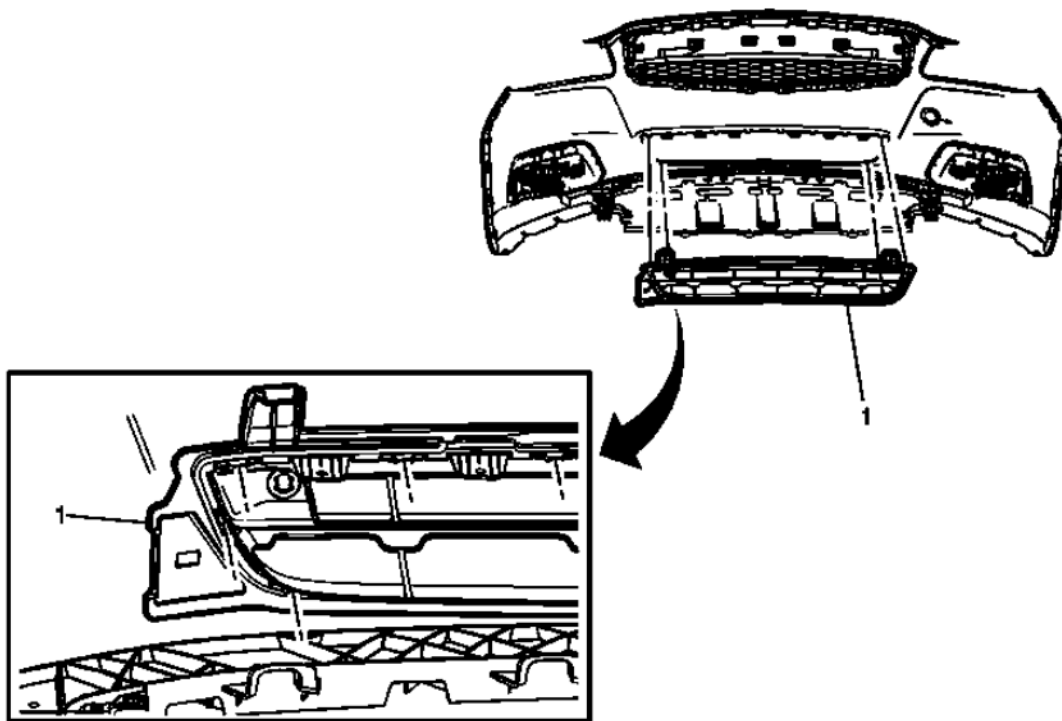


Fig. 7: Front Lower Grille
 Courtesy of GENERAL MOTORS COMPANY

Front Lower Grille Replacement

Callout	Component Name
Preliminary Procedure	
1. Remove the front bumper fascia air deflector. Refer to <u>Front Bumper Fascia Air Deflector Replacement</u> . 2. Remove the front bumper fascia upper energy absorber. Refer to <u>Front Bumper Fascia Energy Upper Absorber Replacement</u>	
1	Radiator Lower Front Grille Procedure Release the retainer tabs while pulling the lower grille from the front fascia.

RADIATOR GRILLE OPENING BEZEL REPLACEMENT - UPPER

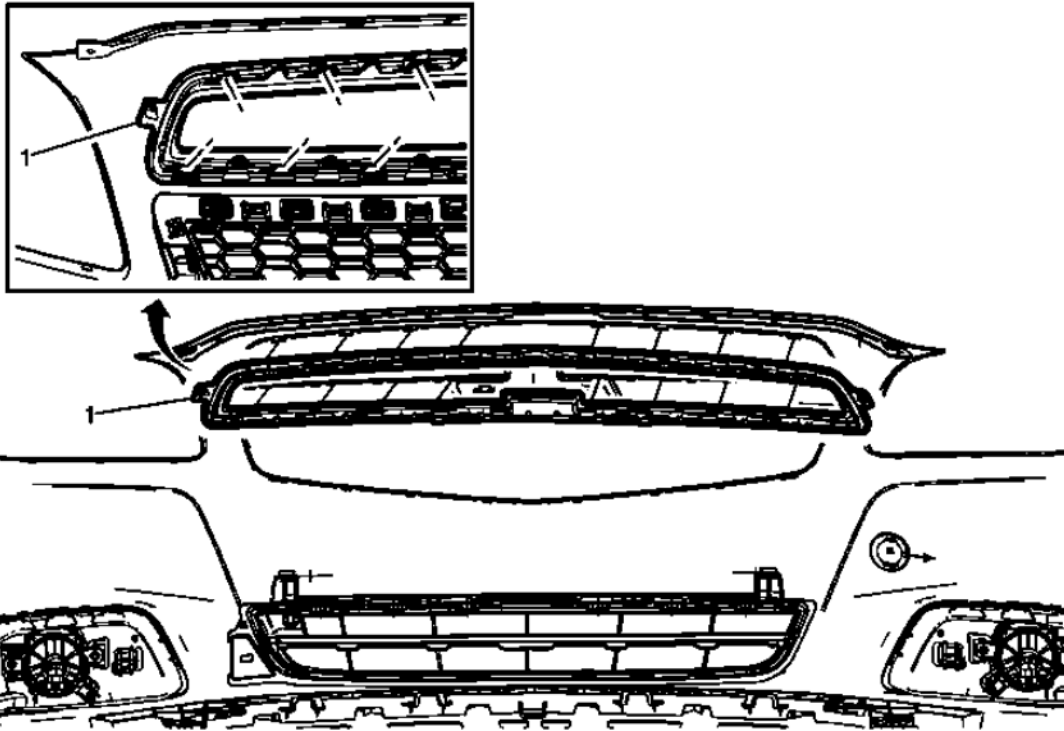


Fig. 8: Radiator Grille Opening Bezel
 Courtesy of GENERAL MOTORS COMPANY

Radiator Grille Opening Bezel Replacement - Upper

Callout	Component Name
Preliminary Procedure Remove the radiator upper grille assembly. Refer to Front Upper Grille Replacement .	
1	Radiator Grille Opening Bezel- Upper Procedure Release the retainer tabs while pulling the grille opening bezel from the front fascia.

RADIATOR GRILLE OPENING BEZEL REPLACEMENT - CENTER

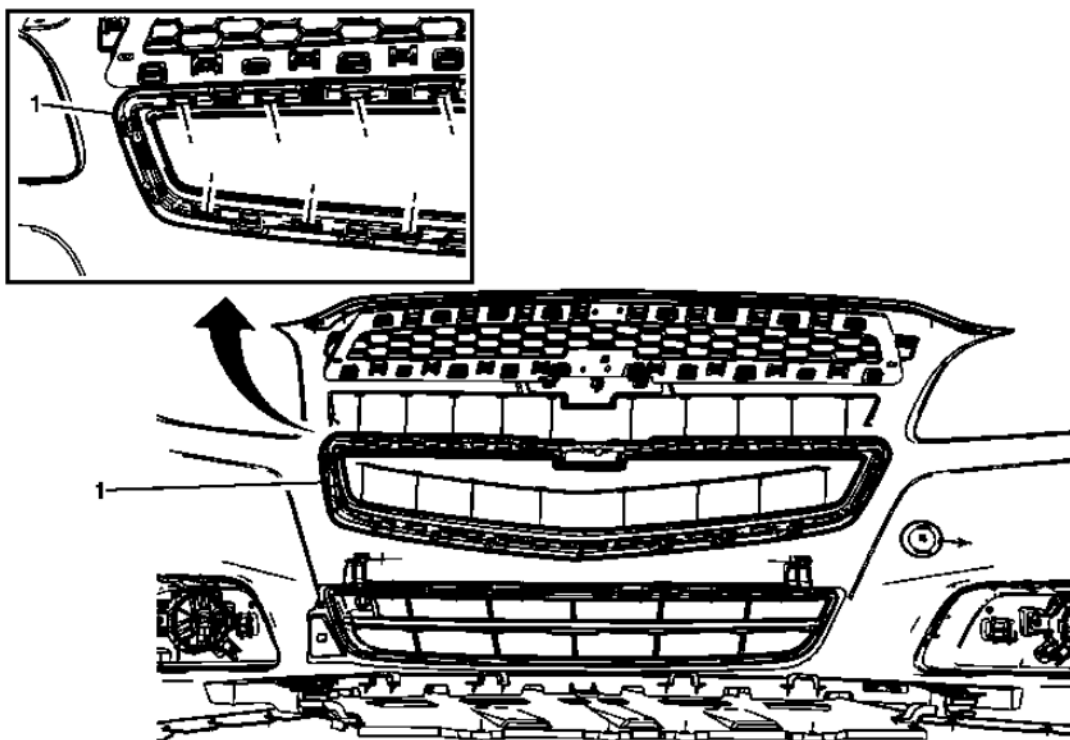


Fig. 9: Radiator Grille Opening Bezel
 Courtesy of GENERAL MOTORS COMPANY

Radiator Grille Opening Bezel Replacement - Center

Callout	Component Name
Preliminary Procedure Remove the radiator center grille assembly. Refer to Front Center Grille Replacement .	
1	Radiator Grille Opening Bezel- Center Procedure Release the retainer tabs while pulling the grille opening bezel from the front fascia.