CABIN AIR FILTERS

Dust & Pollen Filter - MDX

REMOVAL & INSTALLATION

NOTE: Manufacturer's terminology for this filter is dust and pollen filter.

CABIN AIR FILTER

Removal & Installation (2001-2006)

1. While holding the glove box (A), remove the glove box stop (B) on each side. See **Fig. 1** . Detach the lock (C) from the damper (D).

cardiagn.com

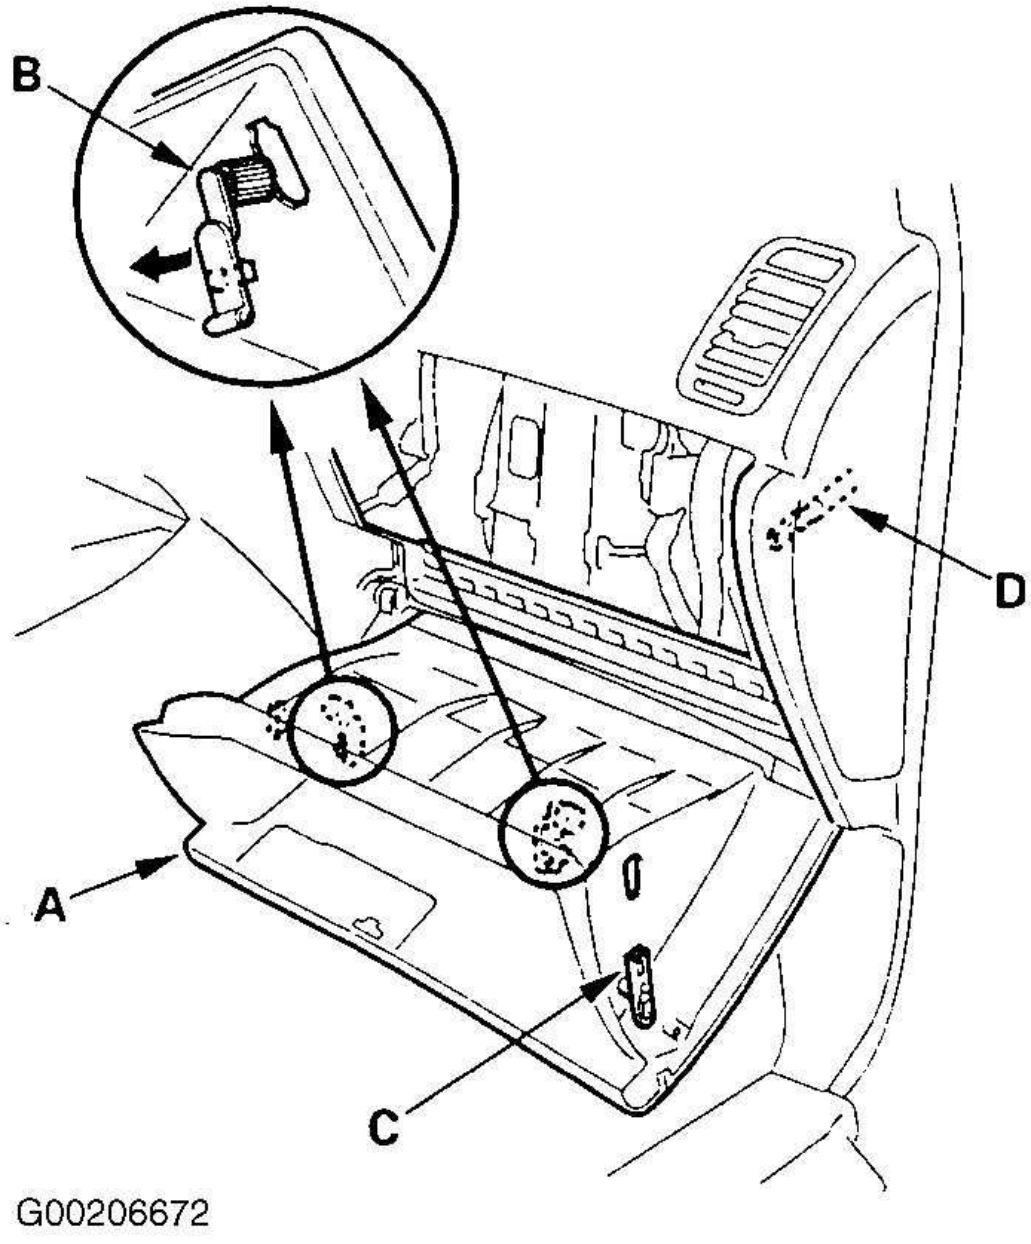

Fig. 1: Removing Glove Box Stops
Courtesy of AMERICAN HONDA MOTOR CO., INC.

2. Remove the bolts, then remove the glove box (A). See **Fig. 2** .

cardiagn.com

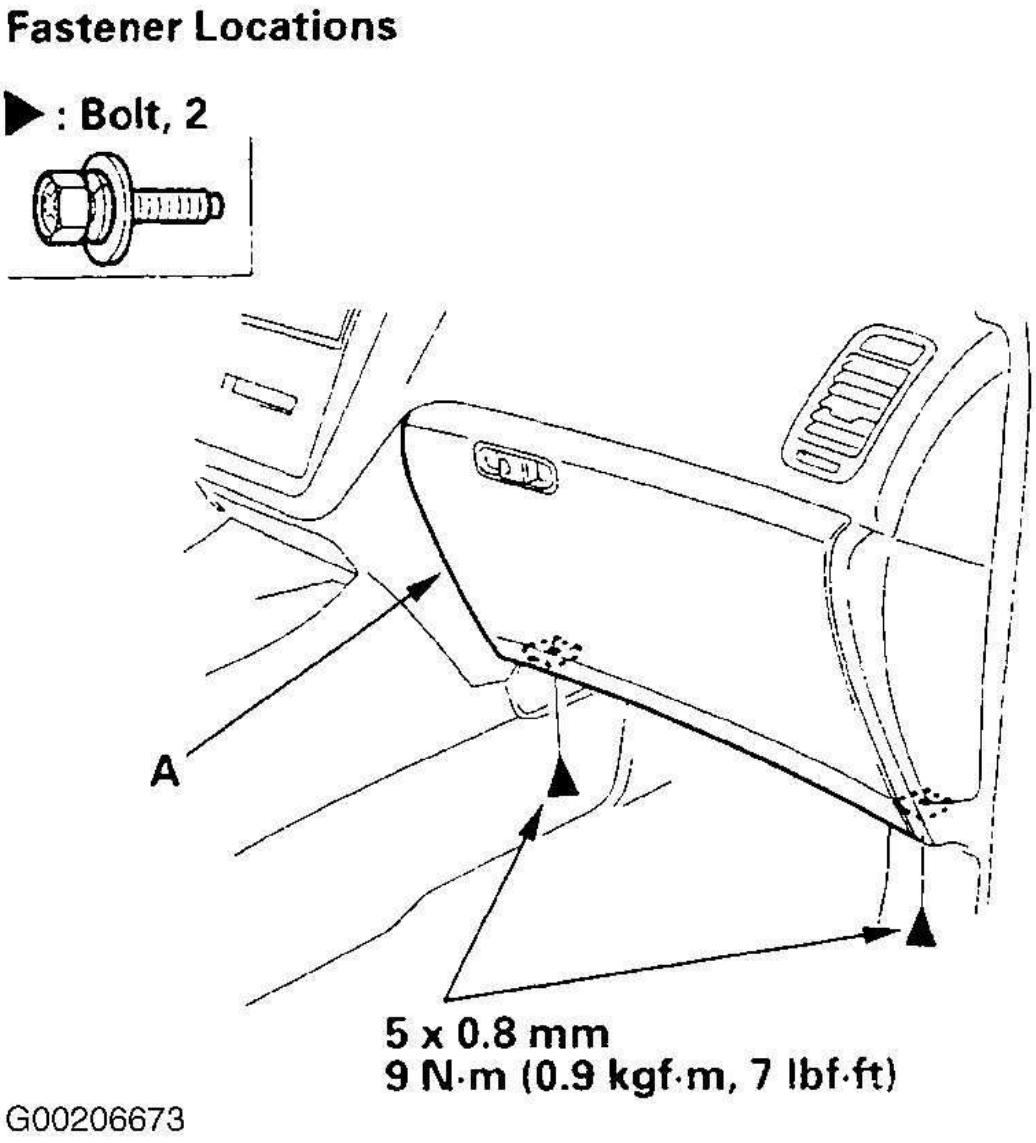

Fig. 2: Removing Glove Box
Courtesy of AMERICAN HONDA MOTOR CO., INC.

3. Remove the bolts, then remove the damper. See **Fig. 3** .

cardiagn.com

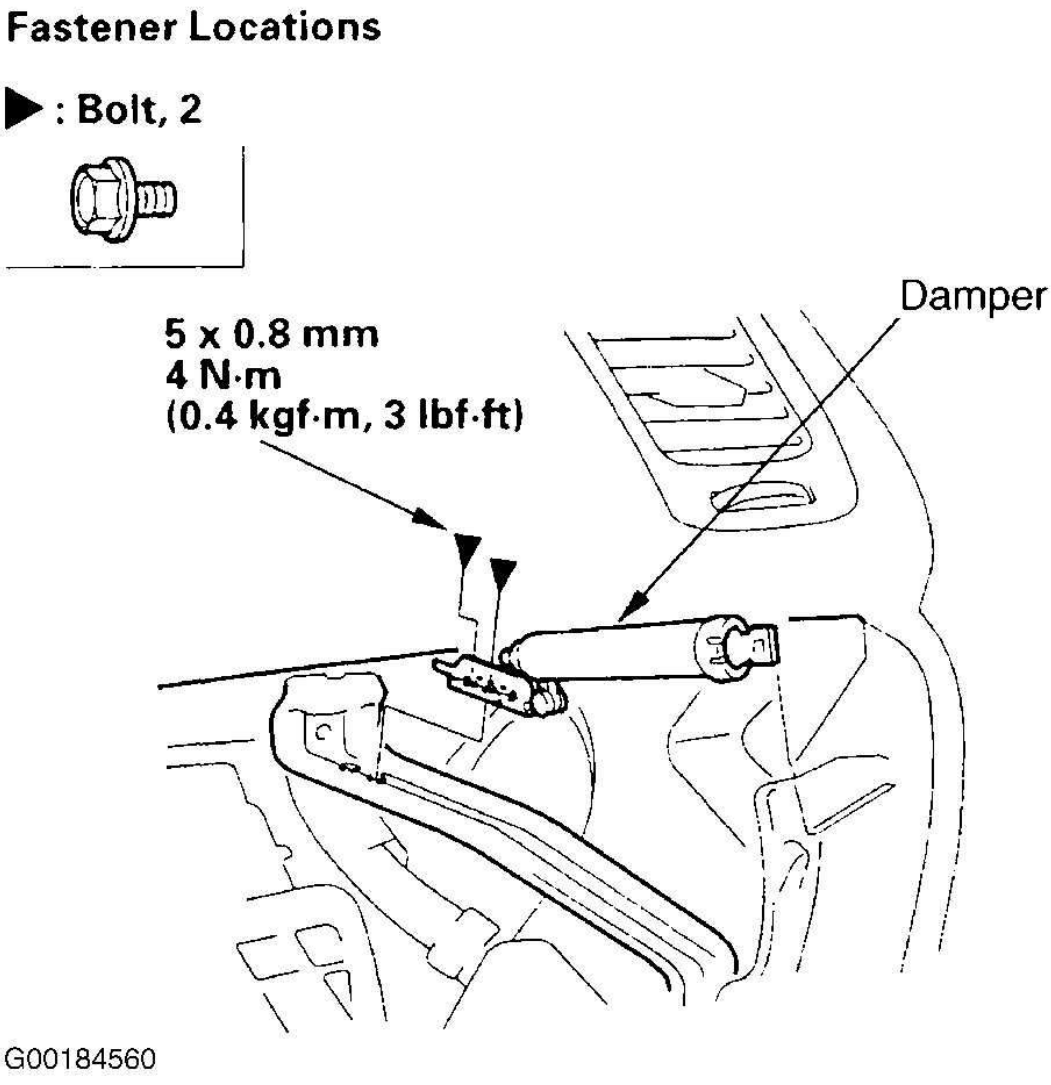

Fig. 3: Removing Glove Box Damper
Courtesy of AMERICAN HONDA MOTOR CO., INC.

4. If necessary, cut the plastic cross brace in the glove box opening with diagonal cutters in the area shown, and discard it. See **Fig. 4** .

cardiagn.com

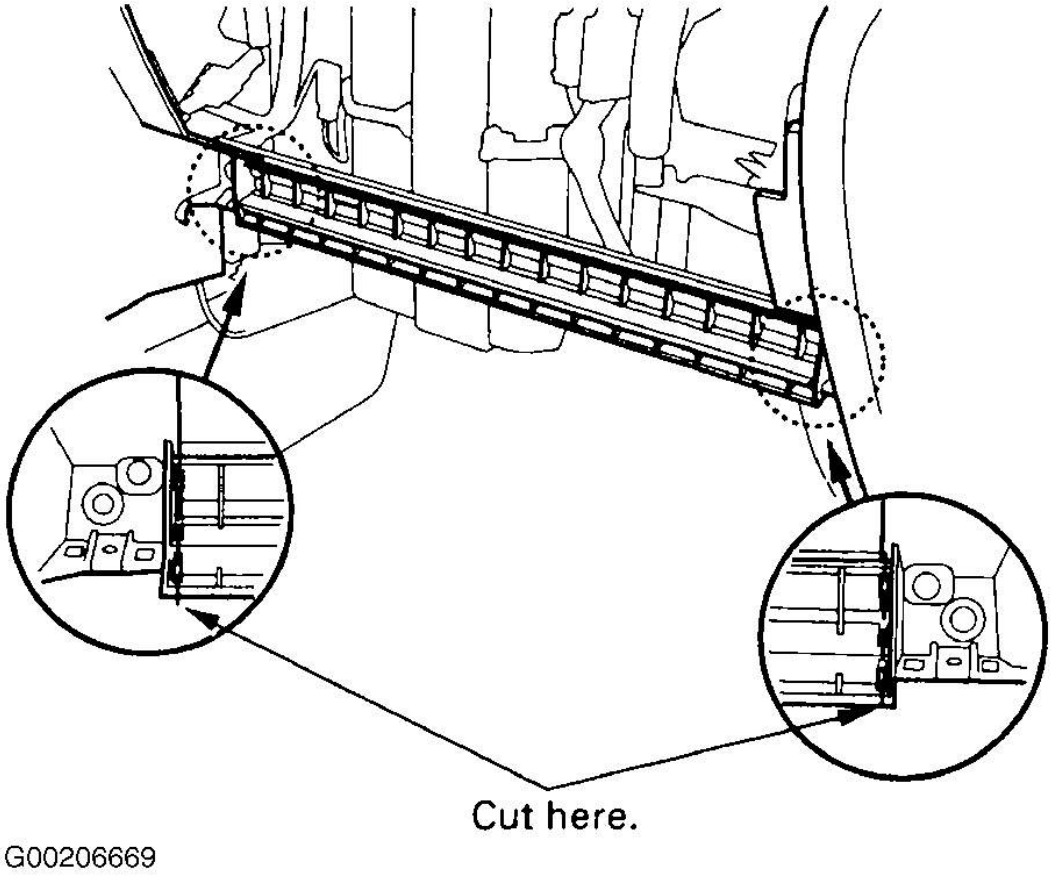

Fig. 4: Cutting Plastic Cross Brace (If Necessary)
Courtesy of AMERICAN HONDA MOTOR CO., INC.

5. Remove the bolts, the screws and the glove box frame. See **Fig. 5** .

cardiagn.com

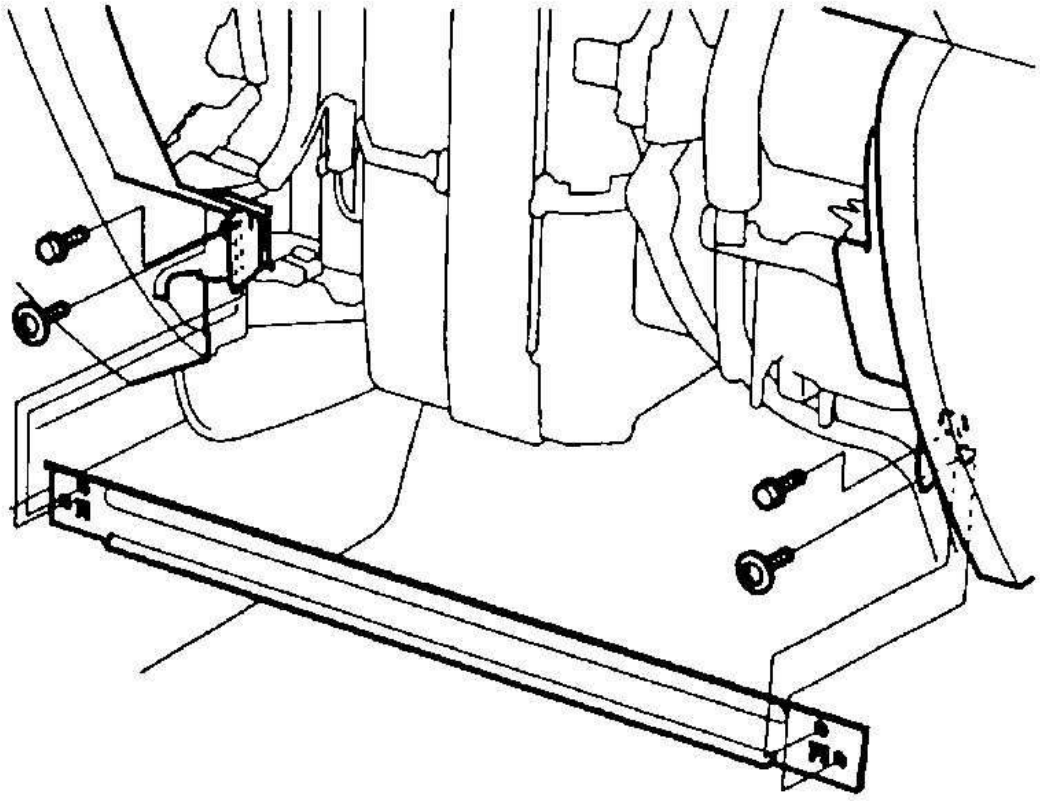

Fig. 5: Removing Glove Box Frame
Courtesy of AMERICAN HONDA MOTOR CO., INC.

6. Remove the filter lid (A) from the evaporator, then pull out the dust and pollen filter (B). See **Fig. 6** .

cardiagn.com

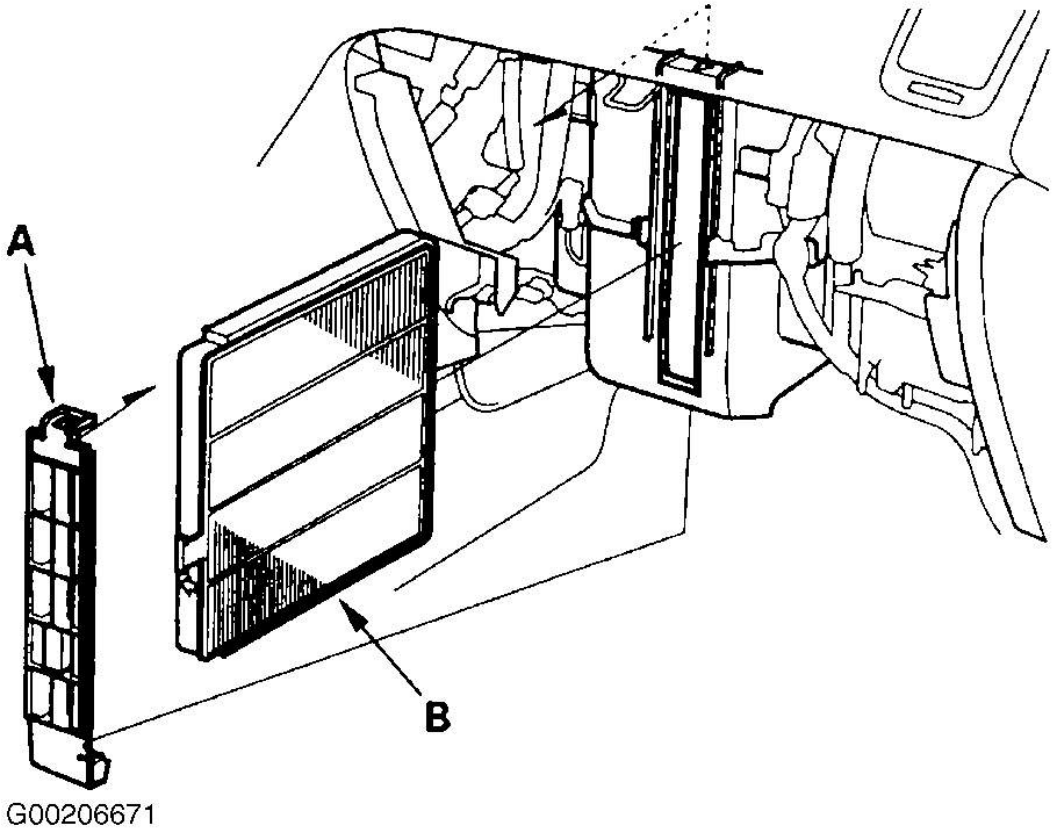

Fig. 6: Removing Dust & Pollen Filter
Courtesy of AMERICAN HONDA MOTOR CO., INC.

7. To install filter, reverse removal procedure.

cardiagn.com