
BODY ELECTRICAL

46.1	CAN SYSTEM	1779
1	Warnings and Precautions	1779
1.1	Precautions	1779
2	System Principle	1779
3	DIAGNOSIS & TEST	1779
3.1	Problem Symptoms Table	1779
3.2	Diagnosis Procedure	1780
3.3	DTC Confirmation Procedure	1781
3.4	Intermittent DTC Troubleshooting	1781
3.5	Ground Inspection	1782
3.6	Failure Analysis Method	1782
3.7	Common Troubleshooting	1782
3.8	Oscilloscope Analysis	1786
4	ON-VEHICLE SERVICE	1796
4.1	Tools	1796
4.2	Gateway Module (CGW)	1796

46.1 CAN SYSTEM

1 Warnings and Precautions

1.1 Precautions

In order to avoid possible property loss, personal injury or death, always follow the instructions below before repair.

- (1) Read configuration code of CGW module and record it with a diagnostic tester, before removing gateway module.
- (2) Try to prevent interior and body paint surface from being scratched, when removing gateway module.
- (3) Perform power-off for 5 minutes when measuring resistance in vehicle.

2 System Principle

- Bus speed: 500 Kbit/s.
- Cannot run in single line - If a CAN line of module is disconnected, CAN signal of this module cannot be transmitted.
- Vehicle driving CAN diagnosis is performed through No.6 pin and No.14 pin of diagnostic interface.
- Most controllers and diagnostic interfaces of data communication system are connected via vehicle gateway module (VGW), CAN controller and CAN transceiver are integrated into gateway module. Terminal resistors are respectively integrated into VGW, IPC(DMC), ESP, EMS and IHU(DMC), forming a body CAN bus with VGW and IPC as terminal nodes. EMS and VGW are power CAN bus of terminal nodes, IHU and VGW are information entertainment CAN bus of terminal nodes, and ESP and VGW are chassis CAN bus of terminal nodes. Termination resistance is 120 Ω , termination resistance of gateway module connected with diagnostic interface is 60 Ω .
- CAN bus is a vehicle bus, and full name is "Controller Area Network" which connects the controllers in some form to form a complete system. Each control unit collects different signals by each sensor, and transmits data among modules under the same rules. Network information can meet different real-time requirements by its priority. CAN bus data transmitted by control unit is level signal of binary format, and data transmission line transmits the voltage signal.

3 DIAGNOSIS & TEST

3.1 Problem Symptoms Table

 Caution Use symptoms table below to help determine cause of problem. Check each suspected area in sequence. Repair, replace or adjust faulty components as necessary.	
Symptom	Possible Cause
Diagnostic interface cannot access to the system	Fuse
	CAN bus
	Gateway module
Engine control system failure	CAN bus
	Battery voltage
	Module damage
	Ground wire
Brake control system failure	Wire harness or connector
	EPB module

Symptom	Possible Cause
Airbag system failure	ECM
	Wire harness and connector
	Airbag module failure
Body electrical failure	Body Control Module (BCM) failure
	Wire harness or connector
	Instrument cluster
Transmission failure	Transmission Control Module (TCU) failure
	Wire harness or connector
	ECM

3.2 Diagnosis Procedure

Hint:

Use following procedures to troubleshoot the control system.

1	Vehicle brought to workshop
---	-----------------------------

Next

2	Examine vehicle and check basic items
---	---------------------------------------

Check system power supply voltage, and check that fuse, wire harness and connector are connected normally.

OK

Standard voltage: Not less than 12 V.

Result

NG

Check and replace malfunctioning parts

OK

3	Using a diagnostic tester, read related DTC and data stream information
---	---

Result

Result	Go to
No DTC	A
DTC is output	B

A

Perform troubleshooting procedure without DTCs according to malfunction symptom

B

4	Troubleshoot according to DTCs troubleshooting procedure
----------	---

Result

Result	Go to
Problem is not resolved	A
Problem is resolved	B

A

Return to procedure 1 and troubleshoot the process again

B

5	According to airbag system malfunction repair completion inspection and delivery, confirm that malfunction is resolved.
----------	--

Result

Result	Go to
Delivery inspection is failed	A
Delivery inspection is qualified	B

A

Return to procedure 1 and troubleshoot the process again

B

6	Finished
----------	-----------------

3.3 DTC Confirmation Procedure

Confirm that battery voltage is normal before performing following procedures.

- Turn ENGINE START STOP switch to OFF.
- Connect the diagnostic tester (the latest software) to Data Link Connector (DLC).
- Turn ENGINE START STOP switch to ON.
- Use diagnostic tester to record and clear DTCs stored in supplemental restraint system.
- Turn ENGINE START STOP switch to OFF and wait for several seconds.
- Turn ENGINE START STOP switch to ON, and then select Read DTC.
- If DTC is detected, it indicates current malfunction. Go to inspection procedure - Step 1.
- If no DTC is detected, malfunction indicated by the DTC is intermittent.

3.4 Intermittent DTC Troubleshooting

If malfunction is intermittent, perform the followings:

- Check if connector is loose.
- Check if wire harness is worn, pierced, pinched or partially broken.
- Monitor diagnostic tester (the latest software) data that is related to this circuit.
- Wiggle related wire harnesses and connectors and observe if signal is interrupt in related circuit.
- If possible, try to duplicate the conditions under which DTC was set.

- Look for data that has changed or DTC to reset during wiggle test.
- Look for broken, bent, protruded or corroded terminals.
- Inspect airbag components and mounting areas for damage, foreign matter, etc. that will cause incorrect signals.
- Check and clean all wire harness connectors and ground parts related to DTC.
- If multiple trouble codes were set, refer to circuit diagrams to look for any common ground circuit or power supply circuit applied to DTC.
- Refer to any Technical Bulletin that may apply to this malfunction.

3.5 Ground Inspection

Ground points are very important to the proper operation of circuits. Ground points are often exposed to moisture, dirt and other corrosive environments. Corrosion (rust) may increase load resistance. This situation may change the way in which a circuit operates. Circuits are very sensitive to proper grounding. A loose or corroded ground can seriously affect the control circuit. Check the ground points as follows:

- (1) Remove ground bolt or nut.
- (2) Check all contact surfaces for tarnish, dirt and rust, etc.
- (3) Clean as necessary to ensure that contact is in good condition.
- (4) Reinstall ground bolt or nut securely.
- (5) Check if any additional accessories interfere with ground circuit.
- (6) If several wire harnesses are crimped into one ground terminal, check for proper crimp condition. Make sure that all wire harnesses are clean and securely fastened while providing a proper ground path.

3.6 Failure Analysis Method

- (1) Use diagnostic tester to diagnose and analyze the trouble code.

When a module or several modules need to receive the data sent by a module to complete the corresponding function, once the data is not received, the module received the data will generate trouble codes, which could be read by diagnostic tester as: "Lost communication with XX module" , "Communication with XX module is not normal" ; When the bus is out of work, the trouble code will be read as CAN bus close; When there is malfunction on module CAN configuration, code will be reported as "configuration code error" .

CAN network failures consist of the following types:

- 1) Receive continuous invalid signals: This type of fault indicates communication effective bit received by control module is "invalid" or invalid signal after processing.
 - 2) Signal is below normal range: This type of fault indicates serial data bus signal is below normal range.
 - 3) Signal is above normal range: This type of fault indicates serial data bus signal is above normal range.
 - 4) Invalid signal: This type of fault indicates serial data bus signal does not match specified execution condition.
 - 5) Lost signal: This type of fault indicates specified no specified information is received.
 - 6) Bus closed: This type of fault indicates bus is out of work.
 - 7) Unstable signal: This type of fault indicates a transient distortion or interruption of a bus signal.
- (2) Waveform analysis.

It is main method to determine the hardware fault of CAN bus system. Check operation of high speed CAN and low speed CAN and judge most CAN network hardware faults through oscilloscope.

For example, if bus waveform is abnormal, after sales staff can judge by "plug and unplug each joint and observe the waveform of oscilloscope at the same time" . If bus waveform is normal after unplugging a joint, the fault is in the module or the bus connected this module. This method is especially suitable for modules that do not have trouble code self-diagnosis.
 - (3) Circuit diagram analysis.

Use multimeter, oscilloscope, diagnostic tester and combine with circuit diagram to determine where is the fault.

3.7 Common Troubleshooting

- (1) Diagnostic tester reads trouble code of CAN configuration error.

Fault expression: CAN or configuration code error is not performed by meter or BCM, read "Software configuration error", "Configuration code error" with diagnostic tester.

Exclusion methods and steps:

This type of situation usually belongs to CAN system software failure. Write correct configuration code to these modules or sensors or calibrate these sensors, clear the trouble code and verify the malfunction phenomenon again.

- (2) Diagnostic tester cannot communicate with all modules.

Malfunction symptom: If diagnostic tester can be used normally on other vehicle, but cannot communicate with each module on faulty vehicle, malfunction indicators or warning lights on the meter turn on.

Malfunction reason: Diagnostic interface power supply and ground malfunction, diagnostic interface CAN line is open to normal CAN line, bus CAN-H is short to CAN-L, CAN-H is short to ground, CAN-L is short to ground, CAN-H is short to power supply, CAN-L is short to power supply, CAN line is mixed, node (-module) is malfunctioning or power supply grounding is abnormal.

- (3) Exclusion methods and steps:

1 Diagnose if power supply voltage and grounding resistance are correct

NG

Inspect and repair diagnosis interface power supply or ground, verify the fault phenomenon again

OK

2 Use multimeter to detect parallel termination resistor, and check if resistance is correct

NG

Check and repair connecting wire between diagnostic interface and two modules with termination resistor or replace module with incorrect resistance to verify the malfunction symptom again.

OK

3 Connect oscilloscope and observe waveform at the same time. Observe if waveform is normal.

NG

Inspect and repair the power supply and ground of these modules, and verify the malfunction symptom again.

OK

4 Determine type of fault waveform, inspect and repair, then reconfirm the fault phenomenon again.

- (4) The diagnostic tester cannot communicate with several modules.

Malfunction symptom: The diagnostic tester cannot communicate with several modules, but can communicate with at least one module.

Malfunction cause: Module power supply malfunction, CAN main line open, CAN line mixed fitting, node (module) malfunction, gateway module malfunction.

(5) Power supply malfunction (power supply and ground).

The core part of vehicle multiplex system is an electronic control unit containing a communication IC chip. The normal operating voltage of the electronic control unit is generally in the range of operating voltage: $9\text{ V} \leq U \leq 16\text{ V}$. CAN network communication voltage range: $6\text{ V} \leq U \leq 16\text{ V}$. If the operating voltage provided by vehicle power system is lower than this value, some electronic control units with higher requirements on operating voltage will temporarily stop working, thus making multiplex system unable to communicate. The CAN hardware controller inside ECM may not work under 6 V . Use battery tester to detect, if it does not meet the requirements, charge the battery or replace the battery (and also detect the power generated by alternator).



(6) Link malfunction.

Link refers to a communication connection line between nodes. Link malfunction refers to malfunction of data communication lines, such as short circuit, open circuit and communication signal attenuation or distortion caused by changes in physical properties of the lines. These factors often cause multiple electronic control units to fail to work properly or the control system to operate improperly. To determine whether the link is malfunctioning, use an oscilloscope or a specific vehicle CAN tester to observe whether the current data communication signal matches the standard data communication signal. Maintenance methods are generally to repair shorted or open twisted-pair lines, or to eliminate the root cause of changing the physical properties of twisted-pair lines.

1) Maintenance instructions for CAN line.


Sometimes, in order to determine the malfunction, it is necessary to disconnect a control unit from line connection point and disconnect the CAN bus connected to the control unit, or to repair wire harness after the malfunction has been determined. The data transmitted by CAN bus may even affect vehicle safety and life safety of personnel. Improper maintenance of CAN bus may cause interference or loss of signals, resulting in these data not being transmitted. Therefore, the following regulations must be observed during maintenance:

- During CAN bus maintenance, the disconnection point is required to be at least 100 mm away from the line node, and the line node must never be opened, maintained and updated.
- If the CAN line is to be disconnected, it is only allowed to be carried out at a distance of $\geq 100\text{ mm}$ from the next pressure node; The twisting of CAN lines is of decisive significance to the interference effect of CAN. Only if the twisting is not damaged, the CAN can be protected from interference, so keep as little interference with the twisting as possible during maintenance.

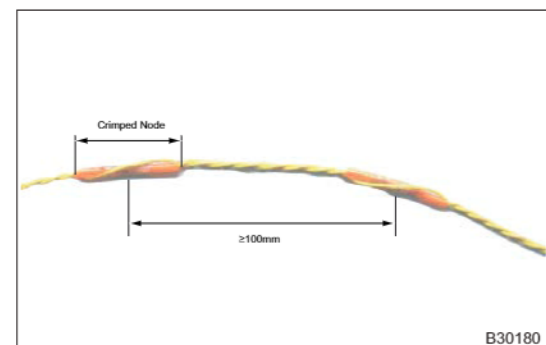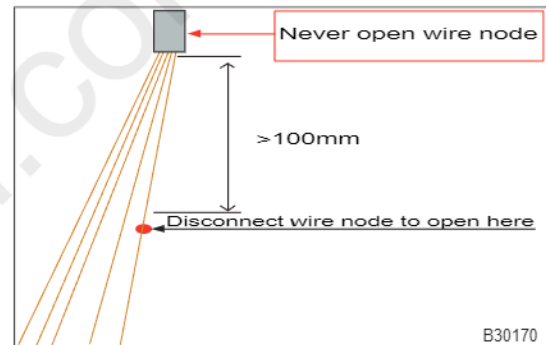


2) Use a multimeter to measure the resistance to ground and power supply of CAN-H and CAN-L.

- After disconnecting battery for 5 minutes, the measured resistance values between diagnostic interfaces 6# (CAN-H) and 14# (CAN-L) and ground are both 32 MΩ.

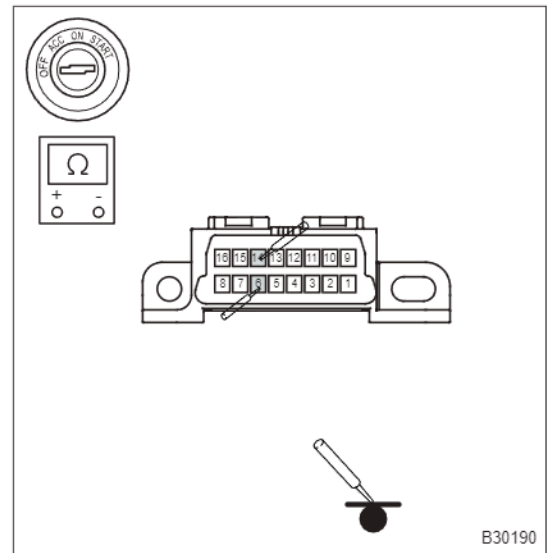

- After disconnecting battery for 5 minutes, the measured resistance values between diagnostic interfaces 6# (CAN-H) and 14# (CAN-L) and 16# are both 33.5 MΩ.

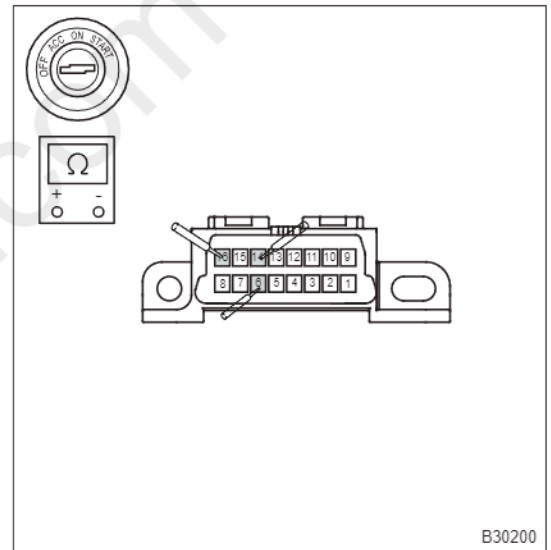


3) Termination resistor.

The termination resistor is installed in gateway module of system and is used to prevent CAN bus signal from reflecting the changing voltage on CAN bus. When the termination resistor fails and the square wave is transmitting, because of the reflection of line, if it is serious, the signal will be deformed and the signal of control unit will be invalid. When measuring the CAN bus signal with an oscilloscope, if the signal does not match standard signal, it is also necessary to check whether the termination resistor is damaged.

Measurement step of termination resistor:

- (1) Turn ENGINE START STOP switch to OFF, disconnect the negative battery cable;
- (2) Wait about 5 minutes until all capacitors are fully discharged;
- (3) Connect the measuring instrument and measure total resistance. Using ohmmeter, measure resistance between diagnostic interfaces (6) and (14) (standard resistance is 60 Ω).

Measured value (for reference only): the measured resistance between diagnostic interfaces 6 # and 14 # is 58.7 Ω (the two termination resistors are connected in parallel), after gateway module is disconnected separately, and the measured resistance between diagnostic interfaces 6 # and 14 # is ∞ .

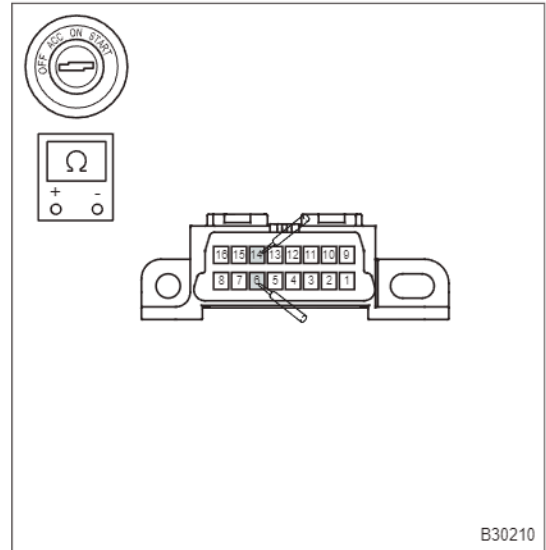


B30210

3.8 Oscilloscope Analysis

(1) Oscilloscope connection

CH1 (channel 1) is connected to diagnostic interface 6# (CAN-H), CH2 (channel 2) is connected to diagnostic interface 14# (CAN-L), and alligator clip of the oscilloscope probe is connected to the common body ground.

Normal waveform

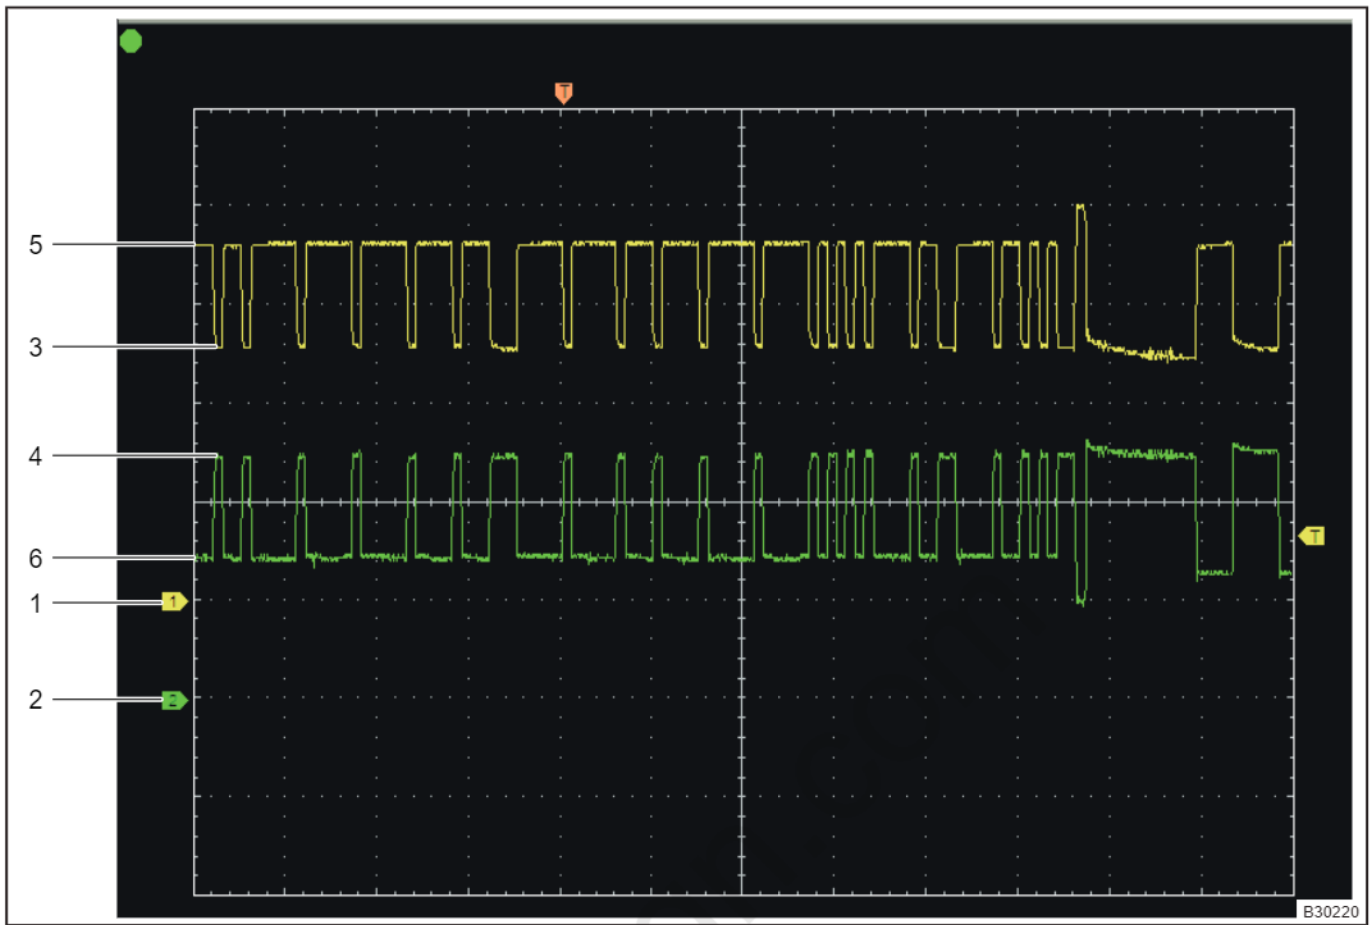

B30220

1	Zero potential of CAN-H	4	The recessive voltage potential of CAN-L is approximately 2.5 V (logic value 1)
2	Zero potential of CAN-L	5	The dominant voltage potential of CAN-H is approximately 3.6 V (logic value 0)
3	The recessive voltage potential of CAN-H is approximately 2.6 V (logic value 1)	6	The dominant voltage potential of CAN-L is approximately 1.4 V (logic value 0)

Poten- tial	CAN-H - Ground	CAN-L - Ground	Voltage Difference
Domin- ant	3.6 V (3.5 V)	1.4 V (1.5 V)	2.2 V (2.0 V)
Reces- sive	2.6 V (2.5 V)	2.5 V (2.5 V)	0.1 V (0 V)

Hint:


- 1) Always use voltage difference between two lines to confirm data. When voltage of CAN-H rises, the voltage of CAN-L decreases accordingly. The waveform is rectangular and symmetrical.
- 2) As the oscilloscope shows, CAN-Bus has only two operating states. At the recessive voltage potential, the two voltage values are very close. At the dominant voltage potential, the two voltage standard difference is 2.0 V.
- 3) The difference between measured voltage value and standard value is approximately 100 mV.
- 4) During communication, high-speed CAN operating voltage range: CAN-H: 2.75 V~4.5 V (dominant), 2 V~3 V (recessive); CAN_L: 0.5 V~2.25 V (dominant), 2 V~3 V (recessive); No signal transmission means that CAN bus will transmit recessive signals when it is idle, and new information will start with dominant signals.

(2) Short point (arrow) between CAN-H and CAN-L



Short circuit malfunction waveform of CAN-H and CAN-L


- Observe with an oscilloscope, the voltage potential is at recessive voltage value (approximately 2.5 V). By moving the position of zero potential on two oscilloscope channels to make the zero potential of two channels be coincident. It can be seen that waveforms of the CAN-H and CAN-L change consistently and their potentials are consistent;
- The short circuit waveforms of CAN-H and CAN-L during actual vehicle test are shown in following illustration. Both waveforms are straight line with a voltage of approximately 2.5 V. Use a multimeter to test that the termination resistor is close to or equal to 0 ohms. Power CAN and body CAN, CAN-H and CAN-L short circuit vehicles can not start.

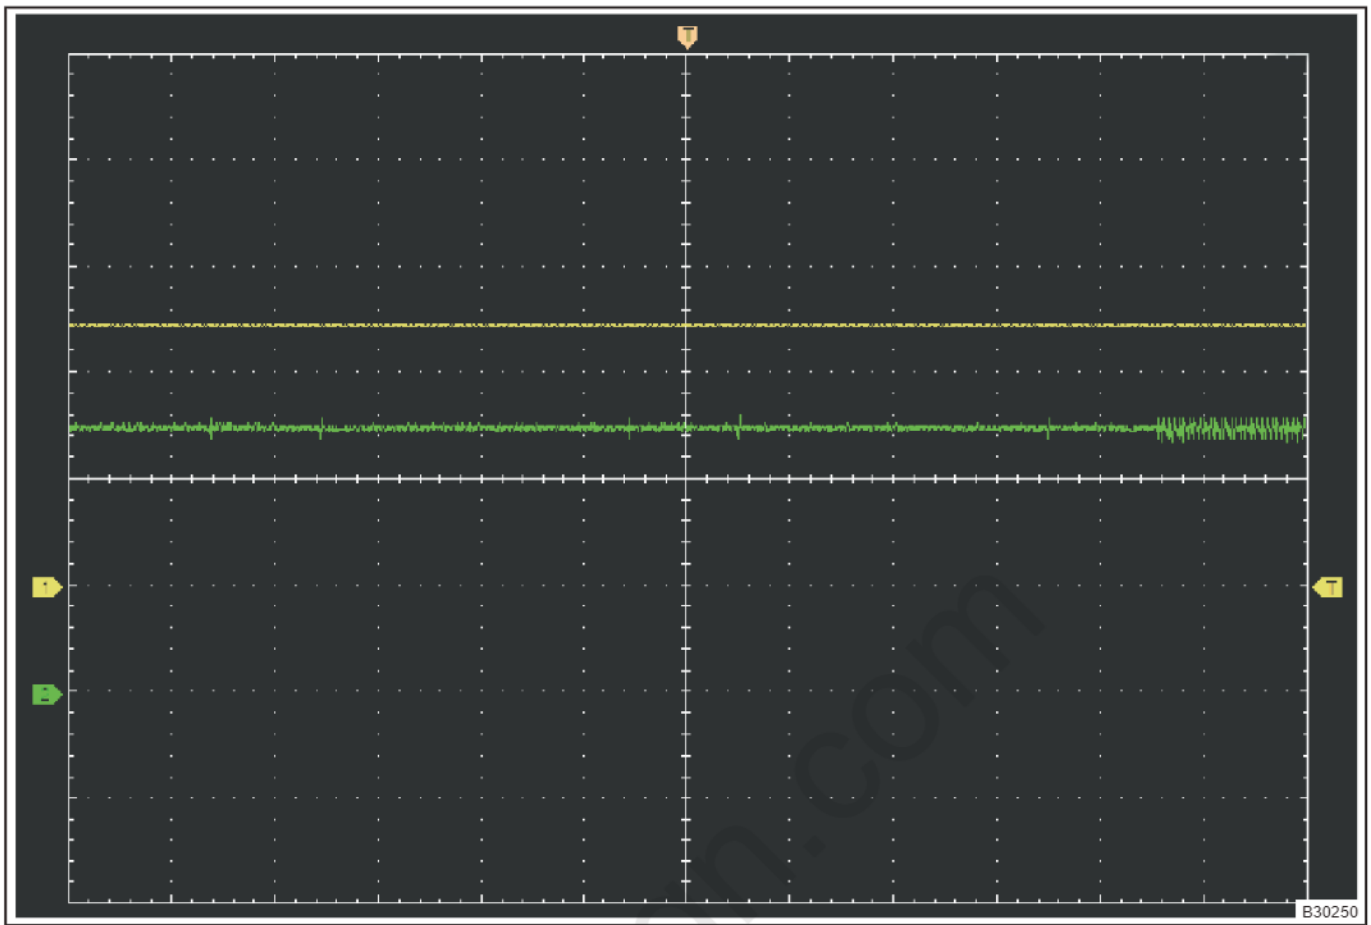

Troubleshooting procedures:

- 1) By plugging and unplugging control unit on CAN bus one by one and observing oscilloscope waveform at the same time, it can be judged whether it is a short circuit caused by the control unit or by the CAN-H and CAN-L line connection;
- 2) If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
- 3) For short circuit caused by short circuit of line, it is necessary to disconnect CAN wire groups (CAN-H and CAN-L) from wire harness connector or wire harness node in turn, and pay attention to waveform of oscilloscope; After disconnecting faulty wire group, waveform of oscilloscope returns to normal.
- 4) When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.

(3) CAN-H is short to power supply

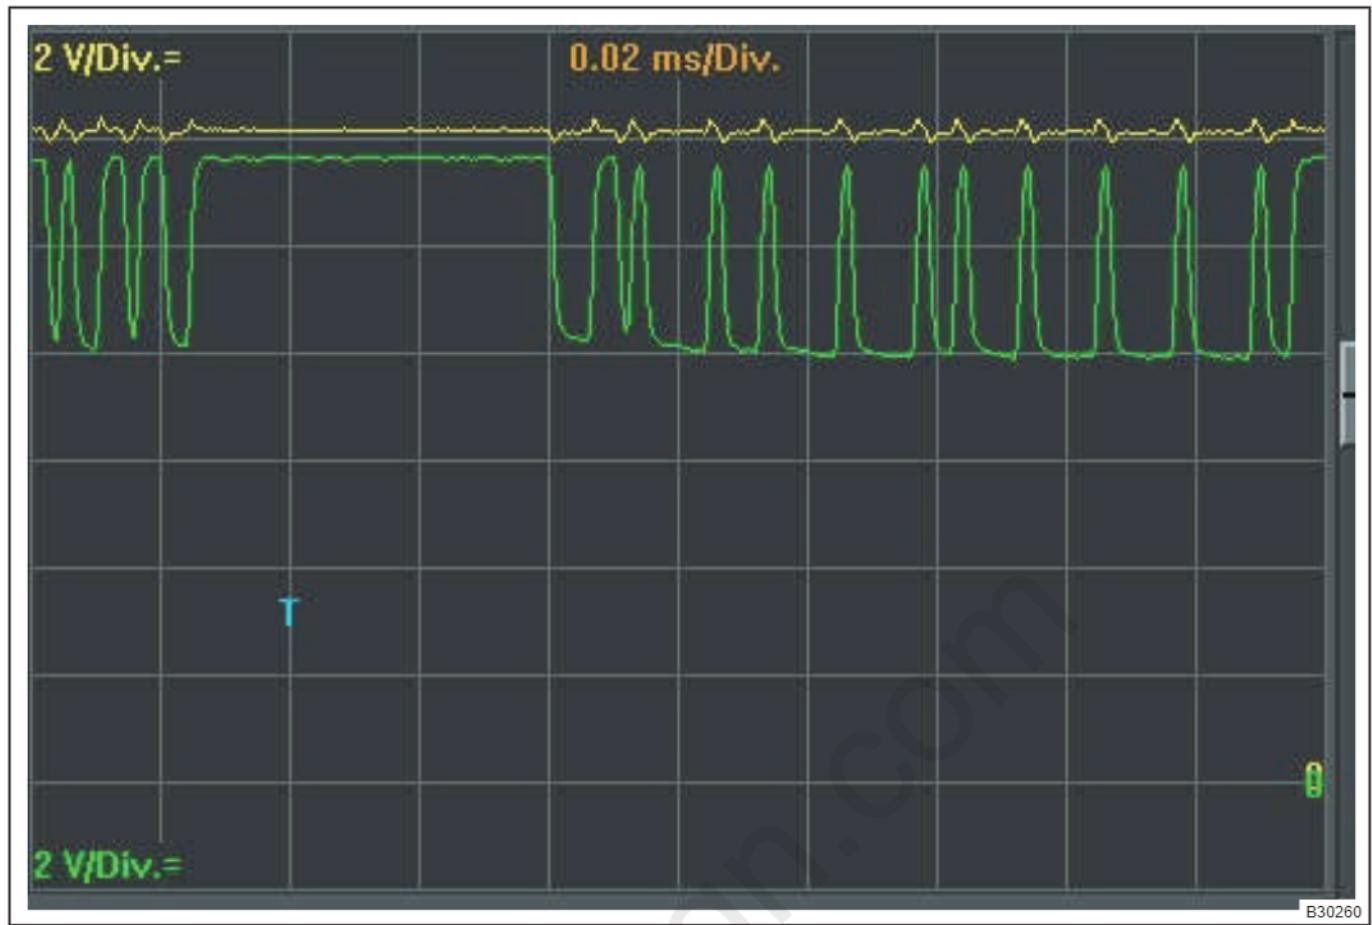


Malfunction symptoms:


- Observe with an oscilloscope: the voltage potential of CAN-H line is placed at 12 V, the recessive voltage of CAN-L line is placed at approximately 12 V, and amplitude becomes larger due to internal connection of CAN-H and CAN-L in transceiver of control unit.

Troubleshooting procedures:

- 1) By plugging and unplugging control unit on CAN bus one by one and observing oscilloscope waveform at the same time, it can be judged whether it is a short circuit caused by the control unit or by the CAN-H line connection;
 - 2) If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
 - 3) When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.
- The short circuit waveform to positive in CAN-H during actual vehicle test is shown in following illustration. The voltage potential of CAN-H line is placed at 12 V (battery voltage), and the recessive voltage of CAN-L line is placed at approximately 12 V (battery voltage). The amplitude becomes larger. The diagnostic tester cannot access each module. Power CAN and body CAN, CAN-H short to power supply, vehicles can not start.

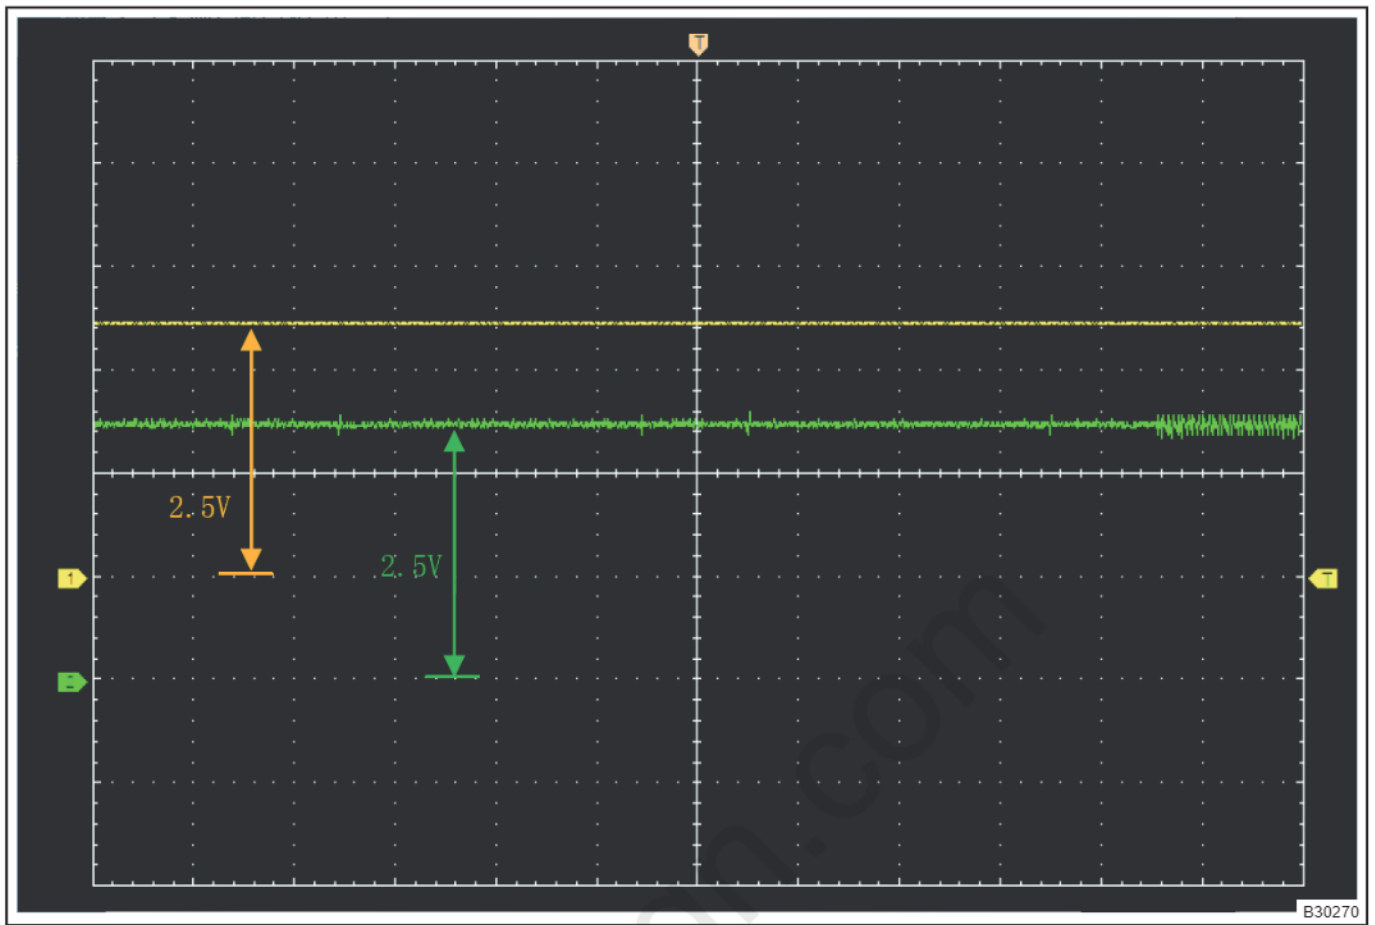

- (4) CAN-H is short to ground
Malfunction waveform

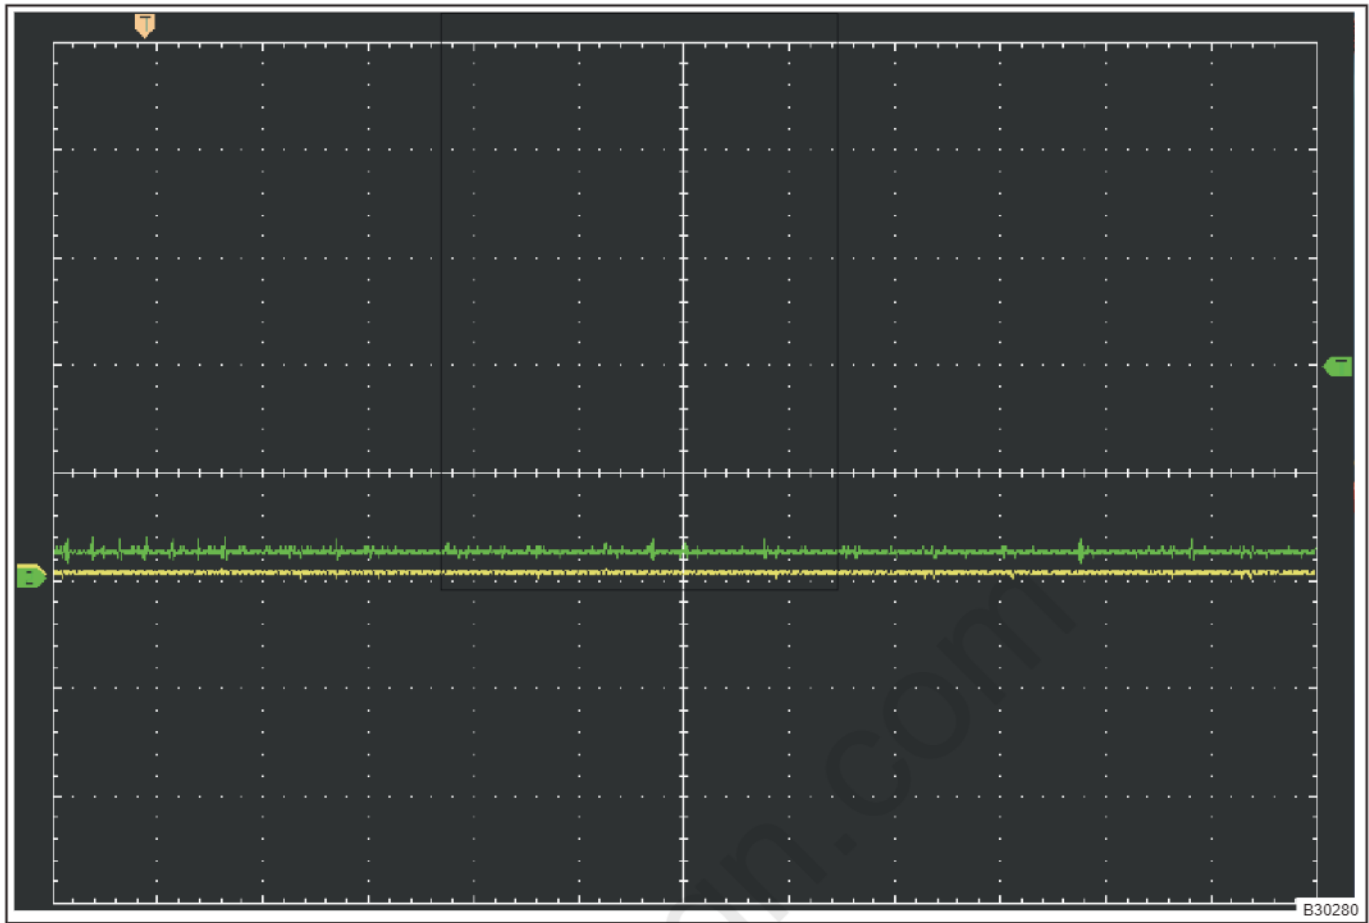

Malfunction symptoms:

- Observe with an oscilloscope: The voltage potential of CAN-H line is placed at 0 V, and the voltage of CAN-L line is placed at about 0.2 V (near 0 V).

Malfunction causes

- Bus CAN-H is short to ground, node (module) malfunction.


Troubleshooting procedures:

- 1) Plug and unplug control unit on CAN bus one by one, and observe if the oscilloscope waveform becomes normal?
- 2) If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
- 3) When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.


In the short circuit waveform to ground in CAN-H during actual vehicle test, the voltage potential of CAN-H line is placed at 0 V, and the recessive voltage of CAN-L line is placed at approximately 0.2 V. Power CAN and body CAN, CAN-H short to ground, vehicles can not start.

- (5) Short to ground in CAN-L

Malfunction waveform

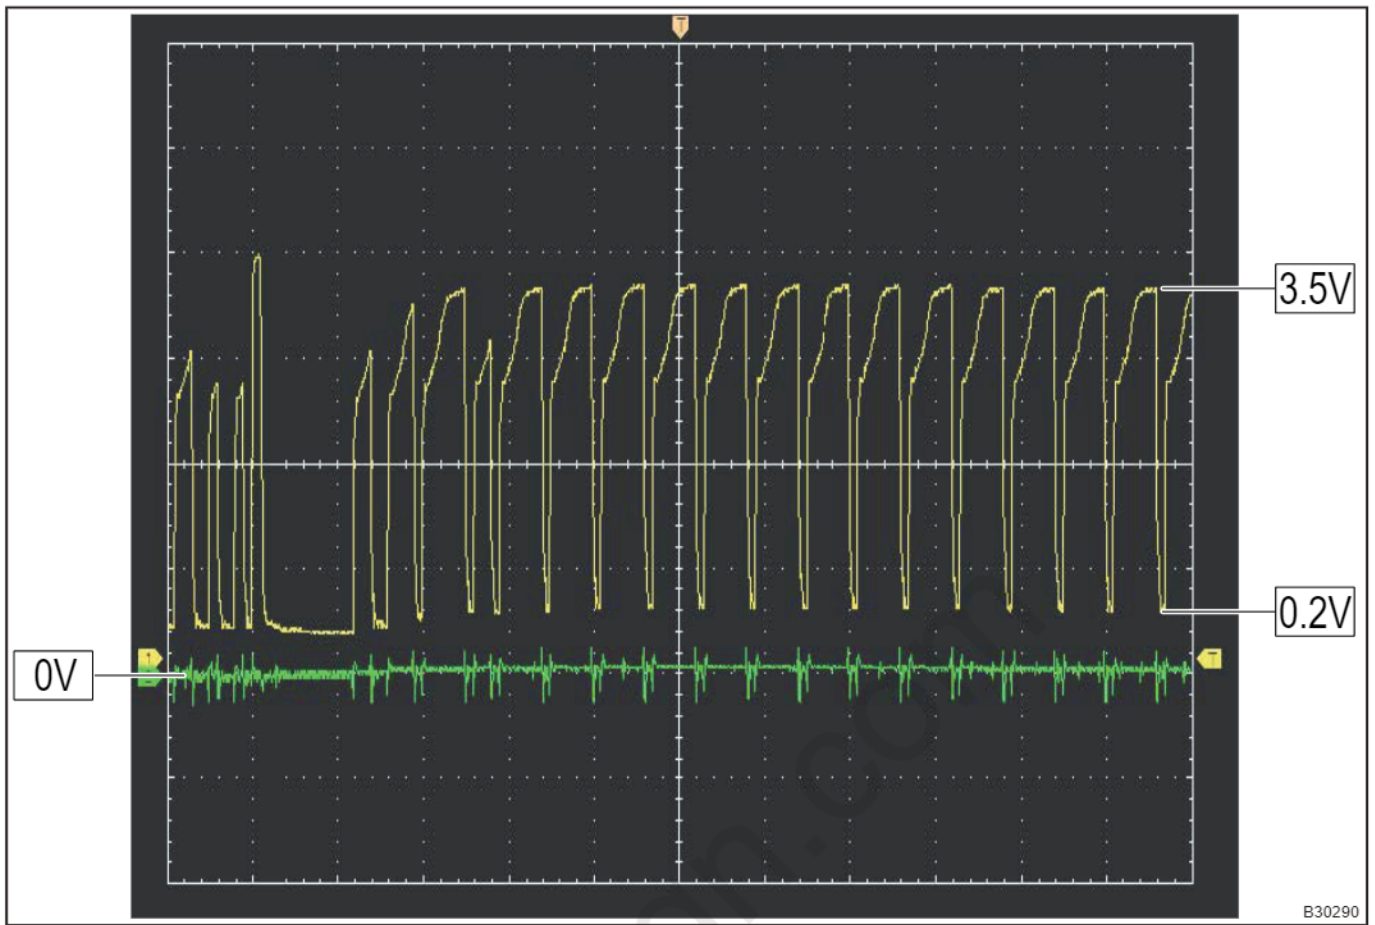

CAN malfunction waveform

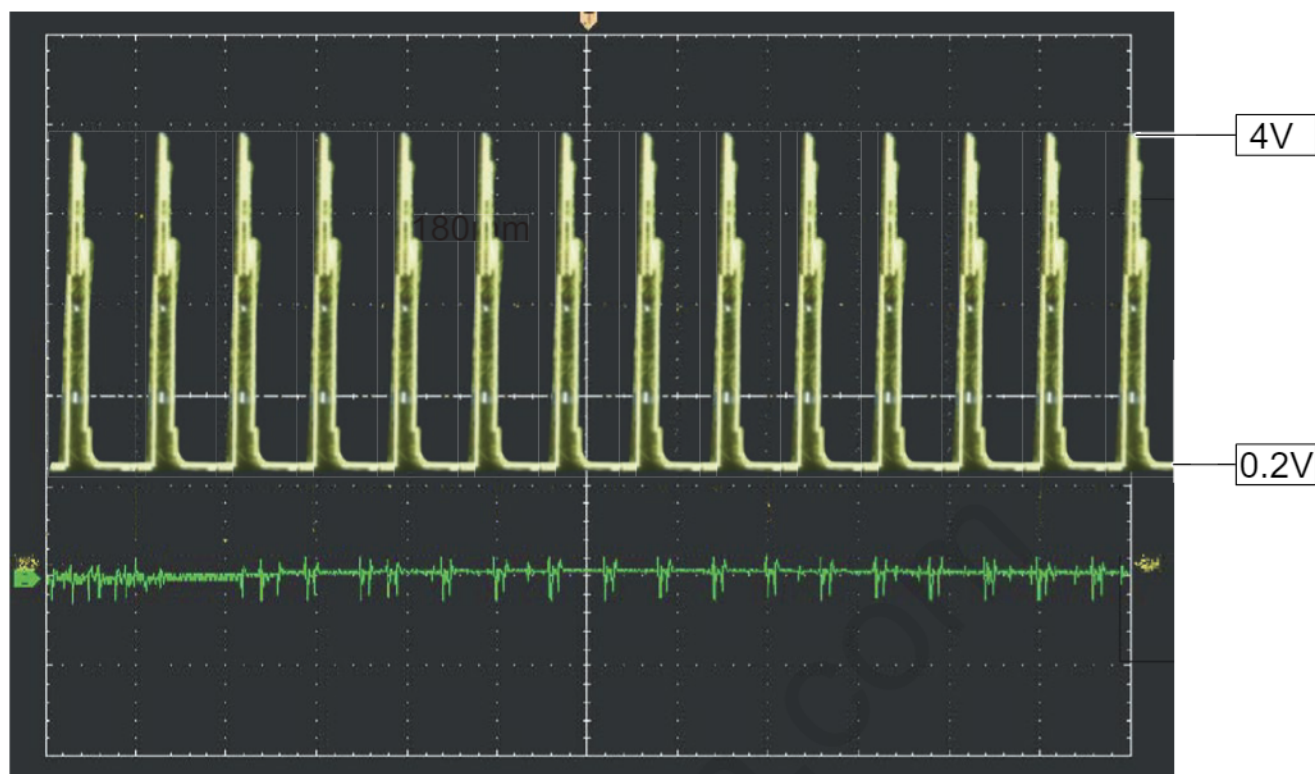

B30300

Malfunction symptoms:

- Observe with an oscilloscope: The voltage of CAN-L is approximately 0 V, and the recessive voltage of CAN-H line is also reduced to 0.2 V (near 0 V). Malfunction cause: Bus CAN-L is short to ground, node (module) malfunction.


Troubleshooting procedures:

- 1) By plugging and unplugging control unit on CAN bus one by one and observing oscilloscope waveform at the same time, it can be judged whether it is a short circuit caused by the control unit or by the CAN-L line ground;
- 2) If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
- 3) When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.

In the short circuit waveform to ground of CAN-L during actual vehicle test, the voltage potential of CAN-L line is placed at 0 V. Power CAN and body CAN, CAN-L short to ground, vehicles can not start.

- (6) CAN-L short to power supply

Malfunction waveform

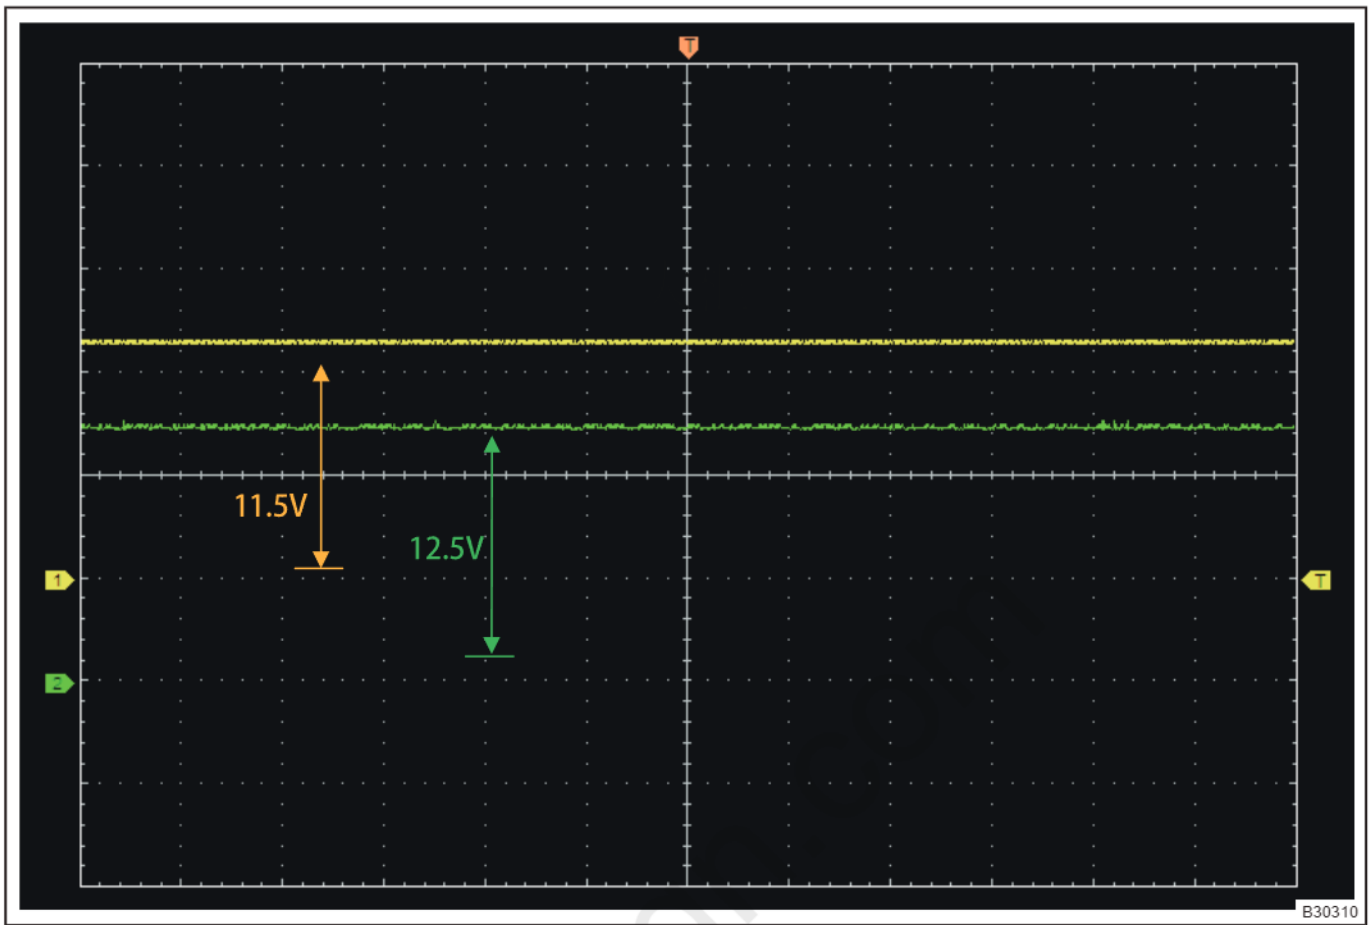

Malfunction symptoms:

- Observe with an oscilloscope: Both bus voltages are approximately 12 V, and waveforms are straight lines.

Malfunction cause: Bus CAN-L is short to power supply, node (module) malfunction.


Troubleshooting procedures:

- 1) By plugging and unplugging control unit on CAN bus one by one and observing oscilloscope waveform at the same time, it can be judged that the short circuit is caused by the control unit or short circuit to power supply in CAN-L line;
- 2) If the waveform returns to normal when unplugging the connector of a module, this module is malfunctioning;
- 3) When there is no other measurement method, only CAN line can be disconnected from line connection point. Pay attention to maintenance instructions of CAN line.

After short circuit between CAN-L and power supply is judged during real vehicle test, power CAN and body CAN and CAN- L are short to power supply, and vehicle cannot start.

4 ON-VEHICLE SERVICE

4.1 Tools

Tool Name	Tool Drawing
X-431 PAD Diagnostic Tester	 RCH0001006
Digital Multimeter	 RCH000206
Oscilloscope	 RCH006106

Hint:

- Oscilloscopes are available in the market as a general tool. Chery does not provide this tool.
- As a general diagnostic method, oscilloscope diagnosis can be replaced by other diagnostic methods.


4.2 Gateway Module (CGW)

■ Removal

Caution
• Read configuration code of CGW module and record it with a diagnostic tester, before removing gateway module. • Try to prevent interior and body paint surface from being scratched, when removing gateway module.

- (1) Turn ENGINE START STOP switch to OFF.
- (2) Disconnect the negative battery cable.
- (3) Remove the instrument panel assembly.

- (4) Remove 2 fixing nuts from gateway bracket, disconnect connector (1) from gateway module, and remove gateway module.

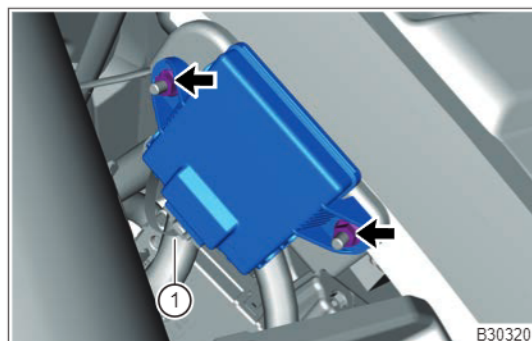


■ Installation

- (1) Installation is in the reverse order of removal.
- (2) Write configuration code with diagnostic tester to check module for proper operation after installation.


■ Matching Learning

■ Writing VIN Code


- (1) Connect the diagnostic tester, turn ENGINE START STOP switch to ON and select model, then enter "CGW" .
- (2) Click "Special Function" .

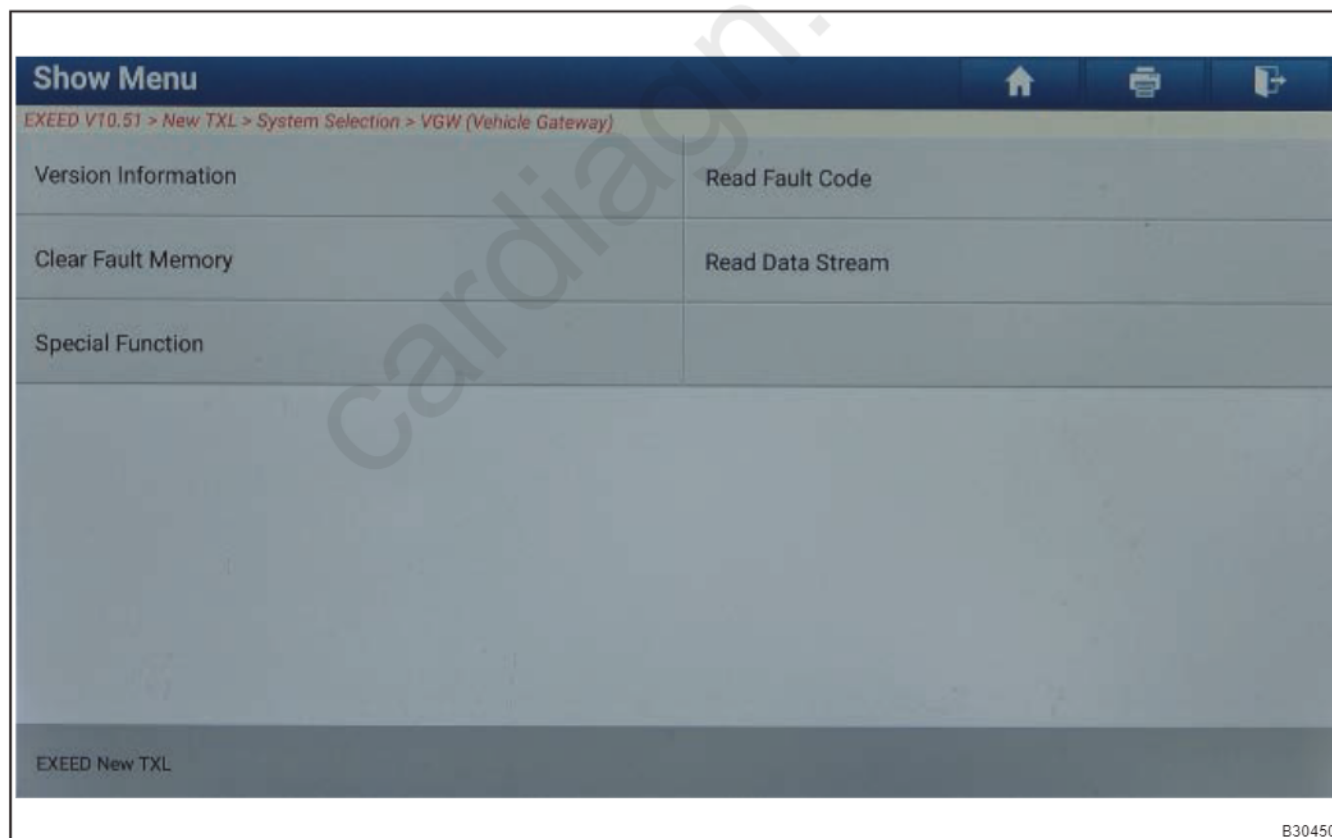

- (3) Select Special Function and click "Write VIN Code" .

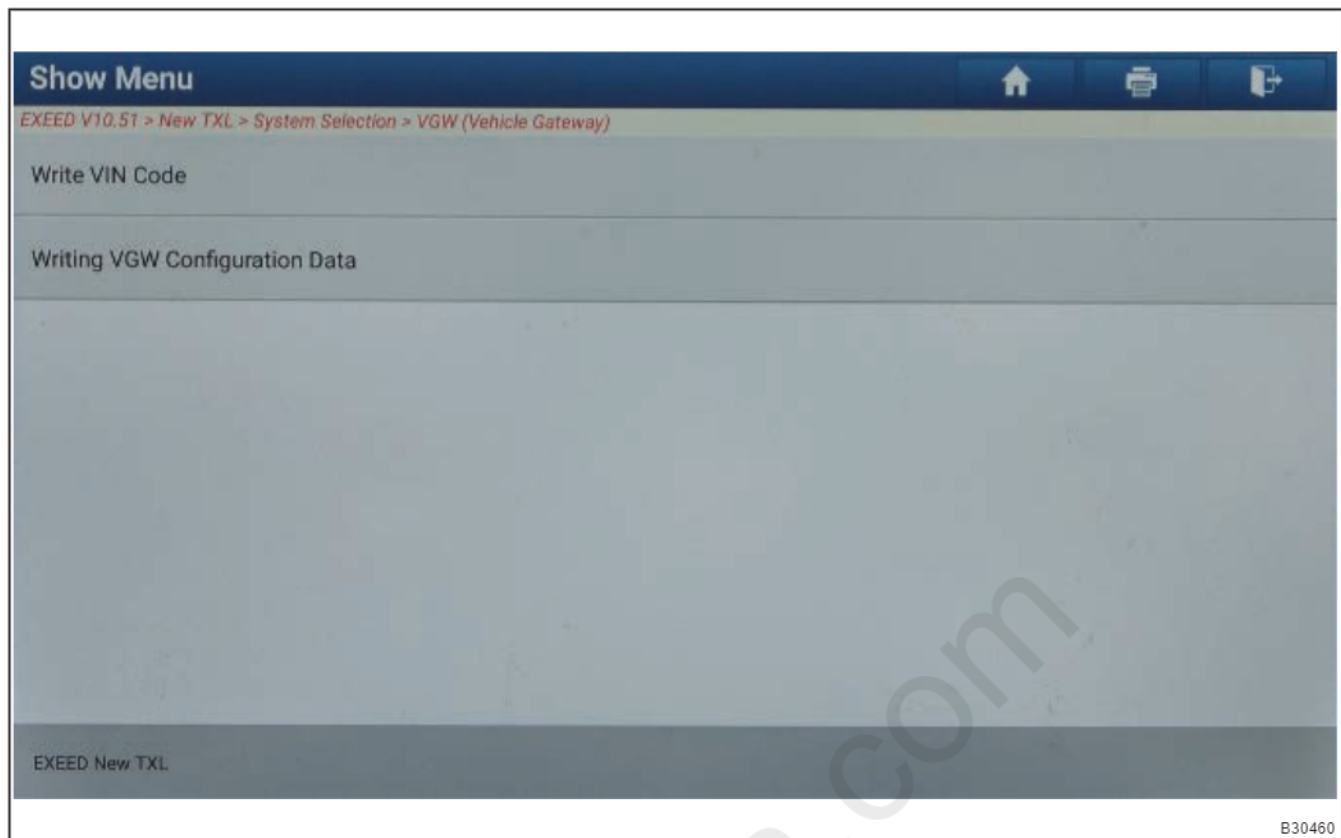


- (4) Enter next screen, determine if VIN code is correct, if correct, click “OK” , if not, click “NO” to input manually.

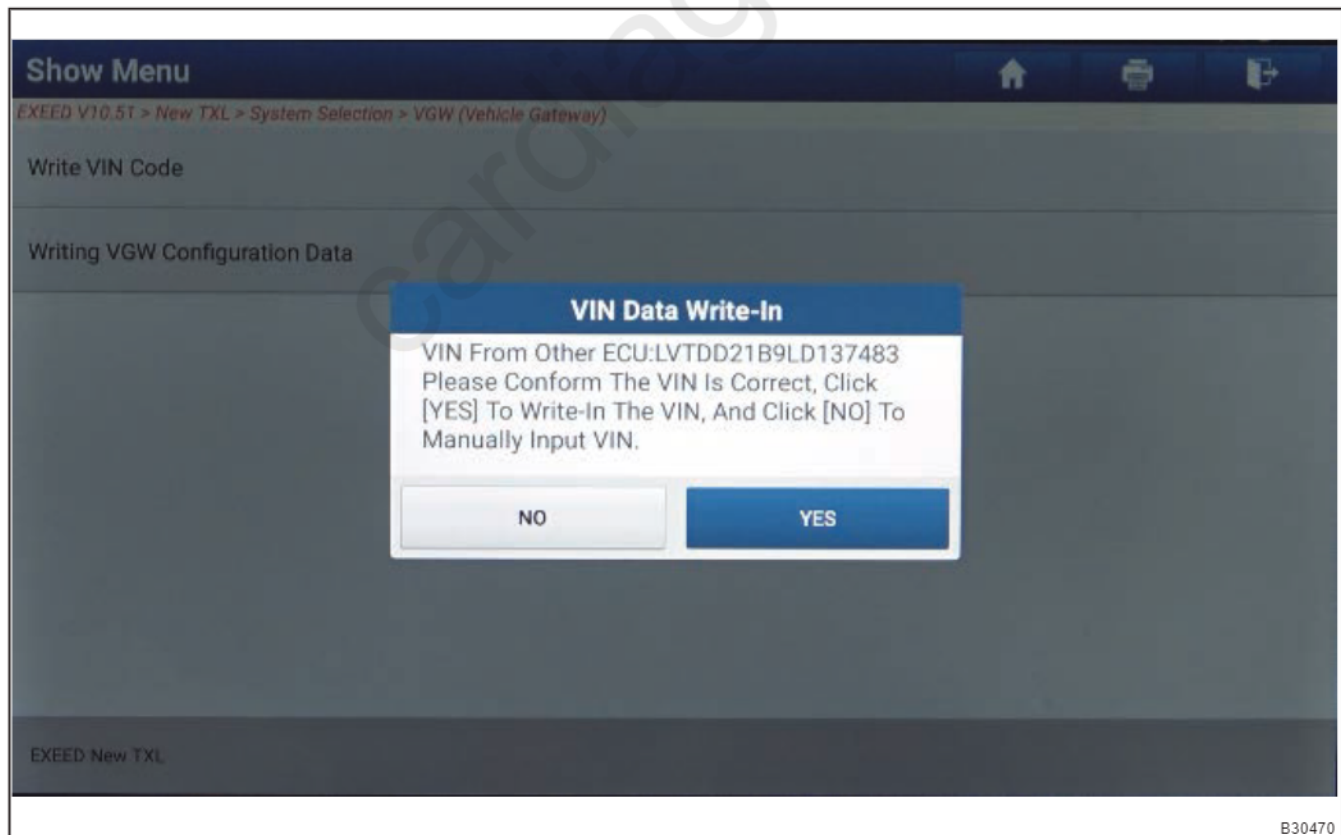


■ Saving Configuration Data

- (1) Click "VGW (Vehicle Gateway Module)" .
- (2) Click "Special Function" .

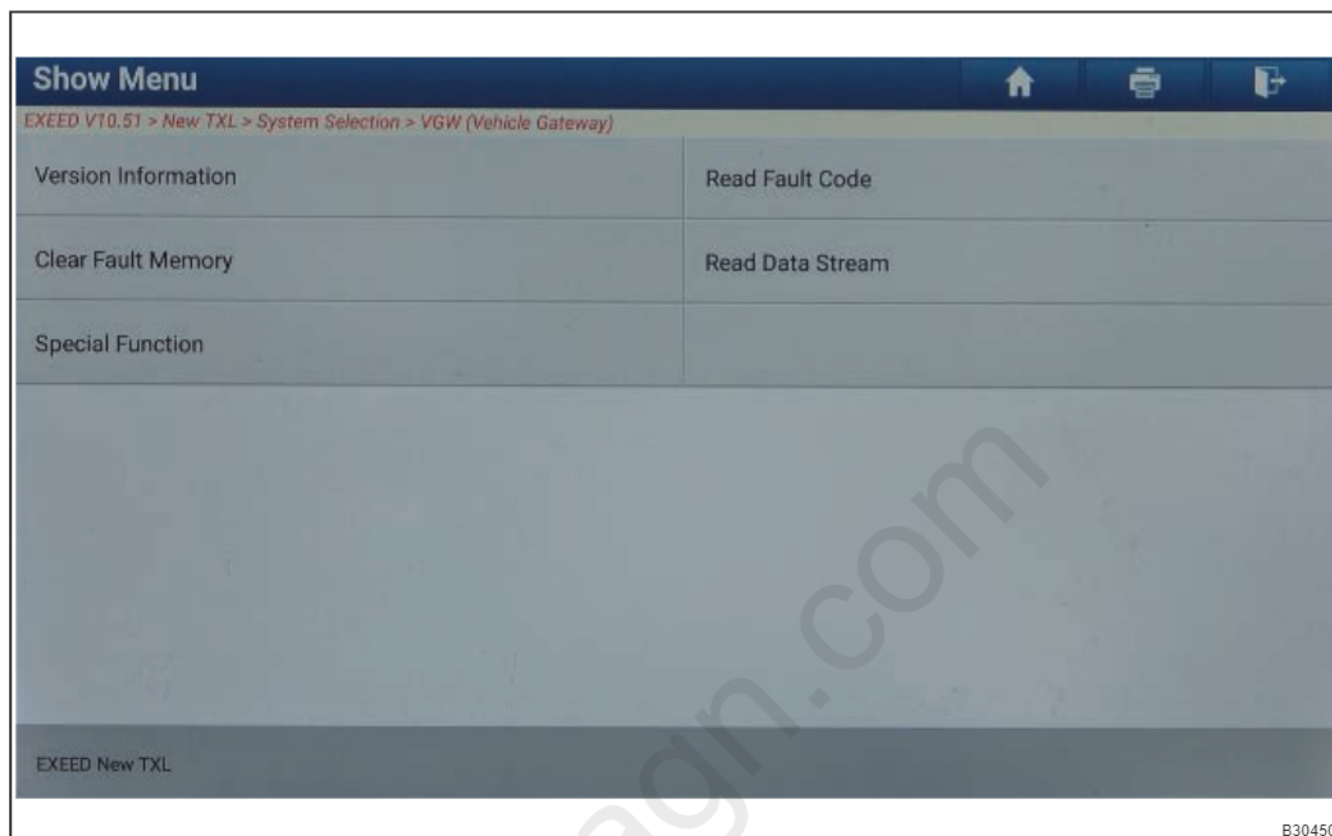


- (3) Click "Writing VGW Configuration Data" .

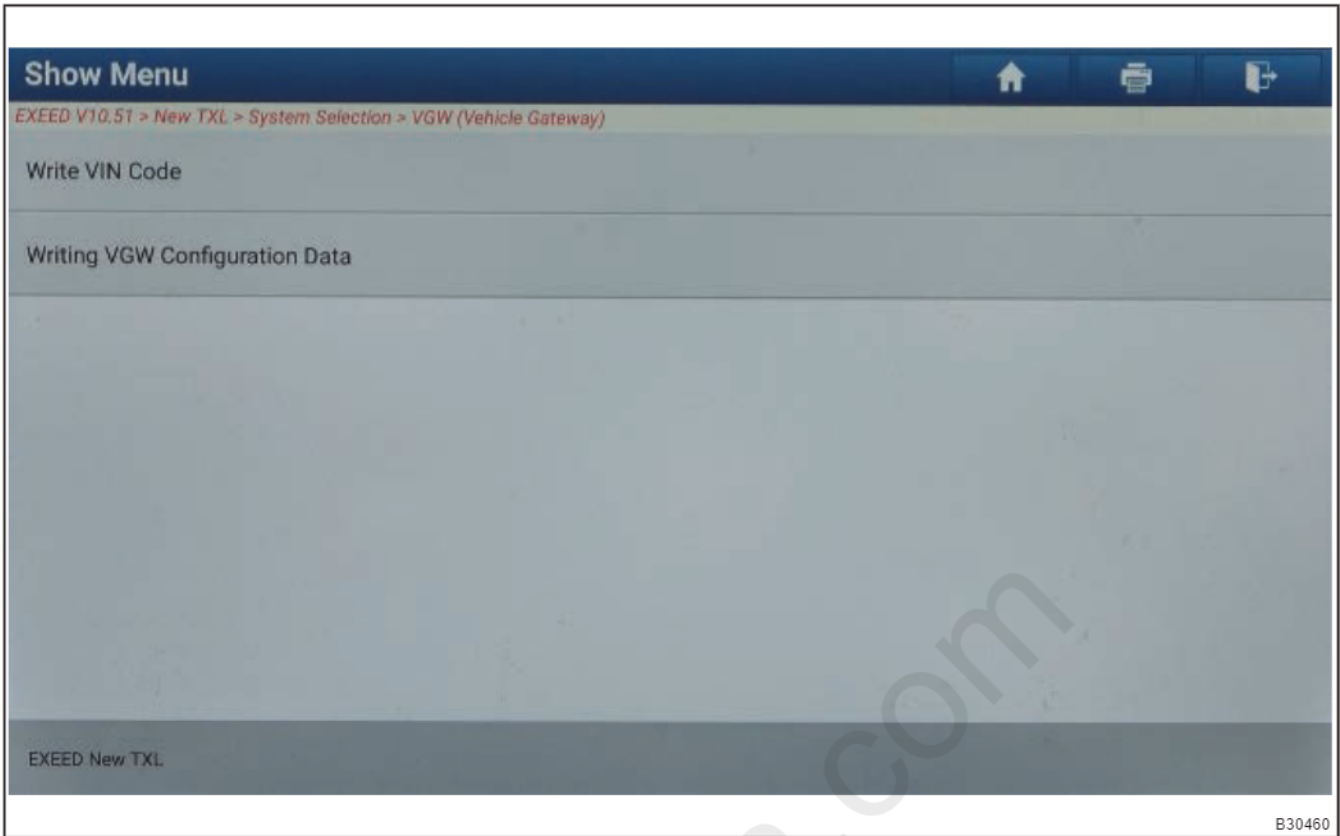


B30460

- (4) Click “Save And Paste (Transfer The Configuration Data In The Old Controller To The New Controller)” .

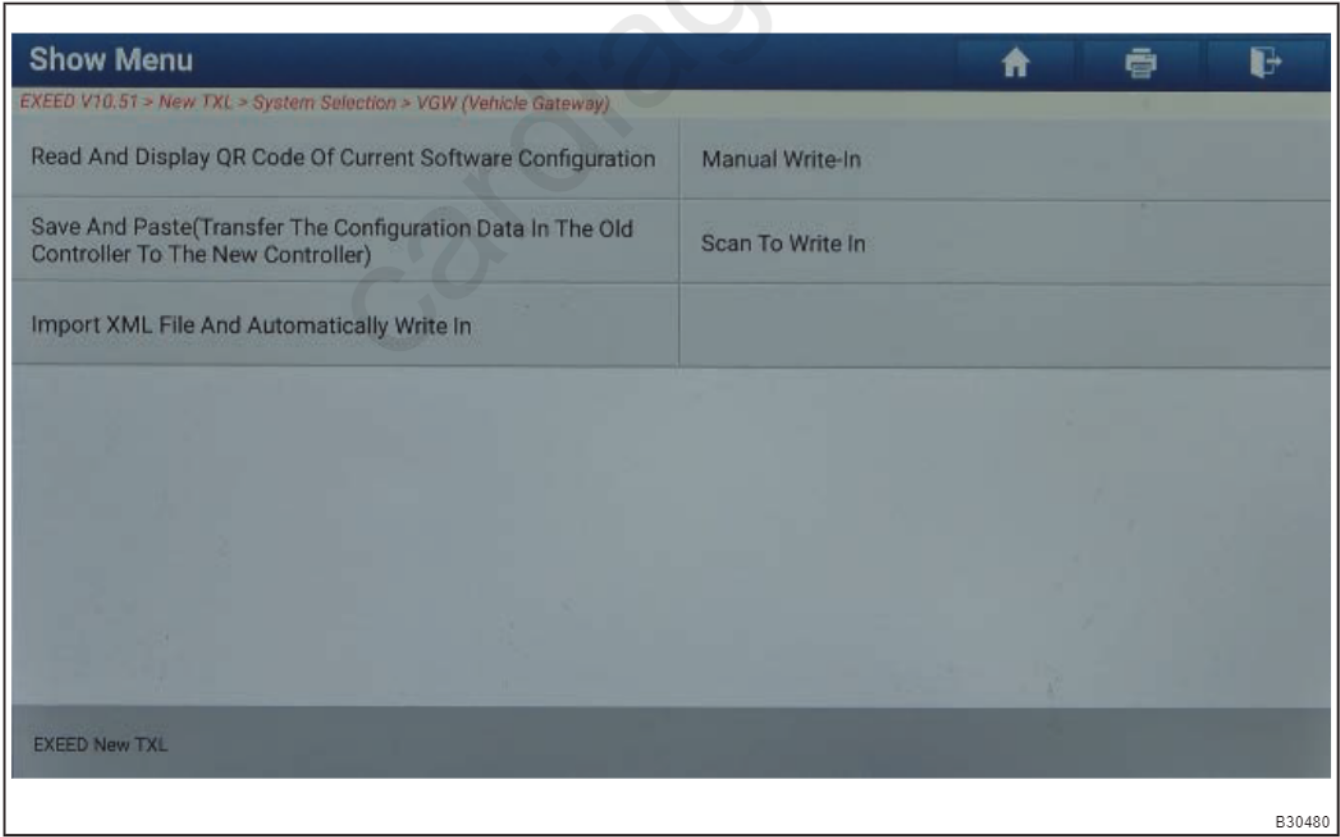


B30480

- (5) Click “Save The Old Controller Configuration Data” .

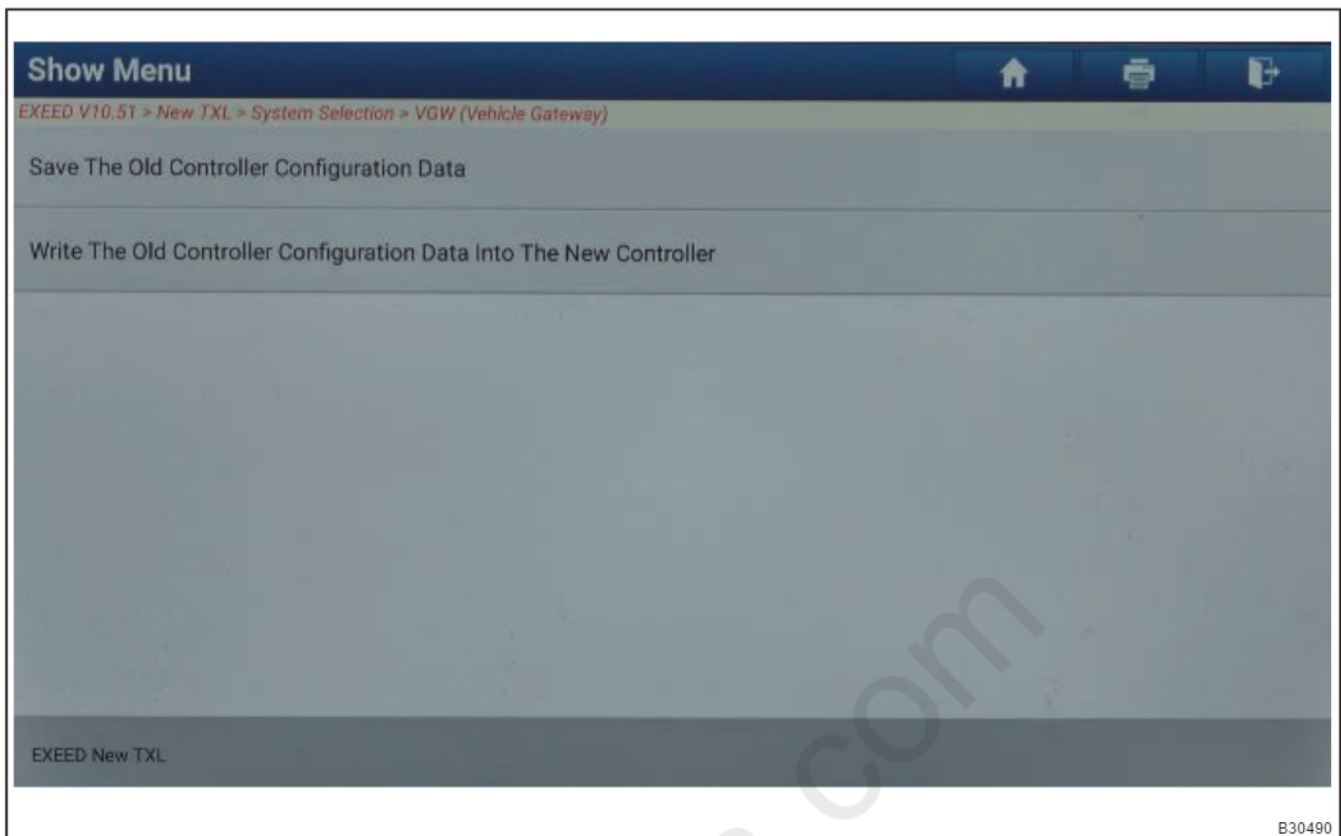

B30490


(6) The diagnostic tester interface shows “Read Vehicle Configuration Information Successfully” .

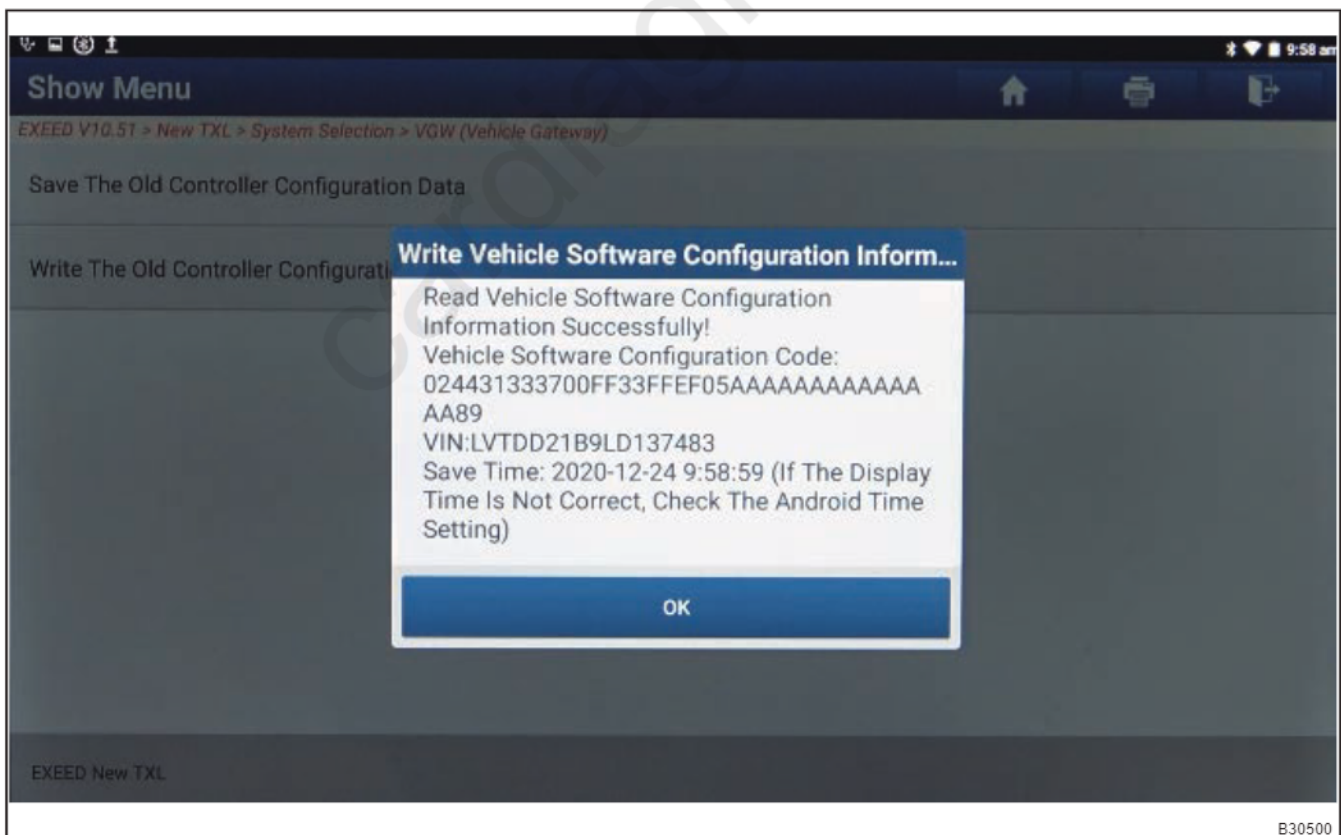

B30500


■ Writing VGW Configuration Data

(1) Click “Writing VGW Configuration Data” .

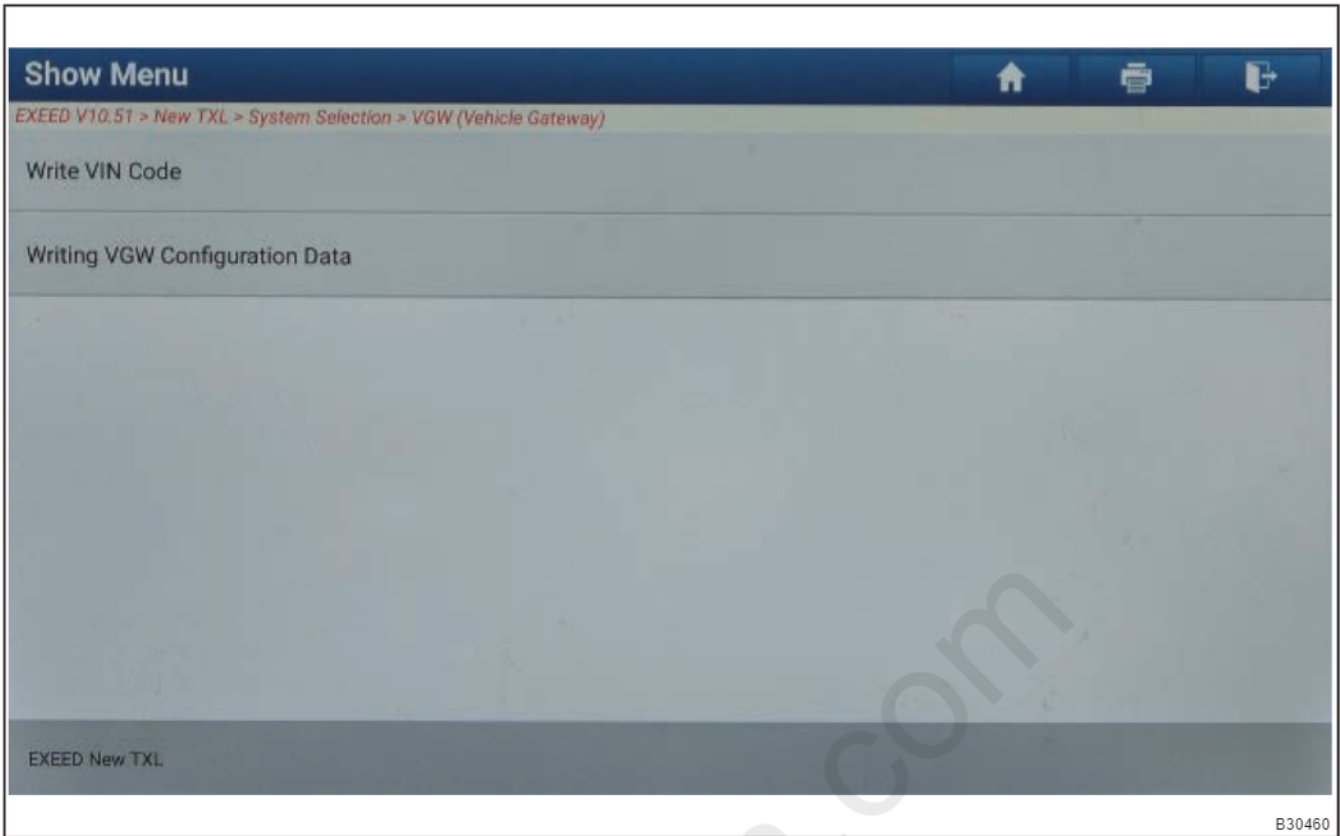


B30460

- (2) Click “Save And Paste (Transfer The Configuration Data In The Old Controller To The New Controller)” .

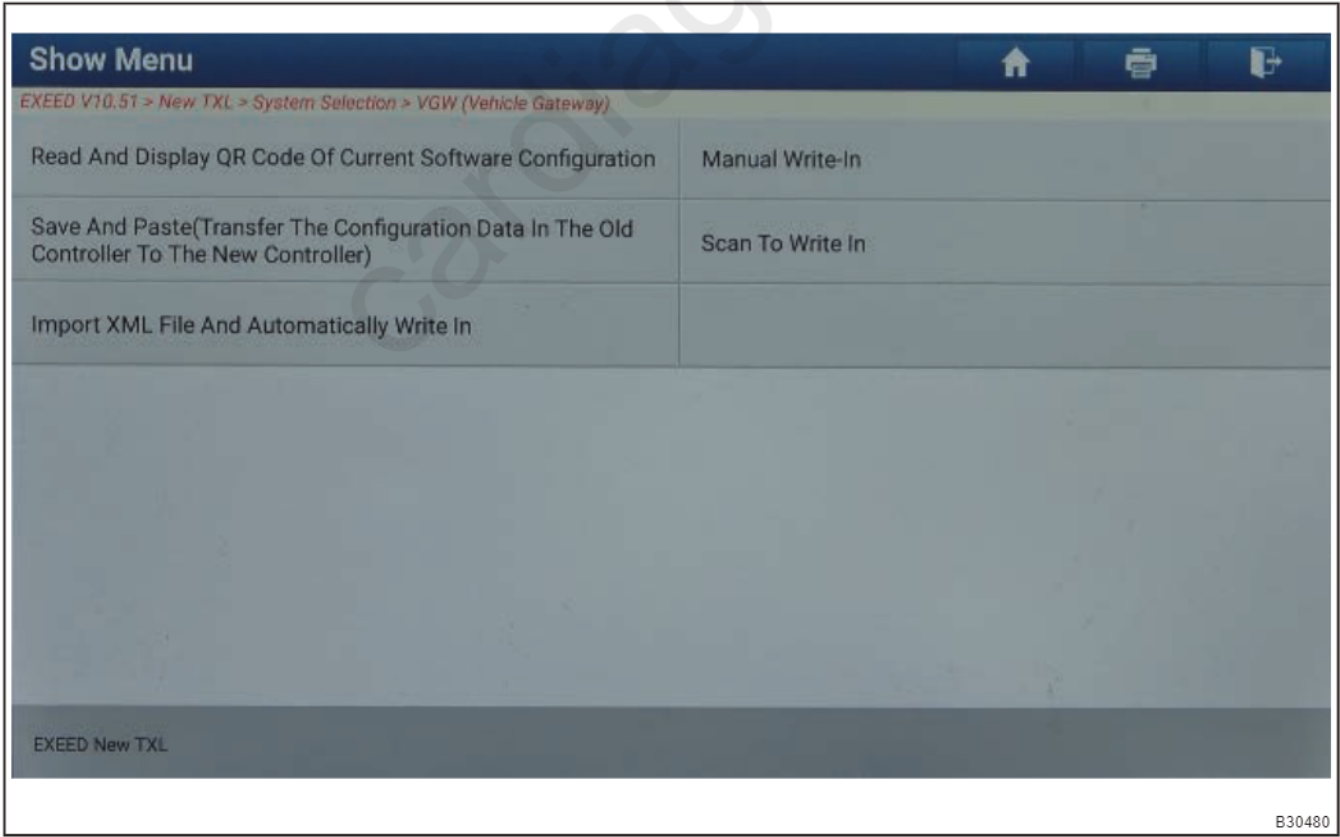


B30480

- (3) Click “Write The Old Controller Configuration Data Into The New Controller” .

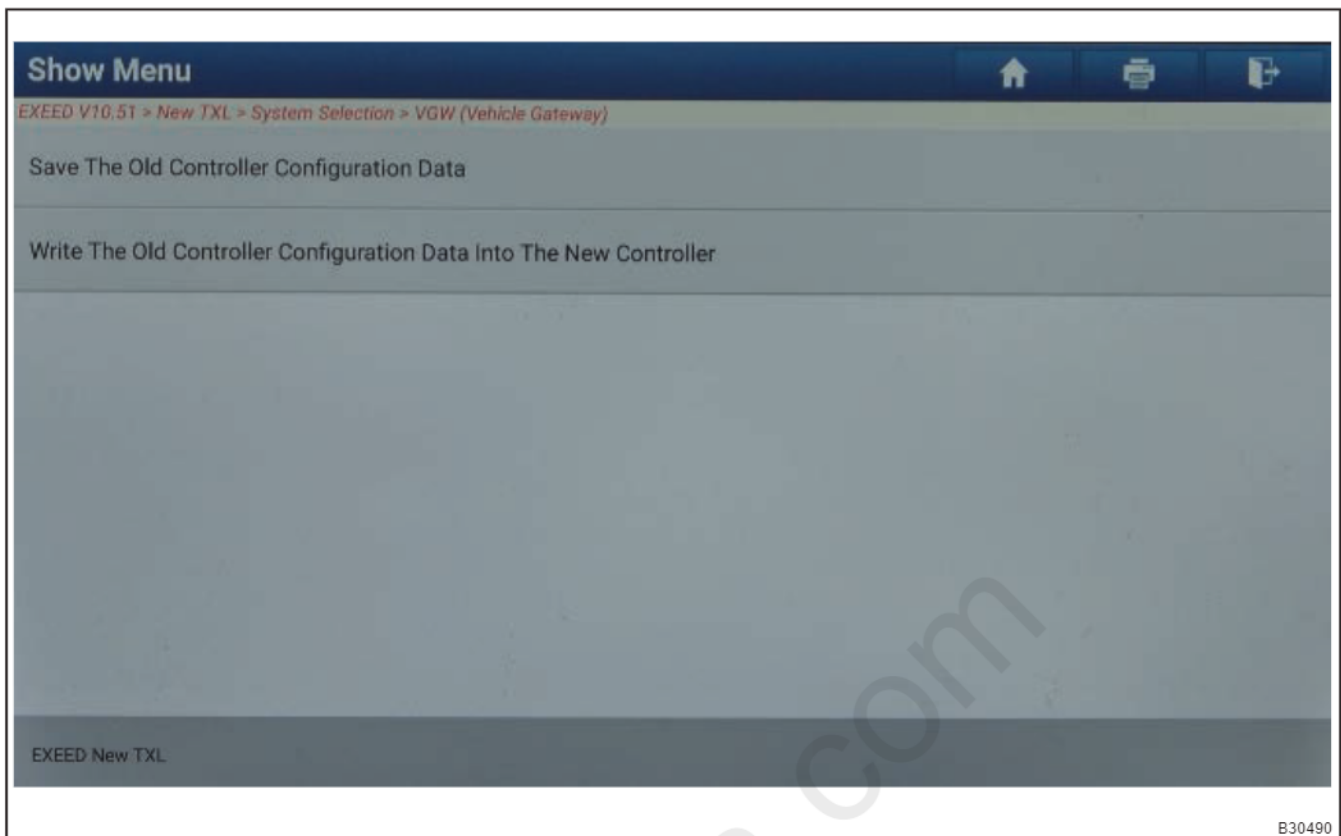

(4) The diagnostic tester interface shows "Please Enter 12-Digit Repair Code" .

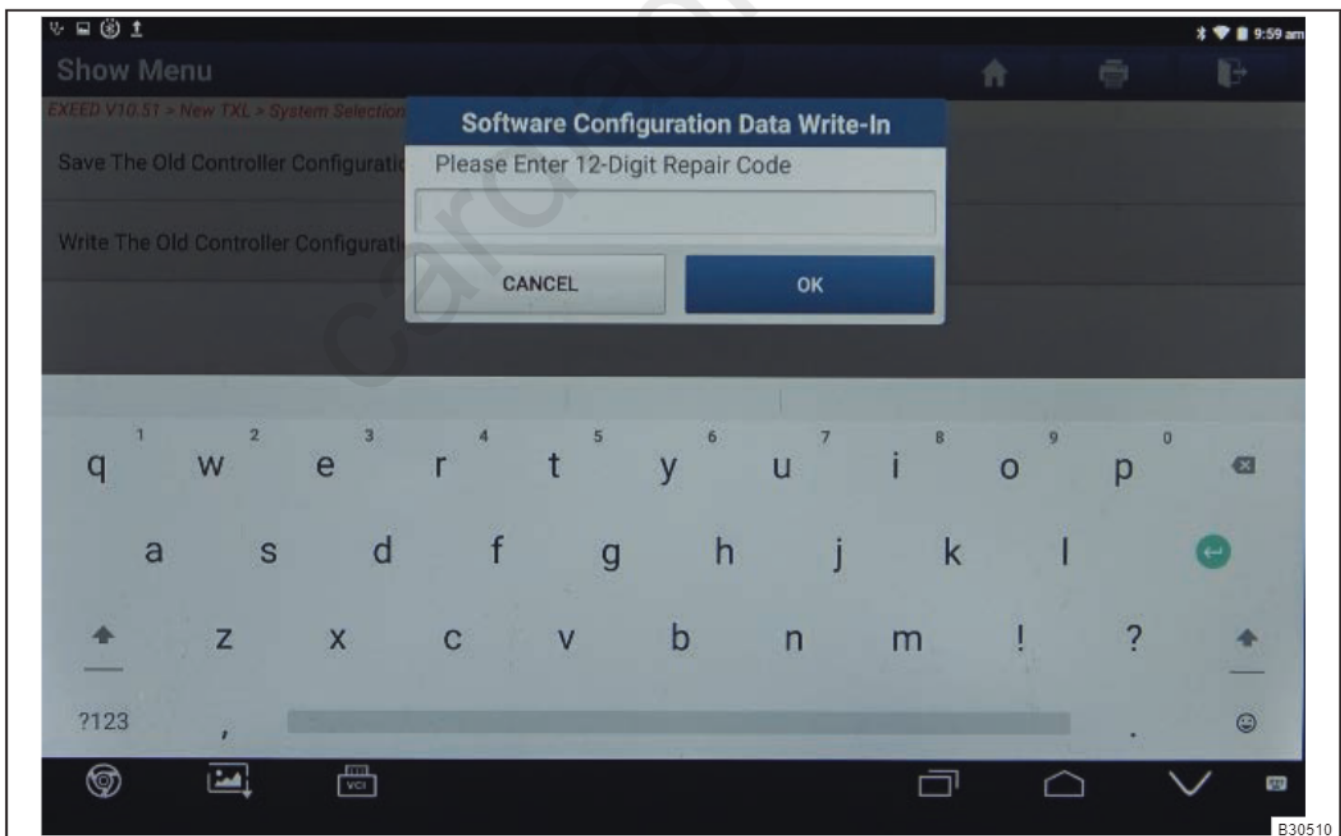

(5) Click "OK" after entering.

(6) Click "YES" after confirming that repair shop code is correct again.

- (7) The diagnostic tester interface shows "Saved Vehicle Configuration Code Last Time" . Click "Yes" after confirming that they are consistent.
- (8) The diagnostic tester interface shows "Write Configuration Data Successfully" .
- (9) Click "OK" .
- (10) The diagnostic tester interface prompts "Configuration Data Check is Valid" , then configuration data check is valid, click "OK" click "OK" .

cardiagn.com