
GROUP 5

SYNTHETIC-RESIN PARTS


CONTENTS

LOCATION OF SYNTHETIC-RESIN PARTS	5-2
--	-----


LOCATION OF SYNTHETIC-RESIN PARTS

M4050001002124

The location and material of each of the principal synthetic-resin parts are shown below.

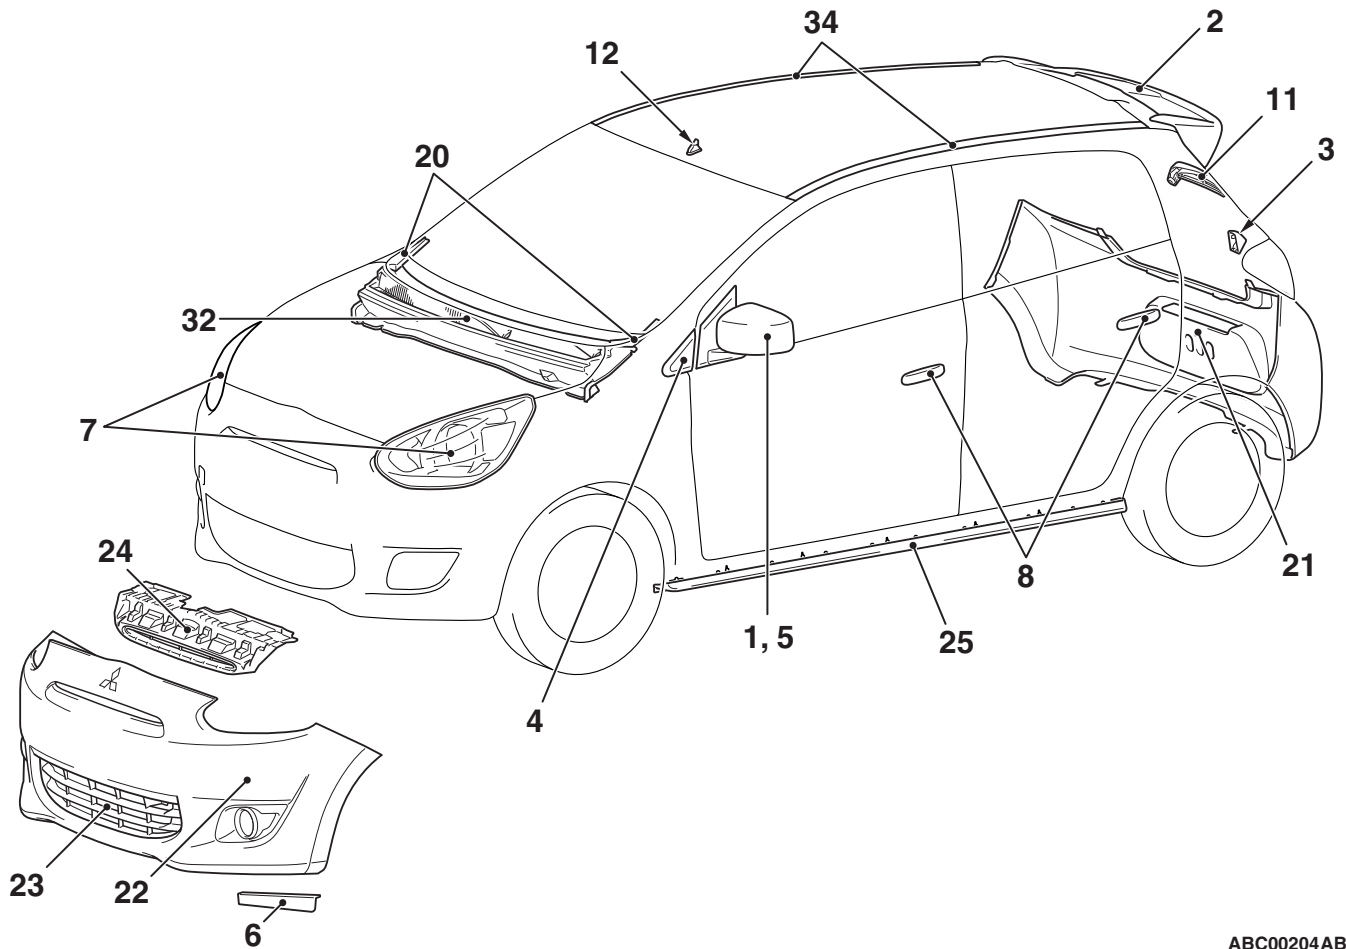

ABC00204AB

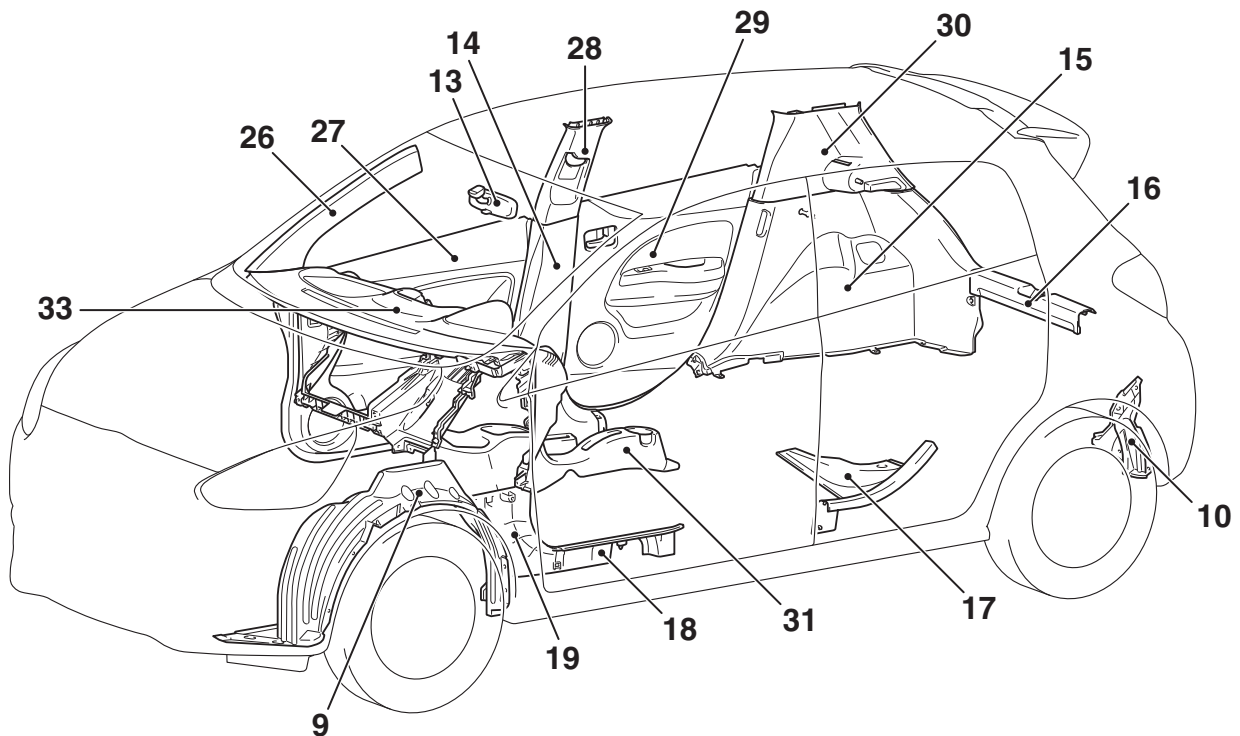

ABC00205AB

No.	Part Name	Name Of Resin	Abbreviation	Heat-resistant Temp [°C (°F)]
1	Door mirror outer cover (color)	Acrylonitrile butadiene styrene	ABS	80 (176)
2	Liftgate spoiler			
3	Rear view camera cover			
4	Front delta garnish	Acrylonitrile styrene acrylate	ASA	80 (176)
5	Door mirror outer cover (black)			
6	Front side air dam	Ethylene Propylene diene terpolymer	EPDM	80 (176)
7	Headlight	Polycarbonate	PC	120 (248)
8	Door outside handle	Polycarbonate+Polyethylene terephthalate	PC+PET	120 (248)
9	Front wheelhouse splash shield	High density polyethylene	PE-HD	70 – 90 (158 – 194)
10	Rear wheelhouse splash shield			
11	Rear wiper arm	Polyethylene terephthalate	PET	80 (176)
12	Antenna base	Polypropylene	PP	80 (176)
13	Inside rear view mirror			
14	Lower center pillar trim			
15	Quarter trim lower			
16	Rear end trim			
17	Rear scuff plate			
18	Front scuff plate			
19	Cowl side trim			
20	Front deck garnish cover	Polypropylene+Ethylene Propylene diene terpolymer	PP+EPDM	80 (176)
21	Rear bumper face	Talc filled rubber modified polypropylene (10%)	PP+E/P-TD10	80 (176)
22	Front bumper face			
23	Front bumper under grille			
24	Front bumper grille			
25	Side air dam	Talc filled rubber modified polypropylene (30%)	PP+E/P-TD30	110 (230)
26	Front pillar trim	Talc filled polypropylene (10%)	PP-TD10	110 – 120 (230 – 248)
27	Front door trim			
28	Upper center pillar trim			
29	Rear door trim			
30	Quarter trim upper			
31	Floor console assembly			
32	Front deck garnish	Talc filled polypropylene (20%)	PP-TD20	120 – 130 (248 – 266)
33	Instrument panel			
34	Roof drip molding	Polyvinyl chloride	PVC	80 (176)

NOTE:

- A slash (/) in the material symbol indicates that two different materials make two-layer construction. A plus sign (+) indicates that the two different materials mix each other.
- The indicated heat-resistant temperature for parts which are composed of two or more types of material is the value for the material with the lowest heat-resistant temperature.
- The material symbols for synthetic-resin parts are embossed on the parts in hidden places.